

MARSHALL ISLANDS FILE TRACKING DOCUMENT

Record Number: 381

File Name (TITLE): Manufacturing of Ballad,
Op. Redwing

Document Number (ID): WT-1317 (EX)

DATE: 3/1961

Previous Location (FROM): CIC

AUTHOR: USNRAL

Additional Information: _____

OrMIbox: 21

CyMIbox: _____

OPERATION REDWING

40985

Project 2.63 Characterization of Fallout

Pacific Proving Grounds
May-July 1956

Headquarters Field Command
Defense Atomic Support Agency
Sandia Base, Albuquerque, New Mexico
March 15, 1961

NOTICE

This is an extract of WT-1317, which
remains classified SECRET/RESTRICTED DATA
as of this date.

Extract version prepared for:

Director
DEFENSE NUCLEAR AGENCY
Washington, D.C. 20305

1 JUNE 1982

**Approved for public release;
distribution unlimited.**

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER WT-1317 (EX)	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Operation REDWING - Project 2.63, Characterization of Fallout		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER WT-1317 (EX)
7. AUTHOR(s) T. Triffet, Project Officer P. D. LaRiviere		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS US Naval Radiological Defense Laboratory San Francisco, California		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Headquarters, Field Command Defense Atomic Support Agency Sandia Base, Albuquerque, New Mexico		12. REPORT DATE March 15, 1961
		13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; unlimited distribution.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES This report has had the classified information removed and has been republished in unclassified form for public release. This work was performed by Kaman Tempo under contract DNA001-79-C-0455 with the close cooperation of the Classification Management Division of the Defense Nuclear Agency.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Operation REDWING Fallout Surface Radiation		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The general objective was to obtain data sufficient to characterize the fallout, interpret the aerial and oceanographic survey results, and check fallout-model theory for Shots Cherokee, Zuni, Flathead, Navajo, and Tewa during Operation REDWING. Detailed measurements of fallout buildup were planned. Measurements of radiation characteristics and physical, chemical, and radiochemical properties of individual solid and slurry particles and total cloud and fallout samples were also planned, along with determinations of the surface densities of activity and environmental components in the fallout at each major station.		

FOREWORD

This report has had classified material removed in order to make the information available on an unclassified, open publication basis, to any interested parties. This effort to declassify this report has been accomplished specifically to support the Department of Defense Nuclear Test Personnel Review (NTPR) Program. The objective is to facilitate studies of the low levels of radiation received by some individuals during the atmospheric nuclear test program by making as much information as possible available to all interested parties.

The material which has been deleted is all currently classified as Restricted Data or Formerly Restricted Data under the provision of the Atomic Energy Act of 1954, (as amended) or is National Security Information.

This report has been reproduced directly from available copies of the original material. The locations from which material has been deleted is generally obvious by the spacings and "holes" in the text. Thus the context of the material deleted is identified to assist the reader in the determination of whether the deleted information is germane to his study.

It is the belief of the individuals who have participated in preparing this report by deleting the classified material and of the Defense Nuclear Agency that the report accurately portrays the contents of the original and that the deleted material is of little or no significance to studies into the amounts or types of radiation received by any individuals during the atmospheric nuclear test program.

ABSTRACT

The general objective was to obtain data sufficient to characterize the fallout, interpret the aerial and oceanographic survey results, and check fallout-model theory for Shots Cherokee, Zuni, Flathead, Navajo, and Tewa during Operation Redwing. Detailed measurements of fallout buildup were planned. Measurements of the radiation characteristics and physical, chemical, and radiochemical properties of individual solid and slurry particles and total cloud and fallout samples were also planned, along with determinations of the surface densities of activity and environmental components in the fallout at each major station.

Standardized instruments and instrument arrays were used at a variety of stations which included three ships, two barges, three rafts, thirteen to seventeen deep-anchored skiffs, and four islands at Bikini Atoll. Total and incremental fallout collectors and gamma time-intensity recorders were featured in the field instrumentation. Special laboratory facilities for early-time studies were established aboard one ship. A number of buried trays with related survey markers were located in a cleared area at one of the island stations. Instrument failures were few, and a large amount of data was obtained.

This report summarizes the times and rates of arrival, times of peak and cessation, mass-arrival rates, particle-size variation with time, ocean-penetration rates, solid- and slurry-particle characteristics, activity and fraction of device deposited per unit area, surface densities of chemical components, radionuclide compositions with corrections for fractionation and induced activities, and photon and air-ionization decay rates. A number of pertinent correlations are also presented: predicted and observed fallout patterns are compared, sampling bias is analyzed, gross-product decay is discussed in relation to the $t^{-1.2}$ rule, fraction-of-device calculations based on chemical and radiochemical analyses are given, the relationship of film-dosimeter dose to gamma time-intensity integral is considered, a comparison is made between effects computed from radiochemistry and gamma spectrometry, air-sampling measurements are interpreted, and the fallout effects are studied in relation to variations in the ratio of fission yield to total yield.

Some of the more-important general conclusions are summarized below:

The air burst of Shot Cherokee produced no fallout of military significance.

Fallout-pattern locations and times of arrival were adequately predicted by model theory.

Activity-arrival-rate curves for water-surface and land-surface shots were similar, and were well correlated in time with local-field ionization rates.

Particle-size distributions from land-surface shots varied continuously with time at each station, with the concentration and average size appearing to peak near time-of-peak radiation rate; the diameters of barge-shot fallout droplets, on the other hand, remained remarkably constant in diameter at the ship stations.

Gross physical and chemical characteristics of the solid fallout particles proved much the same as those for Shot Mike during Operation Ivy and Shot Bravo during Operation Castle. New information was obtained, however, relating the radiochemical and physical characteristics of individual particles. Activity was found to vary roughly as the square of the diameter for irregular particles, and as some power greater than the cube of the diameter for spheroidal particles.

Fallout from barge shots consisted of slurry droplets, which were composed of water, sea salts, and radioactive solid particles. The latter were spherical, generally less than 1 micron in diameter, and consisted mainly of oxides of calcium and iron. At the ship locations, the solid particles contained most of the activity associated with the slurry droplets; close in, however, most of the activity was in soluble form.

Bulk rate of penetration of fallout in the ocean was, under several restrictions, similar for both solid and slurry particles. Estimates are given of the amount of activity which may have

been lost below the thermocline for the fast-settling fraction of solid-particle fallout.

Fractionation of radionuclides from Shot Zuni was severe while that from Shot Tewa was moderate; Shots Flathead and Navajo were nearly unfractionated. Tables are provided, incorporating fractionation corrections where necessary, which allow the ready calculation of infinite-field ionization rates, and the contribution of individual induced activities to the total ionization rate.

Best estimates are given of the amount of activity deposited per unit area at all sampling stations. Estimates of accuracy are included for the major stations.

FOREWORD

This report presents the final results of one of the projects participating in the military-effect programs of Operation Redwing. Overall information about this and the other military-effect projects can be obtained from WT-1344, the "Summary Report of the Commander, Task Unit 3." This technical summary includes: (1) tables listing each detonation with its yield, type, environment, meteorological conditions, etc.; (2) maps showing shot locations; (3) discussions of results by programs; (4) summaries of objectives, procedures, results, etc., for all projects; and (5) a listing of project reports for the military-effect programs.

PREFACE

Wherever possible, contributions made by others have been specifically referenced in the body of this report and are not repeated here. The purpose of this section is to express appreciation for the many important contributions that could not be referenced.

Suggestions fundamental to the success of the project were made during the early planning stages by C. F. Miller, E. R. Tompkins, and L. B. Werner. During the first part of the operation, L. B. Werner also organized and directed the analysis of samples at U. S. Naval Radiological Defense Laboratory (NRDL). Sample analysis at NRDL during the latter part of the operation was directed by P. E. Zigman, who designed and did much to set up the sample distribution center at Eniwetok Proving Ground (EPG) while he was in the field. C. M. Callahan was responsible for a large share of the counting measurements at NRDL and also contributed to the chemical analyses.

The coordination of shipboard construction requirements by J. D. Sartor during the preliminary phase, the assembly and checkout of field-laboratory instrumentation by M. J. Nuckolls and S. K. Ichiki, and the scientific staff services of E. H. Covey through the field phase were invaluable. Important services were also rendered by F. Kirkpatrick, who followed the processing of all samples at NRDL and typed many of the tables for the reports, V. Vandivert, who provided continuous staff assistance, and M. Wiener, who helped with the final assembly of this report.

Various NRDL support organizations performed outstanding services for the project. Some of the most notable of these were: the preparation of all report illustrations by members of the Technical Information Division, the final design and construction of the majority of project instruments by personnel from the Engineering Division, the packing and transshipment of all project gear by representatives of the Logistics Support Division, and the handling of all rad-safe procedures by members of the Health Physics Division. In this connection, the illustration work of I. Hayashi, the photographic work of M. Brooks, and the rad-safe work of W. J. Neall were particularly noteworthy.

The project is also indebted to the Planning Department (Design Division), and the Electronics Shop (67) of the San Francisco Naval Shipyard, for the final design and construction of the ship and barge platforms and instrument-control systems; and to U. S. Naval Mobile Construction Battalion 5, Port Hueneme, California, for supplying a number of field personnel.

The names of the persons who manned the field phase are listed below. Without the skills

and exceptional effort devoted to the project by these persons, the analyses and results presented in this report could not have been achieved:

Deputy Project Officer (Bikini): E. C. Evans III.

Deputy Project Officer (Ship): W. W. Perkins.

Director of Water Sampling: S. Baum.

Assistant Director of Laboratory Operations: N. H. Farlow.

Program 2 Control Center: E. A. Schuert (fallout prediction), P. E. Zigman, and W. J. Armstrong.

Eniwetok Operations: M. L. Jackson, V. Vandivert, E. H. Covey, A. R. Beckman, SN T. J. Cook, CD2 W. A. Morris, SW1 M. A. Bell, and SN I. W. Duma.

Laboratory Operations: C. E. Adams, M. J. Nuckolls, B. Chow, S. C. Foti, W. E. Shelberg, D. F. Covell, C. Ray, L. B. Werner, W. Williamson, Jr., M. H. Rowell, CAPT B. F. Bennett, S. Rainey, CDR T. E. Shea, Jr., and CDR F. W. Chambers.

Bikini Operations: J. Wagner, C. B. Moyer, R. W. Voss, CWO F. B. Rinehart, SWCN W. T. Veal, SN B. L. Fugate, and CE3 K. J. Neil. Barge Team: L. E. Egeberg (captain), T. E. Sivley, E. L. Alvarez, ET3 R. R. Kaste, CMG1 J. O. Wilson, SW2 W. L. Williamson, A. L. Berto, E. A. Pelosi, J. R. Eason, K. M. Wong, and R. E. Blatner. Raft Team: H. K. Chan (captain), F. A. Rhoads, SWCA W. L. Hampton, and SWCN H. A. Hunter. Skiff Team: LTJG D. S. Tanner (captain), M. J. Lipanovich, L. D. Miller, DM2 D. R. Dugas, and ET3 W. A. Smith.

Ship Operations: YAG-40 Team: E. E. Boetel, ET1 T. Wolf, ET3 J. K. LaCost, J. D. O'Connor and J. Mackin (water sampling), and CAPT G. G. Molumphy. YAG-39 Team: M. M. Bigger (captain), W. L. Morrison, ET1 W. F. Fuller, ET3 R. L. Johnson, and E. R. Tompkins (water sampling). LST-611 Team: F. A. French (captain), ENS H. B. Curtis, ET2 F. E. Hooley, and ET3 R. J. Wesp.

Rad-Safe Operations: J. E. Law, Jr., E. J. Leahy, R. A. Sulit, A. L. Smith, F. A. Devlin, B. G. Lindberg, G. E. Backman, L. V. Barker, G. D. Brown, L. A. Carter, C. K. Irwin, P. E. Brown, F. Modjeski, and G. R. Patterson.

CONTENTS

ABSTRACT	5
FOREWORD	7
PREFACE	7
CHAPTER 1 INTRODUCTION	15
1.1 Objectives	15
1.2 Background	15
1.3 Theory	16
1.3.1 General Requirements	16
1.3.2 Data Requirements	16
1.3.3 Special Problems and Solutions	17
1.3.4 Radionuclide Composition and Radiation Characteristics	17
1.3.5 Sampling Bias	17
1.3.6 Overall Approach	18
CHAPTER 2 PROCEDURE	19
2.1 Shot Participation	19
2.2 Instrumentation	19
2.2.1 Major Sampling Array	19
2.2.2 Minor Sampling Array	20
2.2.3 Special Sampling Facilities	21
2.2.4 Laboratory Facilities	22
2.3 Station Locations	24
2.3.1 Barges, Rafts, Islands, and Skiffs	24
2.3.2 Ships	24
2.4 Operations	25
2.4.1 Logistic	25
2.4.2 Technical	26
CHAPTER 3 RESULTS	42
3.1 Data Presentation	42
3.2 Buildup Characteristics	42
3.2.1 Rate of Arrival	42
3.2.2 Times of Arrival, Peak Activity, and Cessation	44
3.2.3 Mass-Arrival Rate	45
3.2.4 Particle-Size Variation	46
3.2.5 Ocean Penetration	47
3.3 Physical, Chemical, and Radiochemical Characteristics	49
3.3.1 Solid Particles	49
3.3.2 Slurry Particles	53
3.3.3 Activity and Fraction of Device	55
3.3.4 Chemical Composition and Surface Density	56
3.4 Radionuclide Composition and Radiation Characteristics	56
3.4.1 Approach	56

3.4.2	Activities and Decay Schemes	57
3.4.3	Instrument Response and Air-Ionization Factors	57
3.4.4	Observed Radionuclide Composition	58
3.4.5	Fission-Product-Fractionation Corrections	58
3.4.6	Results and Discussion	59
CHAPTER 4 DISCUSSION		113
4.1	Shot Cherokee	113
4.2	Data Reliability	114
4.3	Correlations	114
4.3.1	Fallout Predictions	114
4.3.2	Sampling Bias	115
4.3.3	Gross Product Decay	120
4.3.4	Fraction of Device by Chemistry and Radiochemistry	121
4.3.5	Total Dose by Dosimeter and Time-Intensity Recorder	121
4.3.6	Radiochemistry-Spectrometry Comparison	122
4.3.7	Air Sampling	122
4.3.8	Relation of Yield Ratio to Contamination Index	123
CHAPTER 5 CONCLUSIONS AND RECOMMENDATIONS		150
5.1	Conclusions	150
5.1.1	Operational	150
5.1.2	Technical	151
5.2	Recommendations	154
REFERENCES		157
APPENDIX A INSTRUMENTATION		162
A.1	Collector Identification	162
A.2	Detector Data	162
A.2.1	End-Window Counter	162
A.2.2	Beta Counter	162
A.2.3	4- π Ionization Chamber	162
A.2.4	Well Counter	163
A.2.5	20-Channel Analyzer	163
A.2.6	Doghhouse Counter	163
A.2.7	Dip Counter	164
A.2.8	Single-Channel Analyzer	164
A.2.9	Gamma Time-Intensity Recorder	164
APPENDIX B MEASUREMENTS		169
B.1	Buildup Data	169
B.2	Physical, Chemical, and Radiological Data	207
B.3	Correlations Data	269
B.4	Unreduced Data	279
FIGURES		
2.1	Aerial view of major sampling array	33
2.2	Plan and elevation of major sampling array	34
2.3	Ship and barge stations	35
2.4	Functional view of gamma time-intensity recorder (TIR)	36
2.5	Functional view of incremental collector (IC)	36

2.6	Functional view of open-close total collector (OCC) -----	37
2.7	Minor sampling array -----	37
2.8	Location map and plan drawing of Site How -----	38
2.9	Counter geometries -----	39
2.10	Station locations in the atoll area -----	40
2.11	Ship locations at times of peak activity -----	41
3.1	Rates of arrival at major stations, Shot Flathead -----	76
3.2	Rates of arrival at major stations, Shot Navajo -----	77
3.3	Rates of arrival at major stations, Shot Zuni -----	78
3.4	Rates of arrival at major stations, Shot Tewa -----	79
3.5	Calculated mass-arrival rate, Shots Zuni and Tewa -----	80
3.6	Particle-size variation at ship stations, Shot Zuni -----	81
3.7	Particle-size variation at barge and island stations, Shot Zuni -----	82
3.8	Particle-size variation at ship stations, Shot Tewa -----	83
3.9	Particle-size variation at barge and island stations, Shot Tewa -----	84
3.10	Ocean activity profiles, Shots Navajo and Tewa -----	85
3.11	Solubility of solid fallout particles -----	86
3.12	Gamma-energy spectra of sea-water-soluble activity -----	87
3.13	Typical solid fallout particles -----	88
3.14	Angular fallout particle, Shot Zuni -----	89
3.15	High magnification of part of an angular fallout particle, Shot Zuni -----	90
3.16	Spheroidal fallout particle, Shot Zuni -----	91
3.17	Angular fallout particle, Shot Tewa -----	92
3.18	Spheroidal fallout particle, Shot Tewa -----	93
3.19	Thin section and radioautograph of spherical fallout particle, Shot Inca -----	94
3.20	Energy-dependent activity ratios for altered and unaltered particles, Shot Zuni -----	95
3.21	Atoms of Np^{239} , Ba^{140} , and Sr^{90} versus atoms of Mo^{99} for altered and unaltered particles, Shot Zuni -----	96
3.22	Particle group median activity versus mean size, Shot Zuni -----	97
3.23	Particle group median activity versus mean size, Shot Tewa -----	98
3.24	Relation of particle weight to activity, Shot Tewa -----	99
3.25	Relation of particle density to activity, Shot Zuni -----	100
3.26	Gamma decay of altered and unaltered particles, Shot Zuni -----	101
3.27	Gamma spectra of altered and unaltered particles, Shot Zuni -----	102
3.28	Photomicrograph of slurry-particle reaction area and insoluble solids -----	103
3.29	Electronmicrograph of slurry-particle insoluble solids -----	103
3.30	NaCl mass versus activity per square foot, Shot Flathead -----	104
3.31	Radioautograph of slurry-particle trace and reaction area -----	104
3.32	Radionuclide fractionation of xenon, krypton, and antimony products, Shot Zuni -----	105
3.33	R-value relationships for several compositions, Shot Zuni -----	106
3.34	Photon-decay rate by doghouse counter, Shot Flathead -----	107
3.35	Photon-decay rate by doghouse counter, Shot Navajo -----	108
3.36	Photon-decay rate by doghouse counter, Shot Zuni -----	109
3.37	Photon-decay rate by doghouse counter, Shot Tewa -----	110
3.38	Beta-decay rates, Shots Flathead and Navajo -----	111
3.39	Computed ionization-decay rates, Shots Flathead, Navajo, Zuni, and Tewa -----	112
4.1	Approximate station locations and predicted fallout pattern, Shot Cherokee ----	135
4.2	Survey-meter measurement of rate of arrival on YAG 40, Shot Cherokee -----	136
4.3	Incremental collector measurement of rate of arrival on YAG 40, Shot Cherokee -----	137

4.4	Gamma-energy spectra of slurry particles, Shot Cherokee	138
4.5	Photon decay of slurry particles, Shot Cherokee	139
4.6	Predicted and observed fallout pattern, Shot Flathead	140
4.7	Predicted and observed fallout pattern, Shot Navajo	141
4.8	Predicted and observed fallout pattern, Shot Zuni	142
4.9	Predicted and observed fallout pattern, Shot Tewa	143
4.10	Close and distant particle collections, Shot Zuni	144
4.11	Cloud model for fallout prediction	145
4.12	Comparison of incremental-collector, particle-size frequency distributions, Shots Zuni and Tewa	146
4.13	Comparison of incremental-collector, mass-arrival rates and variation with particle size, Shots Zuni and Tewa	147
4.14	Comparative particle-size variation with time, YAG 39, Shot Tewa	148
4.15	Illustrative gamma-ray spectra	149
A.1	Collector designations	165
A.2	Shadowing interference in horizontal plane for TIR	166
A.3	Maximum shadowing interference in vertical plane for TIR	167
A.4	Minimum shadowing interference in vertical plane for TIR	168
B.1	Ocean-penetration rates, Shots Flathead, Navajo, and Tewa	206
B.2	Gamma decays of solid fallout particles, Shot Zuni	263
B.3	Gamma spectra of solid fallout particles, Shot Zuni	264
B.4	Gamma spectra of solid fallout particles, Shot Zuni	265
B.5	Relation of inscribed to projected particle diameter	266
B.6	Computed gamma-ionization rate above a uniformly contaminated smooth infinite plane	267
B.7	Gamma-ionization-decay rate, Site How	268
B.8	Surface-monitoring-device record, YAG 39, Shot Zuni	299
B.9	Surface-monitoring-device record, YAG 39, Shot Flathead	300
B.10	Surface-monitoring-device record, YAG 40, Shot Flathead	301
B.11	Surface-monitoring-device record, YAG 39, Shot Navajo	302
B.12	Surface-monitoring-device record, YAG 40, Shot Navajo	303
B.13	Surface-monitoring-device record, YAG 40, Shot Tewa	304
B.14	Normalized dip-counter-decay curves	305
B.15	Gamma spectra of slurry-particle insoluble solids, Shot Flathead	306
B.16	Gamma spectra of slurry-particle reaction area, Shot Flathead	307

TABLES

2.1	Shot Data	28
2.2	Station Instrumentation	29
2.3	Station Locations in the Atoll Area	30
2.4	Ship Locations at Times of Peak Activity	31
3.1	Times of Arrival, Peak Activity, and Cessation at Major Stations	61
3.2	Times of Arrival at Major and Minor Stations in the Atoll Area	61
3.3	Penetration Rates Derived from Equivalent-Depth Determinations	62
3.4	Depths at Which Penetration Ceased from Equivalent-Depth Determinations	62
3.5	Maximum Penetration Rates Observed	62
3.6	Exponent Values for Probe Decay Measurements	62
3.7	X-Ray Diffraction Analyses and Specific Activities of Individual Particles, Shot Zuni	63
3.8	Distribution of Particle Densities, Shot Zuni	63
3.9	Radiochemical Properties of Altered and Unaltered Particles, Shot Zuni	64
3.10	Activity Ratios for Particles from Shots Zuni and Tewa	64

3.11	Distribution of Activity of YAG 40 Tewa Particles with Size and Type	64
3.12	Physical, Chemical, and Radiological Properties of Slurry Particles	65
3.13	Compounds Identified in Slurry-Particle Insoluble Solids	65
3.14	Radiochemical Properties of Slurry Particles, YAG 40, Shot Flathead	65
3.15	Fissions and Fraction of Device (Mo^{99}) Per Unit Area	66
3.16	Surface Density of Fallout Components in Terms of Original Composition	67
3.17	Radiochemical Fission-Product R-Values	67
3.18	Radiochemical Actinide Product/Fission Ratios of Fallout and Standard Cloud Samples	68
3.19	Radiochemical Product/Fission Ratios of Cloud Samples and Selected Fallout Samples	68
3.20	Estimated Product/Fission Ratios by Gamma Spectrometry	69
3.21	Theoretical Corrections to Reference Fission-Product Composition, Shot Zuni	69
3.22	Computed Ionization Rate 3 Feet Above a Uniformly Contaminated Plane	70
4.1	Activity Per Unit Area for Skiff Stations, Shot Cherokee	124
4.2	Evaluation of Measurement and Data Reliability	124
4.3	Comparison of Predicted and Observed Times of Arrival and Maximum Particle-Size Variation with Time	126
4.4	Relative Bias of Standard-Platform Collections	127
4.5	Comparison of How Island Collections	128
4.6	Surface Density of Activity Deposited on the Ocean	128
4.7	Dip-Counter Conversion Factors	129
4.8	Fraction of Device per Square Foot	130
4.9	Gamma Dosage by ESL Film Dosimeter and Integrated TIR Measurements	131
4.10	Percent of Film Dosimeter Reading Recorded by TIR	132
4.11	Comparison of Theoretical Doghouse Activity of Standard-Cloud Samples by Gamma Spectrometry and Radiochemistry	132
4.12	Comparison of Activities Per Unit Area Collected by the High Volume Filter and Other Sampling Instruments	133
4.13	Normalized Ionization Rate (SC), Contamination Index, and Yield Ratio	134
B.1	Observed Ionization Rate, TIR	170
B.2	Incremental Collector Data	176
B.3	Measured Rate of Particle Deposition, Shots Zuni and Tewa	198
B.4	Calculated Rate of Mass Deposition, Shots Zuni and Tewa	200
B.5	Measured Rate of Particle Deposition, Supplementary Data, Shots Zuni and Tewa	202
B.6	Calculated Rate of Mass Deposition, Supplementary Data, Shots Zuni and Tewa	204
B.7	Counting and Radiochemical Results for Individual Particles, Shots Zuni and Tewa	208
B.8	Weight, Activity, and Fission Values for Sized Fractions from Whim Sample YFNB 29 ZU	209
B.9	Frequencies and Activity Characteristics of Particle Size and Particle Type Groups, Shots Zuni and Tewa	210
B.10	Survey of Shot Tewa Reagent Films for Slurry Particle Traces	213
B.11	Total Activity and Mass of Slurry Fallout	214
B.12	Gamma Activity and Fission Content of OCC and AOC ₁ Collectors by Mo^{99} Analysis	215
B.13	Observed Doghouse Gamma Activity-Fission Content Relationship	217
B.14	Dip-Counter Activity and Fission Content of AOC ₂ Collectors	218
B.15	Dip Probe and Doghouse-Counter Correlation with Fission Content	220

B.16	Elemental Analysis of Device Environment	221
B.17	Principal Components of Device Complex	221
B.18	Component Analysis of Fallout Samples	222
B.19	Air-Ionization Rates of Induced Products for 10^4 Fissions/Ft ² , Product/Fission Ratio of Unity (SC)	232
B.20	Absolute Photon Intensities in Millions of Photons per Second per Line for Each Sample	235
B.21	Gamma-Ray Properties of Cloud and Fallout Samples Based on Gamma-Ray Spectrometry (NRB)	237
B.22	Computed Doghouse Decay Rates of Fallout and Cloud Samples	240
B.23	Observed Doghouse Decay Rates of Fallout and Cloud Samples	251
B.24	Computed Beta-Decay Rates	254
B.25	Observed Beta-Decay Rates	257
B.26	4- π Gamma Ionization Chamber Measurements	258
B.27	Gamma Activity and Mean Fission Content of How F Buried Collectors	260
B.28	How Island Surveys, Station F	261
B.29	Sample Calculations of Particle Trajectories	270
B.30	Radiochemical Analysis of Surface Sea Water and YAG 39 Decay-Tank Samples	277
B.31	Rainfall-Collection Results	278
B.32	Activities of Water Samples	280
B.33	Integrated Activities from Probe Profile Measurements (SIO)	289
B.34	Individual Solid-Particle Data, Shots Zuni and Tewa	290
B.35	Individual Slurry-Particle Data, Shots Flathead and Navajo	294
B.36	High Volume Filter Sample Activities	296
B.37	Observed Wind Velocities Above the Standard Platforms	297

Chapter 1

INTRODUCTION

1.1 OBJECTIVES

The general objective was to collect and correlate the data needed to characterize the fallout, interpret the observed surface-radiation contours, and check the models used to make predictions, for Shots Cherokee, Zuni, Flathead, Navajo, and Tewa during Operation Redwing.

The specific objectives of the project were: (1) to determine the time of arrival, rate of arrival, and cessation of fallout, as well as the variation in particle-size distribution and gamma-radiation field intensity with time, at several points close to and distant from ground zero; (2) to collect undisturbed samples of fallout from appropriate land- and water-surface detonations for the purpose of describing certain physical properties of the particles and droplets, including their shape, size, density and associated radioactivity; measuring the activity and mass deposited per unit area; establishing the chemical and radiochemical composition of the fallout material; and determining the sizes of particles and droplets arriving at given times at several important points in the fallout area; (3) to make early-time studies of selected particles and samples in order to establish their radioactive-decay rates and gamma-energy spectra; (4) to measure the rate of penetration of activity in the ocean during fallout, the variation of activity with depth during and after fallout, and the variation of the gamma-radiation field with time a short distance above the water surface; and (5) to obtain supplementary radiation-contour data at short and intermediate distances from ground zero by total-fallout collections and time-of-arrival measurements.

It was not an objective of the project to obtain data sufficient for the determination of complete fallout contours. Instead, emphasis was placed on: (1) complete and controlled documentation of the fallout event at certain key points throughout the pattern, also intended to serve as correlation points with the surveys of other projects; (2) precise measurements of time-dependent phenomena, which could be utilized to establish which of the conflicting assumptions of various fallout prediction theories were correct; (3) analysis of the fallout material for the primary purpose of obtaining a better understanding of the contaminant produced by water-surface detonations; and (4) gross documentation of the fallout at a large number of points in and near the lagoon.

1.2 BACKGROUND

A few collections of fallout from tower shots were made in open pans during Operation Greenhouse (Reference 1). More extensive measurements were made for the surface and underground shots of Operation Jangle (Reference 2). Specialized collectors were designed to sample incrementally with time and to exclude extraneous material by sampling only during the fallout period. The studies during Operation Jangle indicated that fallout could be of military importance in areas beyond the zones of severe blast and thermal damage (Reference 3).

During Operation Ivy, a limited effort was made to determine the important fallout areas for a device of megaton yield (Reference 4). Because of operational difficulties, no information on

fallout in the downwind direction was obtained. Contours were established in the upwind and crosswind directions by collections on raft stations located in the lagoon.

Elaborate plans to measure the fallout in all directions around the shot point were made for Operation Castle (Reference 5). These plans involved the use of collectors mounted on free-floating buoys placed in four concentric circles around the shot point shortly before detonation. Raft stations were also used in the lagoon and land stations were located on a number of the islands. Because of poor predictability of detonation times and operational difficulties caused by high seas, only fragmentary data was obtained from these stations.

The measurement of activity levels on several neighboring atolls that were unexpectedly contaminated by debris from Shot 1 of Operation Castle provided the most useful data concerning the magnitude of the fallout areas from multimegaton weapons (Reference 6). Later in the operation, aerial and oceanographic surveys of the ocean areas were conducted and water samples were collected (References 7 and 8). These measurements, made with crude equipment constructed in the forward area, were used to calculate approximate fallout contours. The aerial-survey data and the activity levels of the water samples served to check the contours derived from the oceanographic survey for Shot 5. No oceanographic survey was made on Shot 6; however, the contours for this shot were constructed from aerial-survey and water-sample data.

In spite of the uncertainty of the contours calculated for these shots, the possibility of determining the relative concentration of radioactivity in the ocean following a water-surface detonation was demonstrated. During Operation Wigwam (Reference 9), the aerial and oceanographic survey methods were again successfully tested.

During Operation Castle, the question arose of just how efficiently the fallout was sampled by the instruments used on that and previous operations. Studies were made at Operation Teapot (Reference 10) to estimate this efficiency for various types of collectors located at different heights above the ground. The results demonstrated the difficulties of obtaining reliable samples and defined certain factors affecting collector efficiency. These factors were then applied in the design of the collectors and stations for Operation Redwing.

1.3 THEORY

1.3.1 General Requirements. Estimates of the area contaminated by Shot 1 during Operation Castle indicated that several thousand square miles had received significant levels of fallout (References 5, 11 and 12), but these estimates were based on very-meager data. It was considered essential, therefore, to achieve adequate documentation during Operation Redwing. Participation in a joint program designed to obtain the necessary data (Reference 13) was one of the responsibilities of this project.

The program included aerial and oceanographic surveys, as well as lagoon and island surveys, whose mission was to make surface-radiation readings over large areas and collect surface-water samples (References 14, 15 and 16). Such readings and samples cannot be used directly, however, to provide a description of the contaminated material or radiation-contour values. Corrections must be made for the characteristics of the radiation and the settling and dissolving of the fallout in the ocean. It was these corrections which were of primary interest to this project.

1.3.2 Data Requirements. Regardless of whether deposition occurs on a land or water surface, much the same basic information is required for fallout characterization, contour construction, and model evaluation, specifically: (1) fallout buildup data, including time of arrival, rate of arrival, time of cessation, and particle-size variation with time; (2) fallout composition data, including the physical characteristics, chemical components, fission content, and radionuclide composition of representative particles and samples; (3) fallout radiation data, including photon emission rate and ionizing power as a function of time; and (4) total fallout data, including the number of fissions and amount of mass deposited per unit area, as well as the total gamma-ionization dose delivered to some late time.

1.3.3 Special Problems and Solutions. Models can be checked most readily by means of fallout-buildup data, because this depends only on the aerodynamic properties of the particles, their initial distribution in the cloud, and intervening meteorological conditions. The construction of land-equivalent radiation contours, on the other hand, requires characterization of the composition and radiations of the fallout in addition to information on the total amount deposited.

1.3.4 Radionuclide Composition and Radiation Characteristics. In the present case, for example, exploratory attempts to resolve beta-decay curves into major components failed, because at the latest times measured, the gross activity was generally still not decaying in accordance with the computed fission-product disintegration rate. It was known that, at certain times, induced activities in the actinides alone could upset the decay constant attributed to fission products, and that the salting agents present in some of the devices could be expected to influence the gross decay rate to a greater or lesser extent depending on the amounts, half lives, and decay schemes of the activated products. The extent to which the properties of the actual fission products resembled those of thermally fissioned U^{235} and fast fission of U^{238} was not known, nor were the effects of radionuclide fractionation. In order to establish the photon-emission characteristics of the source, a reliable method of calculating the gamma-ray properties of a defined quantity and distribution of nuclear-detonation products had to be developed. Without such information, measurements of gamma-ionization rate and sample activity, made at a variety of times, could not be compared, nor the results applied in biological-hazard studies.

Fission-product, induced-product, and fractionation corrections can be made on the basis of radiochemical analyses of samples for important nuclides. This leads to an average radionuclide composition from which the emission rate and energy distribution of gamma photons can be computed for various times. A photon-decay curve can then be prepared for any counter with known response characteristics and, by calculating ionization rates at the same times, a corresponding ionization-decay curve. These curves can in turn be compared with experimental curves to check the basic composition and used to reduce counter and survey-meter readings.

1.3.5 Sampling Bias. Because the presence of the collection system itself usually distorts the local air stream, corrections for sample bias are also required before the total fallout deposited at a point may be determined. To make such corrections, the sampling arrays at all stations must be geometrically identical, so that their collections may be compared when corrected for wind velocity, and an independent and absolute measure of the total fallout deposited at one or more of the stations must be obtained. The latter is often difficult, if not impossible, to do and for this reason it is desirable to express radiological effects, such as dose rate, in terms of a reference fission density. Insertion of the best estimate of the actual fission density then leads to the computed infinite-plane ionization rate for that case.

In principle, on the deck of a ship large enough to simulate an infinite plane, the same fallout-radiation measurements can be made as on a land mass. In actual fact, however, there are important differences: an additional deposition bias exists because of the distortion of the airflow around the ship; the collecting surfaces on the ship are less retentive than a land plane, and their geometric configuration is different; a partial washdown must be used if the ship is manned, and this requires headway into the surface wind in order to maintain position and avoid sample contamination in the unwashed area. For these reasons, the bias problem is even more severe aboard ship than on land.

The preceding considerations were applied in the development of the present experiment and will be reflected in the treatment of the data. All major sampling stations were constructed alike and included an instrument for measuring wind velocity. The buried-tray array surrounding the major station on Site How was intended to provide one calibration point, and it was hoped that another could be derived from the water-sampling measurements. In the analysis which follows, fractionation corrections will be made and radiological quantities expressed in terms of 10^4 fissions wherever possible. Relative-bias corrections will be included for each major station, and an attempt will also be made to assess absolute bias for these stations.

1.3.6 Overall Approach. It should be emphasized that, at the time this project was conceived, the need for controlled and correlated sets of fallout data for megaton bursts was critical. Because of the lack of experimental criteria, theoretical concepts could be neither proved nor disproved, and progress was blocked by disagreements over fundamental parameters. The distribution of particle sizes and radioactivity within the source cloud, the meteorological factors which determined the behavior of the particles falling through the atmosphere, the relationship of activity to particle size, and the decay and spectral characteristics of the fallout radiations: all were in doubt. Even the physical and chemical nature of the particulate from water-surface bursts was problematical, and all existing model theory was based on land-surface detonations. Corrections necessitated by collection bias and radionuclide fractionation were considered refinements.

The objectives stated in Section 1.1 were formulated primarily to provide such sets of data. However, the need to generalize the results so that they could be applied to other combinations of detonation conditions was also recognized, and it was felt that studies relating to basic radiological variables should receive particular emphasis. Only when it becomes possible to solve new situations by inserting the proper values of such detonation parameters as the yield of the device and the composition of environmental materials in generalized mathematical relationships will it become possible to truly predict fallout and combat its effects.

Chapter 2

PROCEDURE

2.1 SHOT PARTICIPATION

This project participated in Shots Cherokee, Zuni, Flathead, Navajo and Tewa. Shot data is given in Table 2.1.

2.2 INSTRUMENTATION

The instrumentation featured standardized arrays of sampling instruments located at a variety of stations and similar sets of counting equipment located in several different laboratories. Barge, raft, island, skiff, and ship stations were used, and all instruments were designed to document fallout from air, land, or water bursts.

The standardized arrays were of two general types: major and minor. The overall purpose of both was to establish a basis for relative measurements. Major arrays were located on the ships, barges, and Site How; minor arrays were located on the rafts, skiffs, and Sites How, George, William, and Charlie. All major array collectors are identified by letter and number in Section A.1, Appendix A.

Special sampling facilities were provided on two ships and Site How.

The instrument arrays located at each station are listed in Table 2.2.

2.2.1 Major Sampling Array. The platforms which supported the major arrays were 15 or 20 feet in diameter and 3 feet 8 inches deep. Horizontal windshields were used to create uniform airflow conditions over the surfaces of the collecting instruments (Figures 2.1 and 2.2). All platforms were mounted on towers or king posts of ships to elevate them into the free air stream (Figure 2.3).

Each array included one gamma time-intensity recorder (TIR), one to three incremental collectors (IC), four open-close total collectors (OCC), two always-open total collectors, Type 1 (AOC₁), one recording anemometer (RA), and one trigger-control unit (Mark I or Mark II).

The TIR, an autorecyclic gamma ionization dosimeter, is shown disassembled in Figure 2.4. It consisted of several similar units each of which contained an ionization chamber, an integrating range capacitor, associated electrometer and recyclic relay circuitry, and a power amplifier, fed to a 20-pen Esterline-Angus operational recorder. Information was stored as a line pulse on a moving paper tape, each line corresponding to the basic unit of absorbed radiation for that channel. In operation, the integrating capacitor in parallel with the ionization chamber was charged negatively. In a radiation field, the voltage across this capacitor became more positive with ionization until a point was reached where the electrometer circuit was no longer nonconducting. The resultant current flow tripped the power amplifier which energized a recycling relay, actuated the recorder, and recharged the chamber to its original voltage. Approximately $\frac{1}{4}$ inch of polyethylene was used to exclude beta rays, such that increments of gamma ionization dose from 1 mr to 10 r were recorded with respect to time. Dose rate could then be obtained from the spacing of increments, and total dose from the number of increments. This instrument provided data on the time of arrival, rate of arrival, peak and cessation of fallout, and decay of the radiation field.

The IC, shown with the side covers removed in Figure 2.5, contained 55 to 60 trays with sensitive collecting surfaces 3.2 inch in diameter. The trays were carried to exposure position by a pair of interconnected gravity-spring-operated vertical elevators. Each tray was exposed

at the top of the ascending elevator for an equal increment of time, varying from 2 to 15 minutes for different instruments; after exposure it was pushed horizontally across to the descending elevator by means of a pneumatic piston. For land-surface shots, grease-coated cellulose acetate disks were used as collecting surfaces; for water-surface shots these were interspersed with disks carrying chloride-sensitive films. This instrument also furnished data on the time of arrival, rate of arrival, peak and cessation of fallout and, in addition, provided samples for measurements of single-particle properties, particle-size distribution, and radiation characteristics.

The OCC, shown with the top cover removed in Figure 2.6, contained a square aluminum tray about 2 inches deep and 2.60 square feet in area. Each tray was lined with a thin sheet of polyethylene to facilitate sample removal and filled with a fiberglass honeycomb insert to improve collection and retention efficiency without hindering subsequent analyses. The collector was equipped with a sliding lid, to prevent samples from being altered by environmental conditions before or after collection, and designed in such a way that the top of the collecting tray was raised about $\frac{1}{2}$ inch above the top of the instrument when the lid was opened. Upon recovery, each tray was sealed with a separate aluminum cover $\frac{1}{4}$ inch thick which was left in place until the time of laboratory analysis. The samples collected by this instrument were used for chemical and radiochemical measurements of total fallout and for determinations of activity deposited per unit area.

The AOC₁ was an OCC tray assembly which was continuously exposed from the time of placement until recovery. It was provided as a backup for the OCC, and the samples were intended to serve the same purposes.

The RA was a stock instrument (AN/UMQ-5B, RD108/UMQ-5) capable of recording wind speed and direction as a function of time.

The Mark I and II trigger-control units were central panels designed to control the operation of the instruments in the major sampling array. The Mark I utilized ship power and provided for manual control of OCC's and automatic control of IC's. The Mark II had its own power and was completely automatic. A manually operated direct-circuit trigger was used for the ship installations and a combination of radio, light, pressure and radiation triggers was used on the barges and Site How.

In addition to the instruments described above, an experimental high-volume filter unit (HVF), or incremental air sampler, was located on each of the ship platforms. It consisted of eight heads, each with a separate closure, and a single blower. The heads contained dimethylterephthalate (DMT) filters, 3 inches in diameter, and were oriented vertically upward. Air was drawn through them at the rate of about 10 cubic feet per minute as they were opened sequentially through the control unit. The instrument was designed to obtain gross aerosol samples under conditions of low concentration and permit the recovery of particles without alteration resulting from sublimation of the DMT.

Sets of instruments consisting of one incremental and one total-fallout collector belonging to Project 2.65 and one gamma dose recorder belonging to Project 2.2 were also placed on the ship platforms and either on or near the barge and Site How platforms. These were provided to make eventual cross-correlation of data possible.

2.2.2 Minor Sampling Array. The minor array (Figure 2.7) was mounted in two ways. On the skiffs, a telescoping mast and the space within the skiff were used for the instruments. On the rafts and islands, a portable structure served both as a tower and shield against blast and thermal effects. However, all arrays included the same instruments: one time-of-arrival detector (TOAD), one film-pack dosimeter (ESL), and one always-open total collector, Type 2 (AOC₂).

The TOAD consisted of an ionization-chamber radiation trigger and an 8-day chronometric clock started by the trigger. With this instrument, the time of arrival was determined by subtracting the clock reading from the total period elapsed between detonation and the time when the instrument was read.

The ESL was a standard Evans Signal Laboratory film pack used to estimate the gross gam-

ma ionization dose.

The AOC₂ consisted of a 7-inch-diameter funnel, a 1/2-inch-diameter tube, and a 2-gallon bottle, all of polyethylene, with a thin layer of fiberglass honeycomb in the mouth of the funnel. Collected samples were used to determine the activity deposited per unit area.

2.2.3 Special Sampling Facilities. The YAG 40 carried a shielded laboratory (Figure 2.3), which could commence studies shortly after the arrival of the fallout. This laboratory was independently served by the special incremental collector (SIC) and an Esterline-Angus recorder which continuously recorded the radiation field measured by TIR's located on the king-post platform and main deck.

The SIC consisted of two modified IC's, located side by side and capable of being operated independently. Upon completion of whatever sampling period was desired, trays from either instrument could be lowered directly into the laboratory by means of an enclosed elevator. Both the trays and their collecting surfaces were identical to those employed in the unmodified IC's. The samples were used first for early-time studies, which featured work on single particles and gamma decay and measurements of energy spectra. Later, the samples were used for detailed physical, chemical, and radiochemical analyses.

Both the YAG 39 and YAG 40 carried water-sampling equipment (Figure 2.3). The YAG 39 was equipped with a penetration probe, a decay tank with probe, a surface-monitoring device, and surface-sampling equipment. The YAG 40 was similarly equipped except that it had no decay tank with probe.

The penetration probe (SIO-P), which was furnished by Project 2.62a, contained a multiple GM tube sensing element and a depth gage. It was supported on an outrigger projecting about 25 feet over the side of the ship at the bow and was raised and lowered by a winch operated from the secondary control room. Its output was automatically recorded on an X-Y recorder located in the same room. The instrument was used during and after fallout to obtain successive vertical profiles of apparent milliroentgens per hour versus depth.

The tank containing the decay probe (SIO-D) was located on the main deck of the YAG 39 and was, in effect, a large always-open total collector with a windshield similar to that on the standard platform secured to its upper edge. It was approximately 6 feet in diameter and 6 3/4 feet deep. The probe was identical to the SIO-P described above. Except in the case of Shot Zuni, the sea water with which it was filled afresh before each event, was treated with nitric acid to retard plating out of the radioactivity and stirred continuously by a rotor located at the bottom of the tank.

The surface-monitoring device (NYO-M), which was provided by Project 2.64, contained a plastic phosphor and photomultiplier sensing element. The instrument was mounted in a fixed position at the end of the bow outrigger and its output was recorded automatically on an Esterline-Angus recorder located in the secondary control room of the ship. During fallout, it was protected by a polyethylene bag. This was later removed while the device was operating. The purpose of the device was to estimate the contribution of surface contamination to the total reading. The instrument was essentially unshielded, exhibiting a nonuniform 4- π response. It was intended to measure the changing gamma-radiation field close above the surface of the ocean for purposes of correlation with readings of similar instruments carried by the survey aircraft.

The surface-sampling equipment consisted of a 5-gallon polyethylene bucket with a hand line and a number of 1/2-gallon polyethylene bottles. This equipment was used to collect water samples after the cessation of fallout.

A supplementary sampling facility was established on Site How near the tower of the major sampling array (Figure 2.8). It consisted of twelve AOC₁'s without liners or inserts (AOC₁-B), each with an adjacent survey stake, 3 feet high. The trays were filled with earth and buried in such a way that their collecting surfaces were flush with the ground. Every location marked with a stake was monitored with a hand survey meter at about 1-day intervals for 5 or 6 days after each event. Samples from the trays were used in assessing the collection bias of the major sampling array by providing an absolute value of the number of fissions deposited per unit area.

The survey-meter readings were used to establish the gamma-ionization decay above a surface approximating a uniformly contaminated infinite plane.

2.2.4 Laboratory Facilities. Samples were measured and analyzed in the shielded laboratory aboard the YAG 40, the field laboratory at Site Elmer and the U. S. Naval Radiological Defense Laboratory (NRDL). The laboratories in the forward area were equipped primarily for making early-time measurements of sample radioactivity, all other measurements and analyses being performed at NRDL. Instruments used in determining the radiation characteristics of samples are discussed briefly below and shown in Figure 2.9; pertinent details are given in Section A.2, Appendix A. Other special laboratory equipment used during the course of sample studies consisted of an emission spectrometer, X-ray diffraction apparatus, electron microscope, ion-exchange columns, polarograph, flame photometer, and Galvanek-Morrison fluorimeter.

The YAG 40 laboratory was used primarily to make early-gamma and beta-activity measurements of fallout samples from the SIC trays. All trays were counted in an end-window gamma counter as soon as they were removed from the elevator; decay curves obtained from a few of these served for corrections to a common time. Certain trays were examined under a wide-field stereomicroscope, and selected particles were sized and removed with a hypodermic needle thrust through a cork. Other trays were rinsed with acid and the resulting stock solutions used as correlation and decay samples in the end-window counter, a beta proportional counter, a $4-\pi$ gamma ionization chamber and a gamma well counter. Each particle removed was stored on its needle in a small glass vial and counted in the well counter. Occasional particles too active for this counter were assayed in a special holder in the end-window counter, and a few were dissolved and treated as stock solutions. Gamma-ray pulse-height spectra were obtained from a selection of the described samples using a 20-channel gamma analyzer. Sturdy-energy calibration and reference-counting standards were prepared at NRDL and used continuously with each instrument throughout the operation.

The end-window counter (Figure 2.9A) consisted of a scintillation detection unit mounted in the top portion of a cylindrical lead shield $1\frac{1}{2}$ inch thick, and connected to a preamplifier, amplifier and scaler unit (Section A.2). The detection unit contained a $1\frac{1}{2}$ -inch-diameter-by- $\frac{1}{2}$ -inch-thick NaI(Tl) crystal fitted to a photomultiplier tube. A $\frac{1}{4}$ -inch-thick aluminum beta absorber was located between the crystal and the counting chamber, and a movable-shelf arrangement was utilized to achieve known geometries.

The beta counter (Figure 2.9B) was of the proportional, continuous-flow type consisting of a gas-filled chamber with an aluminum window mounted in a $1\frac{1}{2}$ -inch-thick cylindrical lead shield (Section A.2). A mixture of 90-percent argon and 10-percent CO₂ was used. The detection unit was mounted in the top part of the shield with a 1-inch circular section of the chamber window exposed toward the sample, and connected through a preamplifier and amplifier to a conventional scaler. A movable-shelf arrangement similar to the one described for the end-window counter was used in the counting chamber. Samples were mounted on a thin plastic film stretched across an opening in an aluminum frame.

The $4-\pi$ gamma ionization chamber (GIC) consisted of a large, cylindrical steel chamber with a plastic-lined steel thimble extending into it from the top (Figure 2.9C). The thimble was surrounded by a tungsten-wire collecting grid which acted as the negative electrode, while the chamber itself served as the positive electrode. This assembly was shielded with approximately 4 inches of lead and connected externally to variable resistors and a vibrating reed electrometer, which was coupled in turn to a Brown recorder (Section A.2). Measurements were recorded in millivolts, together with corresponding resistance data from the selection of one of four possible scales, and reported in milliamperes of ionization current. Samples were placed in lusteroid tubes and lowered into the thimble for measurement.

The gamma well counter (Figure 2.9D) consisted of a scintillation detection unit with a hollowed-out crystal, mounted in a cylindrical lead shield $1\frac{1}{2}$ inches thick, and connected through a preamplifier to a scaler system (Section A.2). The detection unit contained a $1\frac{3}{4}$ -inch-diameter-by-2-inch-thick NaI(Tl) crystal, with a $\frac{3}{4}$ -inch-diameter-by- $1\frac{1}{2}$ -inch well, joined to a phototube. Samples were lowered into the well through a circular opening in the top of the shield.

The 20-channel analyzer (Figure 2.9E) consisted of a scintillation detection unit, an amplification system and a multichannel pulse-height analyzer of the differential-discriminator type, using glow transfer tubes and fast registers for data storage. Two basic 10-channel units were operated together from a common control panel to make up the 20 channels. Slit amplifiers for both units furnished the basic amplitude-recognition function and established an amplitude sensitivity for each channel. The detection unit consisted of a 2-inch-diameter-by-2-inch-thick NaI(Tl) crystal encased in $\frac{1}{2}$ inch of polyethylene and joined to a photomultiplier tube. This unit was mounted in the top part of a cylindrical lead shield approximately 2 inches thick. A movable-shelf arrangement, similar to that described for the end-window counter, was used to achieve known geometries in the counting chamber, and a collimating opening $\frac{1}{2}$ inch in diameter in the base of the shield was used for the more active samples.

The laboratory on Site Elmer was used to gamma-count all IC trays and follow the gamma ionization and beta decay of selected samples. All of the instruments described for the YAG 40 laboratory were duplicated in a dehumidified room in the compound at this site, except for the well counter and 20-channel analyzer, and these were sometimes utilized when the ship was anchored at Eniwetok. Permanent standards prepared at NRDL were used with each instrument. Operations such as sample dissolving and aliquoting were performed in a chemical laboratory trailer located near the counting room. Rough monitoring of OCC and AOC samples was also accomplished in a nearby facility (Figure 2.9F); this consisted of a wooden transportainer containing a vertically adjustable rack for a survey meter and a fixed lead pad for sample placement.

Laboratory facilities at NRDL were used for the gamma-counting of all OCC and AOC samples, continuing decay and energy-spectra measurements on aliquots of these and other samples, and all physical, chemical, and radiochemical studies except the single-particle work performed in the YAG 40 laboratory. Each type of instrument in the field laboratories, including the monitoring facility on Site Elmer, also existed at NRDL and, in addition, the instruments described below were used. Permanent calibration standards were utilized in every case, and different kinds of counters were correlated with the aid of various mononuclide standards, U^{235} slow-neutron fission products, and actual cloud and fallout samples. All counters of a given type were also normalized to a sensibly uniform response by means of reference standards.

The doghouse counter (Figure 2.9G) was essentially an end-window scintillation counter with a counting chamber large enough to take a complete OCC tray. It consisted of a detection unit containing a 1-inch-diameter-by-1-inch-thick NaI(Tl) crystal and a phototube, which was shielded with $1\frac{1}{2}$ inches of lead and mounted over a 7-inch-diameter hole in the roof of the counting chamber. The chamber was composed of a $\frac{3}{4}$ -inch-thick plywood shell surrounded by a 2-inch-thick lead shield with a power-operated vertical sliding door. The detector was connected through a preamplifier and amplifier to a special scaler unit designed for high counting rates. Sample trays were decontaminated and placed in a fixed position on the floor of the chamber. All trays were counted with their $\frac{1}{4}$ -inch-thick aluminum covers in place. This instrument was used for basic gamma measurements of cloud samples and OCC, AOC₁, and AOC₁-B trays.

The dip counter (Figure 2.9H) consisted of a scintillation-detection unit mounted on a long, metal pipe inserted through a hole in the roof of the doghouse counter and connected to the same amplifier and scaler system. The detection unit consisted of a $1\frac{1}{2}$ -inch-diameter-by- $\frac{1}{2}$ -inch-thick NaI(Tl) crystal, a photomultiplier tube, and a preamplifier sealed in an aluminum case. This probe was positioned for counting by lowering it to a fixed level, where it was suspended by means of a flange on the pipe. A new polyethylene bag was used to protect the probe from contamination during each measurement. The sample solution was placed in a polyethylene container that could be raised and lowered on an adjustable platform to achieve a constant probe depth. A magnetic stirrer was utilized to keep the solution thoroughly mixed, and all measurements were made with a constant sample volume of 2,000 ml. The instrument was used for gamma measurements of all AOC₂ and water samples, as well as aliquots of OCC samples of known fission content.

The single-channel analyzer (Figure 2.9I) consisted of a scintillation-detection unit, an amplification system, a pulse-height analyzer, and an X-Y plotter. After amplification, pulses from the detection unit were fed into the pulse-height analyzer. The base line of the analyzer

was swept slowly across the pulse spectrum and the output simultaneously fed into a count-rate meter. Count rate was recorded on the Y-axis of the plotter, and the analyzer base-line position on the X-axis, giving a record reducible to gamma intensity versus energy. The detection unit consisted of a 4-inch-diameter-by-4-inch-thick NaI(Tl) crystal, optically coupled to a photomultiplier tube and housed in a lead shield 2½ inch thick on the sides and bottom. A 6-inch-thick lead plug with a ½-inch-diameter collimating opening was located on top, with the collimator directed toward the center of the crystal. The sample was placed in a glass vial and suspended in a fixed position a short distance above the collimator. All quantitative gamma-energy-spectra measurements of cloud and fallout samples were made with this instrument.

Relative spectral data was also obtained at later times with a single-channel analyzer. This instrument utilized a detection unit with a 3-inch-diameter-by-3-inch-thick uncollimated NaI(Tl) crystal. Reproducible geometries were neither required nor obtained; energy calibration was accomplished with convenient known standards.

2.3 STATION LOCATIONS

2.3.1 Barges, Rafts, Islands, and Skiffs. The approximate locations of all project stations in the atoll area are shown for each shot in Figure 2.10; more exact locations are tabulated in Table 2.3. The Rafts 1, 2, and 3, the island stations on Sites George and How, and the Skiffs DD, EE, KK, LL, and TT remained in the same locations during the entire operation. Other stations changed position at least once and sometimes for each shot. These changes are indicated on the map by the letters for the shots during which the given position applies; the table, however, gives the exact locations. All stations were secured and protected from fallout during Shot Dakota in which this project did not participate.

The choice of locations for the barges was conditioned by the availability of cleared anchoring sites, the necessity of avoiding serious blast damage, and the fact that the YFNB 29 carried two major sampling arrays while the YFNB 13 carried only one. Within these limitations they were arranged to sample the heaviest fallout predicted for the lagoon area and yet guard against late changes in wind direction. In general, the YFNB 29 was located near Site How for all shots except Tewa, when it was anchored off Site Bravo. The YFNB 13 was located near Site Charlie for all shots except Cherokee and Tewa, when it was positioned near Site How. Because both barges were observed to oscillate slowly almost completely around their points of anchorage, an uncertainty of ±200 yards must be associated with the locations given in Table 2.3.

The raft positions were chosen for much the same reasons as for the barge positions, but also to improve the spacing of data points in the lagoon. An uncertainty of ±150 yards should be associated with these anchorage coordinates.

The island stations, except for Site How, were selected on the basis of predicted heavy fallout. It was for this reason that the minor sampling array (M) located at Site William for Shots Cherokee, Zuni, and Flathead was moved to Site Charlie for Shots Navajo and Tewa. Site How was selected to be in a region of moderate fallout so that survey and recovery teams could enter at early times. A detailed layout of the installation on Site How is shown in Figure 2.8.

Because the skiffs were deep anchored and could not be easily moved (Reference 15), their locations were originally selected to provide roughly uniform coverage of the most probable fallout sector. With the exception of Stations WW, XX, and YY— assembled from components recovered from other stations and placed late in the operation—their positions were not deliberately changed. Instead, the different locations shown in Figure 2.10 reflect the fact that the skiffs sometimes moved their anchorages and sometimes broke loose entirely and were temporarily lost. Loran fixes were taken during arming and recovery, before and after each shot. The locations given in Table 2.3 were derived from the fixes and represent the best estimate of the positions of the skiffs during fallout, for an average deviation of ±1,000 yards in each coordinate.

2.3.2 Ships. The approximate locations of the three project ships at the times when they experienced peak ionization rates during each shot are presented in Figure 2.11. Table 2.4 gives

these locations more precisely and also lists a number of other successive positions occupied by each ship between the times of arrival and cessation of fallout.

From the tabulated data, the approximate courses of the ships during their sampling intervals may be reconstructed. The given coordinates represent Loran fixes, however, and cannot be considered accurate to better than ± 500 yards. Further, the ships did not always proceed from one point to another with constant velocity, and an uncertainty of $\pm 1,000$ yards should be applied to any intermediate position calculated by assuming uniform motion in a straight line between points.

The ships were directed to the initial positions listed in Table 2.4 by messages from the Program 2 Control Center (see Section 2.4.1); but once fallout began to arrive, each ship performed a fixed maneuver which led to the remaining positions. This maneuver, which for Shots Cherokee and Zuni consisted of moving into the surface wind at the minimum speed (< 3 knots) necessary to maintain headway, was a compromise between several requirements: the desirability of remaining in the same location with respect to the surface of the earth during the fallout-collection period, and yet avoiding nonuniform sampling conditions; the importance of preventing sample contamination by washdown water—particularly on the forward part of the YAG 40 where the SIC was located; and the necessity of keeping the oceanographic probe (SIO-P) away from the ship. It was found, however, that the ships tended to depart too far from their initial locations when surface winds were light; and this maneuver was modified for the remaining shots to include a figure eight with its long axis (< 2 nautical miles) normal to the wind, should a distance of 10 nautical miles be exceeded.

The YAG 40 and LST 611 ordinarily left their sampling sites soon after the cessation of fallout and returned to Eniwetok by the shortest route. The YAG 39, on the other hand, after being relieved long enough to unload samples at Bikini to the vessel, Horizon (Scripps Institution of Oceanography), remained in position for an additional day to conduct water-sampling operations before returning to Eniwetok.

2.4 OPERATIONS

2.4.1 Logistic. Overall project operations were divided into several parts with one or more teams and a separate director assigned to each. Both between shots and during the critical D-3 to D+3 period, the teams functioned as the basic organizational units. In general, instrument maintenance was accomplished during the interim periods, instrument arming between D-3 and D-1, and sample recovery and processing from D-day to D+3.

Control-center operations took place in the Program 2 Control Center aboard the command ship, USS Estes. This team, which consisted of three persons headed by the project officer, constructed probable fallout patterns based on meteorological information obtained from Task Force 7 and made successive corrections to the patterns as later information became available. The team also directed the movements of the project ships and performed the calculations required to reduce and interpret early data communicated from them.

Ship operations featured the use of the YAG 40, YAG 39, and LST 611 as sampling stations. These ships were positioned in the predicted fallout zone before the arrival of fallout and remained there until after its cessation. Each ship was manned by a minimum crew and carried one project team of three or four members who readied the major array instruments, operated them during fallout, and recovered and packed the collected samples for unloading at the sample-distribution center on Site Elmer. Water sampling, however, was accomplished by separate two-man teams aboard the YAG's, and early-sample measurements were performed by a team of six persons in the YAG 40 laboratory.

Bikini operations included the maintenance, arming, and recovery of samples from all project stations in the atoll area. Because every station had to operate automatically during fallout and samples had to be recovered at relatively early times, three teams of four or five men each were required. The barge team was responsible for the major sampling arrays on the YFNB 13, YFNB 29, and Site How, as well as for the special sampling facility located on the latter. The raft team was responsible for the minor sampling arrays on the rafts and atoll islands, and the

skiff team for those on the skiffs, all of which were anchored outside of the lagoon. The samples collected by these teams were returned to the sample-recovery center on Site Nan and processed there for shipment to the sample-distribution center on Site Elmer.

Laboratory operations were conducted on the YAG 40 and on Site Elmer. One six-man team worked on the YAG 40 during fallout, making the measurements of the SIC tray samples described in Section 2.2.3, while a second three-man team remained on Site Elmer to make the measurements of the IC trays as soon as they arrived. Decay measurements and other studies begun on the ship were sometimes continued by the same persons on Site Elmer and later at NRDL.

Eniwetok operations consisted of the administrative activities of the project headquarters office located there, and the sample-processing activities of the sample-distribution center. All samples collected by ship, laboratory, and Bikini operations were recorded, decontaminated, monitored, packed, and placed on one of two early flights to NRDL by the four-man team assigned to this center.

Thus, all samples were collected either aboard the project ships or by one of the Bikini stations; all, however, were routed through the sample-distribution center on Site Elmer before being shipped to NRDL. Charts removed from recorders and records of field-instrument readings were also processed through the center. Only SIC and IC trays were used for field-laboratory measurements, all others being counted and analyzed at NRDL.

2.4.2 Technical. Fallout information was required in three broad categories: buildup characteristics, including all time-dependent data associated with fallout arrival; physical, chemical, and radiochemical characteristics, including both single particles and total samples; and radionuclide composition and radiation characteristics, including fractionation and gamma ionization decay. The operational procedures discussed in the preceding paragraphs, as well as the instrumentation described in Section 2.2, were designed around these requirements.

The rate of fallout arrival and most other buildup characteristics were determined from TIR records and measurements of IC and SIC trays. Consequently, this information was obtained at all major-sampling-array locations and several additional places aboard the project ships. Time of arrival, however, was determined at all stations; wherever major arrays were located, it was derived from the TIR's and IC's, while the TOAD's supplied it for the minor arrays. The way in which particle-size distributions changed with time was determined by sizing and counting IC tray collections, and mass-arrival rates were calculated from the same data. Ocean-penetration rates were derived from the probe (SIO-P) measurements made on the YAG 39 and YAG 40. Periodic TIR readings from the ships and selected SIC tray data were also reported to the control center during each shot and used for preliminary fallout analyses.

The majority of single-particle studies were performed on particles collected by the SIC on the YAG 40, although particles from IC and OCC trays, as well as two unscheduled samples from the YFNB 29, were also used. The sizes and gamma activities of all particles were measured, diameter being defined and used as an index of size for solid particles and NaCl content for slurry particles. Solid particles were also classified as to type and used for a number of special studies, including decay and gamma-energy-spectra measurements and radiochemical analyses.

The total amount of fallout, and all other properties requiring a total collection, were determined from OCC and AOC samples. As indicated in Section 2.2.4, all OCC and AOC₁ trays, as well as all AOC₂ bottles after the material in the funnel and tube had been washed into them with a dilute acid, were shipped directly to NRDL and gamma-counted. Following this, OCC tray samples from each station were removed and analyzed for their chemical and radiochemical compositions, so that the surface densities of various fallout components and the total amount of activity deposited per unit area could be calculated.

Aliquots were withdrawn from the OCC-sample solutions at NRDL and measured in the 4- π ionization chamber along with aliquots of AOC₂ and sea-water samples in order to relate the different kinds of gamma measurements. Other aliquots and undissolved fractions of the original sample were used for gamma spectra and beta- and gamma-decay measurements, with gamma decay being followed both on crystal counters and in the 4- π ionization chamber. Samples

collected on selected trays from the SIC were also dissolved in the YAG 40 laboratory and aliquots of the resulting solution used for similar purposes. Information obtained in these ways, when combined with radiochemical results, provided a basis for establishing an average radionuclide composition from which air-ionization rates could be calculated.

Measurement of the actual air-ionization rate above a simulated infinite plane was made on Site How. In addition to the record obtained by the TIR, periodic ionization-rate readings were made with a hand survey meter held 3 feet above the ground at each of the buried-tray (AOC₁-B) locations. The number of fissions collected in these trays served both to calibrate the collections made by the major array on the tower and to establish experimental values of the ratio of roentgens per hour to fissions per square foot. Fission concentrations in a number of surface-water samples collected from the YAG 39 and YAG 40 were also determined for use in conjunction with the average depth of penetration, to arrive at an independent estimate of the total amount of fallout deposited at these locations.

It was intended to calibrate one of the oceanographic probes (SIO-D) directly by recording its response to the total fallout deposited in the tank aboard the YAG 39, and subsequently measuring the activities of water samples from the tank. Because it malfunctioned, the probe could not be calibrated in this way, but the samples were taken and fission concentrations estimated for each shot. Records were also obtained from the surface-monitoring devices (NYO-M) on the YAG 39 and YAG 40. These records could not be reduced to ocean-survey readings, however, because the instruments tended to accumulate surface contamination and lacked directional shielding.

TABLE 2.2 STATION INSTRUMENTATION

P-TIR, gamma time-intensity recorder on standard platform; D-TIR, gamma time-intensity recorder on deck; IC, incremental collector; SIC, special incremental collector; OCC, open-close total collector; AOC₁, always-open total collector, Type 1; AOC₂, always-open total collector, Type 2; AOC_{1-B}, buried earth-filled total collector; TOAD, time of arrival detector; ESL, film-pack dosimeter; HVF, high-volume filter unit; RA, recording anemometer; SIO-P, Scripps Institution of Oceanography penetration probe; SIO-D, Scripps Institution of Oceanography decay tank probe; and NYO-M, New York Operations Office AEC monitor. Numerals indicate number of instruments.

Stations Type	Designation	Major Sampling Array				Additional Array Instruments			Minor Sampling Array			Special Facility Instruments				
		P-TIR	IC	OCC	AOC ₁	RA	D-TIR	HVF	TOAD	ESL	AOC ₂	SIC	SIO-P	SIO-D	NYO-M	AOC _{1-B}
Ship	YAG 40						1									1
	YAG 40-A															
	YAG 40-B	1	1	4	2	1		1		1			1			
	YAG 39							1						1		1
	YAG 39-C	1	3	4	2	1		1		1						
	LST 611							3								
Barge and How Land	LST 611-D	1	3	4	2	1		1		1						
	YFNB 13-E	1	1	4	2	1			1	1						
	How Land-F	1	1	4	2	1			1	1						12
	YFNB 29-G	1	1	4	2	1			1	1						
Island	Land	1	1	4	2					1						
	How-K								1	1	1					
	George-L								1	1	1					
Raft	William or Charlie-M								1	1	1					
	Raft P								1	1	1					
	Raft R								1	1	1					
Skiff	Raft S								1	1	1					
	Skiff AA								1	1	1					
	Skiff BB								1	1	1					
	Skiff CC								1	1	1					
	Skiff DD								1	1	1					
	Skiff EE								1	1	1					
	Skiff FF								1	1	1					
	Skiff GG								1	1	1					
	Skiff HH								1	1	1					
	Skiff KK								1	1	1					
	Skiff LL								1	1	1					
	Skiff MM								1	1	1					
	Skiff PP								1	1	1					
	Skiff RR								1	1	1					
	Skiff SS								1	1	1					
	Skiff TT								1	1	1					
	Skiff UU								1	1	1					
	Skiff VV								1	1	1					
	Skiff WW								1	1	1					
Skiff XX								1	1	1						
Skiff YY								1	1	1						

Page 28 Deleted.

TABLE 2.3 STATION LOCATIONS IN THE ATOLL AREA

Station	Shot Cherokee		Shot Zuni		Shot Flathead		Shot Navajo		Shot Tewa	
	North Latitude and		North Latitude and		North Latitude and		North Latitude and		North Latitude and	
	East Longitude deg	min	deg	min	deg	min	deg	min	deg	min
YFNB 13 (E)	11	35.3	11	40.0	11	40.0	11	39.1	11	37.5
	165	31.2	165	17.2	165	17.2	165	16.2	165	27.0
YFNB 29 (G, H)	11	37.5	11	37.5	11	37.5	11	36.2	11	37.4
	165	27.0	165	27.0	165	27.0	165	29.8	165	14.2
How Island (F) *	148,320	N	148,320	N	148,320	N	148,320	N	148,320	N
	167,360	E	167,360	E	167,360	E	167,360	E	167,360	E
How Island (K) *	148,450	N	148,450	N	148,450	N	148,450	N	148,450	N
	167,210	E	167,210	E	167,210	E	167,210	E	167,210	E
George Island (L) *	168,530	N	168,530	N	168,530	N	168,530	N	168,530	N
	131,250	E	131,250	E	131,250	E	131,250	E	131,250	E
William Island (M) *	109,030	N	109,030	N	109,030	N	—	—	—	—
	079,540	E	079,540	E	079,540	E	—	—	—	—
Charlie Island (M) *	—	—	—	—	—	—	172,150	N	172,150	N
	—	—	—	—	—	—	081,150	E	081,150	E
Raft-1 (P)	11	35.1	11	35.1	11	35.1	11	35.1	11	35.1
	165	27.6	165	27.6	165	27.6	165	27.6	165	27.6
Raft-2 (R)	11	34.6	11	34.6	11	34.6	11	34.6	11	34.6
	165	22.2	165	22.2	165	22.2	165	22.2	165	22.2
Raft-3 (S)	11	35.4	11	35.4	11	35.4	11	35.4	11	35.4
	165	17.2	165	17.2	165	17.2	165	17.2	165	17.2
Skiff-AA	12	06.1	12	06.1	12	06.1	12	05.4	12	05.4
	164	47.0	164	47.0	164	47.0	164	44.9	164	44.9
Skiff-BB	12	11.6	12	11.6	12	11.6	12	11.5	12	11.5
	165	10.0	165	10.0	165	10.0	165	07.5	165	07.5
Skiff-CC	12	11.3	12	11.3	12	10.7	12	11.8	12	11.8
	165	23.0	165	23.0	165	17.6	165	20.9	165	20.9
Skiff-DD	12	11.5	12	11.5	12	11.5	12	11.5	12	11.5
	165	40.0	165	40.0	165	40.0	165	40.0	165	40.0
Skiff-EE	12	11.3	12	11.3	12	11.3	12	11.3	12	11.3
	165	57.3	165	57.3	165	57.3	165	57.3	165	57.3
Skiff-FF	12	02.4	12	02.4	12	03.5	12	02.4	12	02.4
	166	15.5	166	15.5	166	14.2	166	15.5	166	15.5
Skiff-GG	11	57.8	11	57.8	11	57.8	—	—	12	01.1
	165	13.8	165	13.8	165	13.8	—	—	165	10.2
Skiff-HH	12	01.3	12	01.3	12	02.0	12	02.0	12	02.0
	165	22.9	165	22.9	165	21.6	165	21.6	165	21.6
Skiff-KK	12	02.0	12	02.0	12	02.0	12	02.0	12	02.0
	165	40.0	165	40.0	165	40.0	165	40.0	165	40.0
Skiff-LL	12	02.0	12	02.0	12	02.0	12	02.0	12	02.0
	165	58.0	165	58.0	165	58.0	165	58.0	165	58.0
Skiff-MM	11	52.8	11	52.8	11	52.8	11	52.7	11	52.7
	164	58.4	164	58.4	164	58.4	164	56.0	164	56.0
Skiff-PP	11	52.0	—	—	11	50.5	11	52.0	11	52.0
	165	22.8	—	—	165	23.9	165	22.8	165	22.8
Skiff-RR	11	51.0	11	51.0	11	53.3	11	52.3	11	52.3
	165	40.0	165	40.0	165	35.2	165	39.7	165	39.7
Skiff-SS	11	50.0	11	50.0	11	51.1	—	—	—	—
	165	58.0	165	58.0	165	58.0	—	—	—	—
Skiff-TT	11	50.8	11	50.8	11	50.8	11	50.8	11	50.8
	166	15.0	166	15.0	166	15.0	166	15.0	166	15.0
Skiff-UU	11	42.5	11	42.5	11	42.5	—	—	—	—
	165	47.5	165	47.5	165	47.5	—	—	—	—
Skiff-VV	11	21.7	11	21.7	—	—	—	—	—	—
	165	19.5	165	19.5	—	—	—	—	—	—
Skiff-WW	—	—	—	—	—	—	—	—	11	43.2
	—	—	—	—	—	—	—	—	165	11.5
Skiff-XX	—	—	—	—	—	—	—	—	11	41.2
	—	—	—	—	—	—	—	—	164	55.1
Skiff-YY	—	—	—	—	—	—	—	—	11	54.0
	—	—	—	—	—	—	—	—	164	36.4

* Holmes and Narver coordinates.

TABLE 2.4 SHIP LOCATIONS AT TIMES OF PEAK ACTIVITY

The symbols t_a and t_c represent the times of arrival and cessation of fallout, respectively; t_p is the time of peak observed ionization rate.

Station	Shot Cherokee			Shot Zuni			Shot Flathead			Shot Navajo			Shot Tewa		
	Time	North Latitude and East Longitude		Time	North Latitude and East Longitude		Time	North Latitude and East Longitude		Time	North Latitude and East Longitude		Time	North Latitude and East Longitude	
		TSD, hr	deg		min	TSD, hr		deg	min		TSD, hr	deg		min	TSD, hr
YAG 40 (A, B)	6 (t_a) *	12	40.0	3.4 (t_a)	12	22.0	8.0 (t_a)	12	19.7	6.0 (t_a)	12	12.3	4.4 (t_a)	12	04.5
	9 (t_p) *	164	20.0	165	46.8	165	20.8	165	20.8	165	08.8	164	44.8	164	44.8
		12	40.0	12	22.0	11.6	12	23.2	6.6	12	12.0	6.2	12	04.5	
		164	35.0	165	37.0	165	31.2	165	31.2	165	11.0	164	46.9	164	46.9
				12	22.0	12.8	12	34.7	7.3	12	11.0	7.2 (t_p)	12	06.0	
				165	30.3	165	34.0	165	34.0	165	10.0	164	49.2	164	49.2
				12	22.5	13.8	12	26.0	9.2	12	13.0	8.2	12	06.4	
				165	24.5	165	37.1	165	37.1	165	04.3	164	53.0	164	53.0
				12	22.0	17.0 (t_p)	12	31.9	11.1	12	11.0	8.5 (t_c)	12	06.2	
				165	19.0	165	43.5	165	43.5	165	04.8	164	52.8	164	52.8
				12	23.0	22 (t_c)	12	41.8	12.1	12	12.0	164	52.8	164	52.8
				165	15.4	165	54.3	165	54.3	165	04.8	164	52.8	164	52.8
				12	23.5					12.3 (t_p)	12	12.2			
			165	15.7					165	04.2					
			12	24.4					13.1	12	13.0				
			165	16.2					165	01.0					
									16	12	09.9				
										164	59.5				
YAG 39 (C)	10 (t_a) *	13	18.0	12 (t_a)	13	00.6	4.5 (t_a)	12	04.2	2.3 (t_a)	12	01.8	2.0 (t_a)	12	05.6
	12 (t_p) *	163	42.0	165	02.2	165	23.4	165	23.4	165	18.3	165	12.0	165	12.0
		12	20.0	12	00.6	5.1	12	04.7	4.6	11	59.7	2.2	12	03.5	
		163	40.0	165	03.0	165	18.0	165	18.0	165	20.0	165	12.0	165	12.0
				12	53.0	6.1	12	06.0	5.6	12	01.7	2.7	12	04.0	
				165	02.8	165	25.0	165	25.0	165	19.5	165	13.1	165	13.1
				13	00.0	8.1	12	03.0	6.0 (t_p)	11	59.3	4.7	12	01.5	
				165	07.1	165	26.0	165	26.0	165	20.7	165	18.0	165	18.0
				13	03.8	10.1	12	07.0	6.6	11	57.0	5.0 (t_p)	12	01.6	
				165	00.0	165	27.0	165	27.0	165	22.0	165	18.2	165	18.2
				13	00.4	11.0 (t_p)	12	05.6	8.8	12	02.0	5.3 (t_c)	12	01.8	
				165	00.6	165	27.0	165	27.0	165	20.0	165	18.3	165	18.3
				12	58.0	12.1	12	04.0	9.6	11	59.0				
			165	08.0	165	27.0	165	27.0	165	19.0					
			12	59.0	13 (t_c)	12	05.1	11.6	11	58.0					
			165	01.2	165	27.8	165	27.8	165	20.0					
			13	00.8					12.8	11	57.0				
			165	10.7					165	18.0					
			13	00.0					14.6	11	55.0				
			165	11.4					165	23.5					

TABLE 2.4 CONTINUED

The symbols t_a and t_c represent the times of arrival and cessation of fallout, respectively; t_p is the time of peak observed ionization rate.

Station	Shot Cherokee			Shot Zuni			Shot Flathead			Shot Navajo			Shot Tewa			
	Time	North Latitude and East Longitude		Time	North Latitude and East Longitude		Time	North Latitude and East Longitude		Time	North Latitude and East Longitude		Time	North Latitude and East Longitude		
		TSD, hr	deg		min	TSD, hr		deg	min		TSD, hr	deg		min	TSD, hr	deg
YAG 39 (C)				25 (t_p)	13	00.8				15 (t_c)	12	00.1				
				26.6	13	03.0					165	20.1				
					165	08.0										
				29 (t_c)	13	02.4										
					165	10.7										
LST 611 (D)	20 (t_p) †	14	20.0	18 (t_p) †	13	41.5	6.6 (t_a)	12	06.9	3.0 (t_a)	11	38.2	7.0 (t_a)	12	27.8	
		163	40.0		164	22.0										
							7.3	12	00.0	3.6	11	35.0	7.2	12	25.8	
								164	40.0		164	40.0		164	38.9	
							7.6	12	00.0	4.4	11	33.7	10.2	12	24.0	
								164	42.0		164	41.8		164	48.3	
							8.3	12	01.6	5.1	11	35.6	12.2	12	25.5	
								164	43.5		164	41.5		164	49.0	
							9.1 (t_p)	12	02.0	6.1 (t_p)	11	34.1	13.2	12	25.0	
								164	47.0		164	42.4		164	50.5	
							12.6	12	03.0	7.1	11	34.8	13.6 (t_p)	12	25.3	
								165	01.0		164	41.5		164	50.4	
							15.6	12	05.0	7.6	11	37.2	14 (t_c)	12	25.4	
								165	13.0		164	41.0		164	50.3	
							18.2	11	46.0	10.1	11	35.8				
								165	08.0		164	39.5				
							20 (t_c)	11	47.4	12.1	11	34.2				
									165	16.2		164	39.6			
										12.9	11	33.7				
											164	38.7				
											11	33.9				
										13 (t_c)		164	38.8			

* Questionable value; activity near background level.

† Predicted value; no fallout occurred.

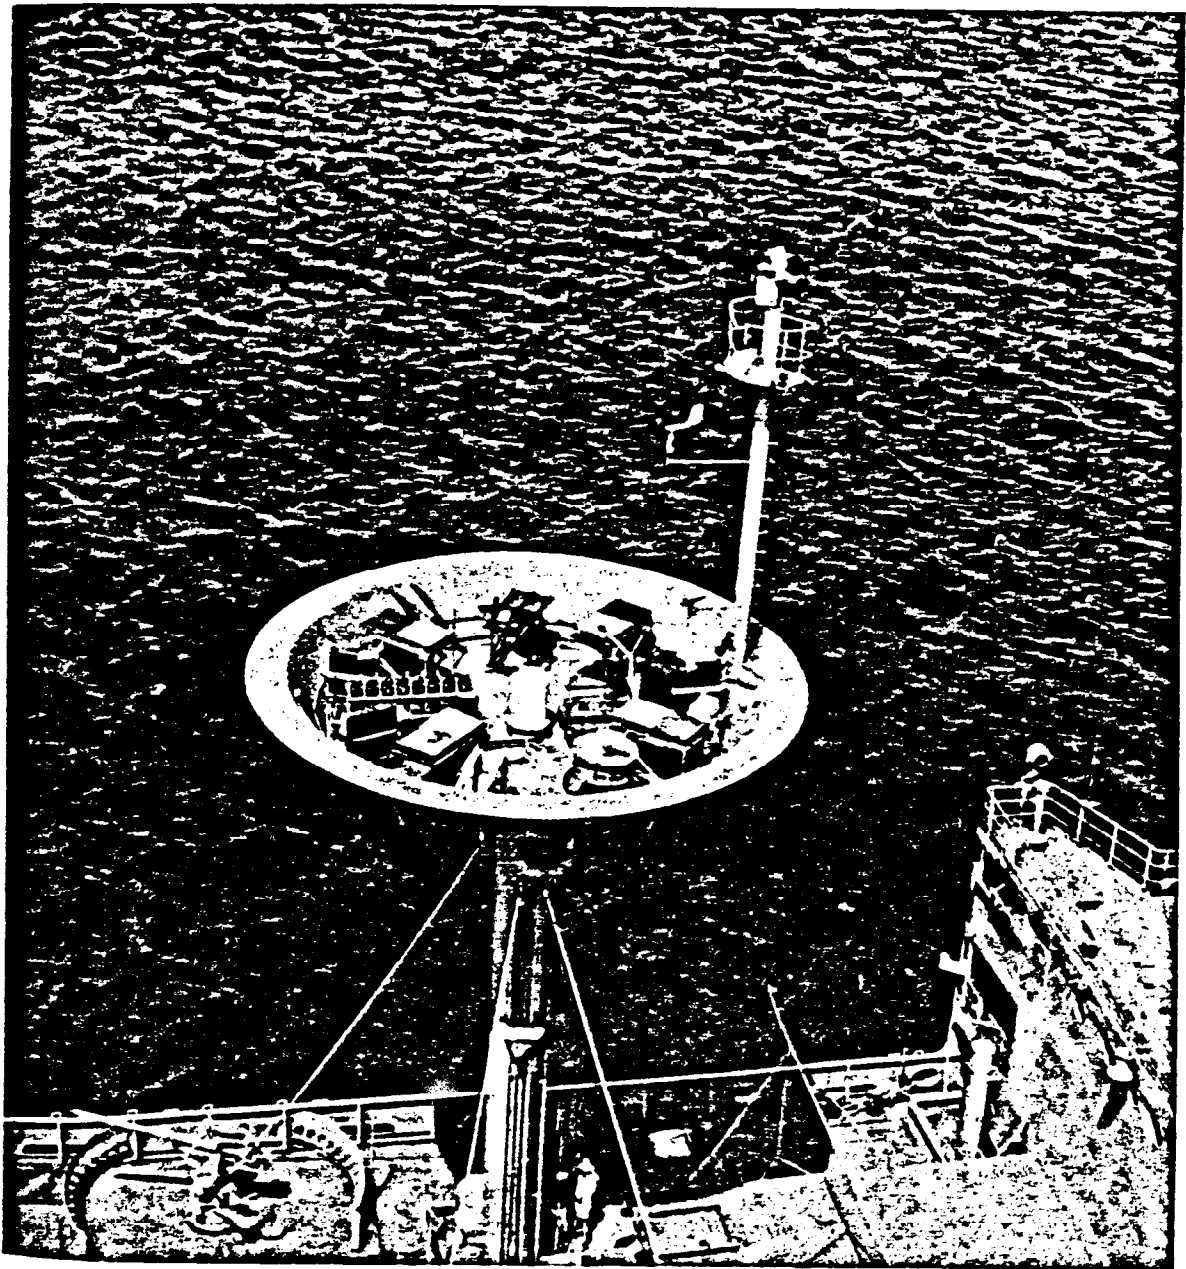


Figure 2.1 Aerial view of major sampling array.

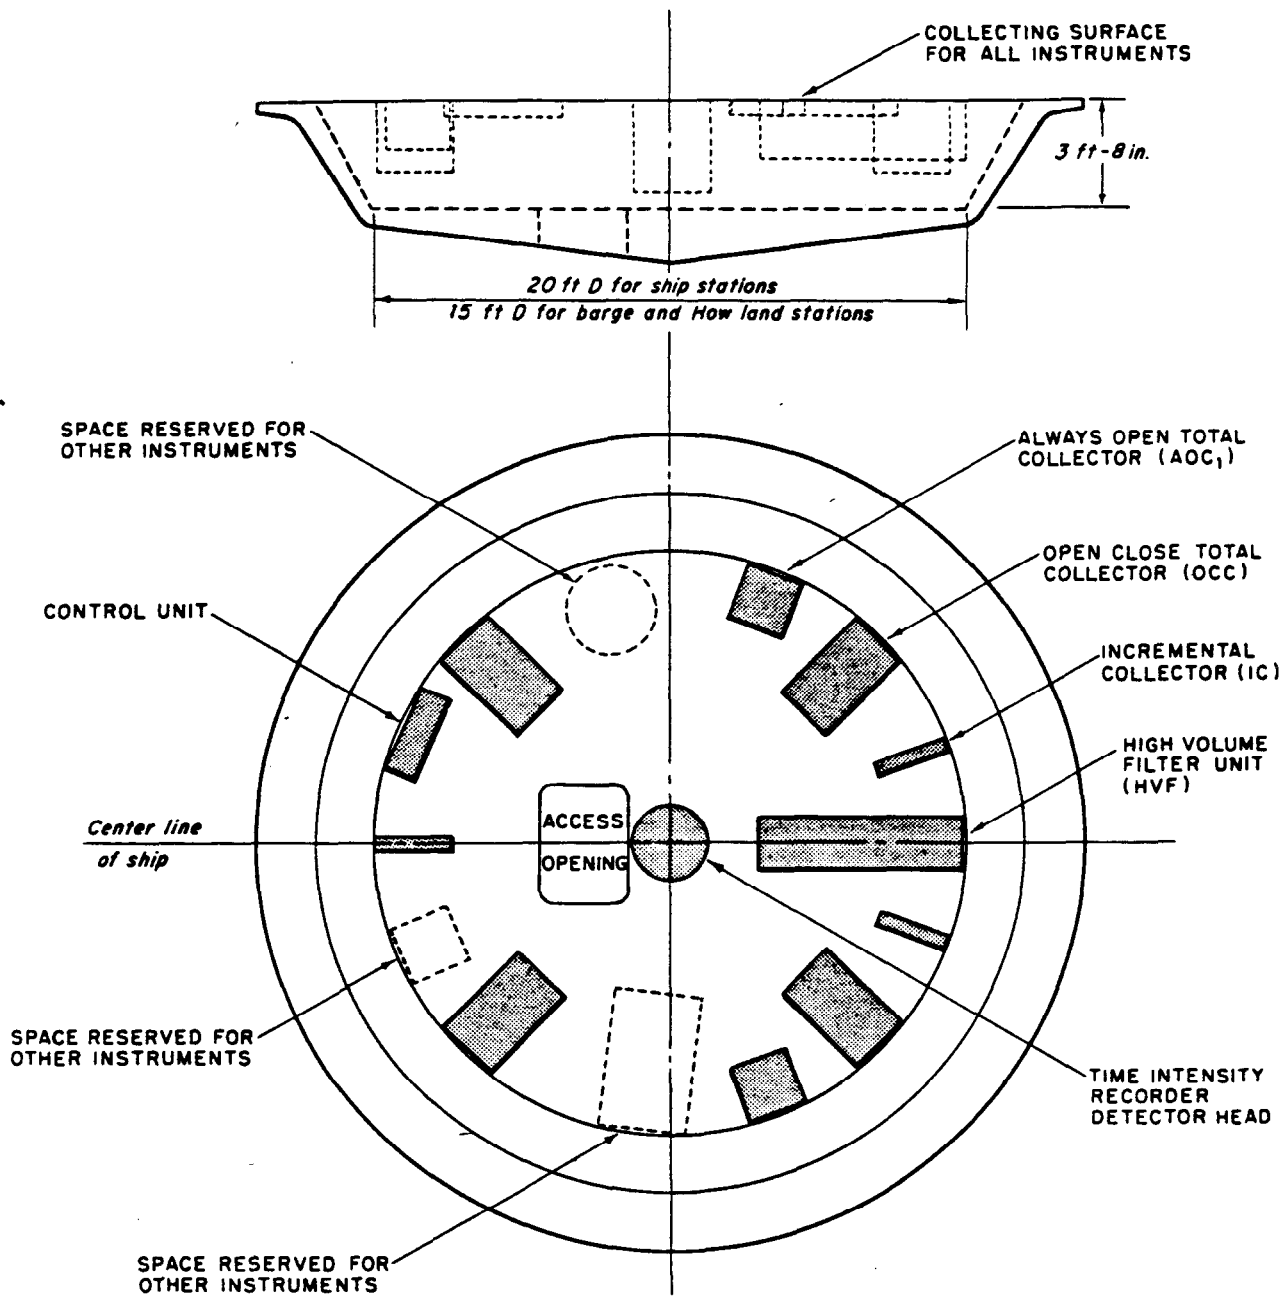


Figure 2.2 Plan and elevation of major sampling array.

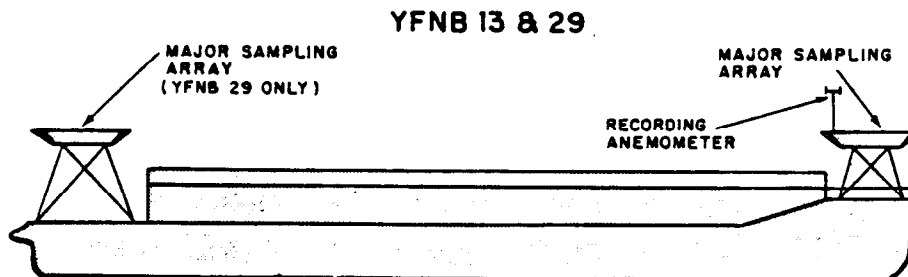
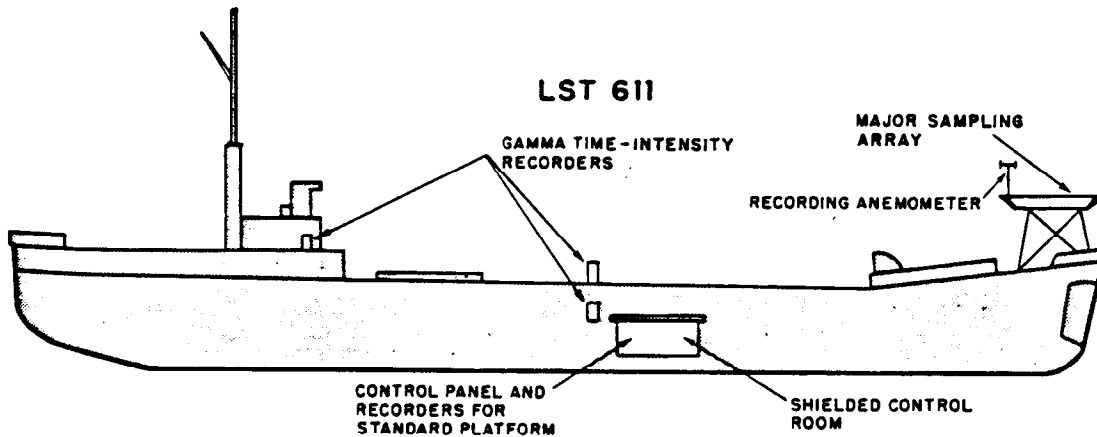
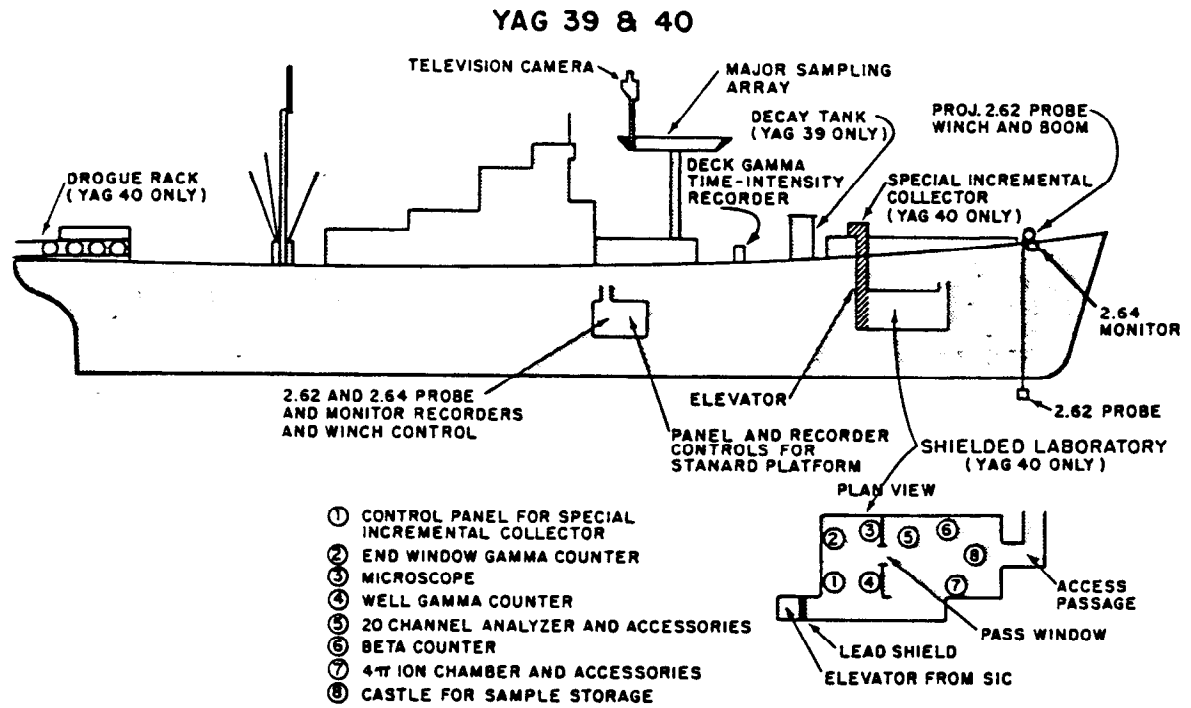


Figure 2.3 Ship and barge stations.

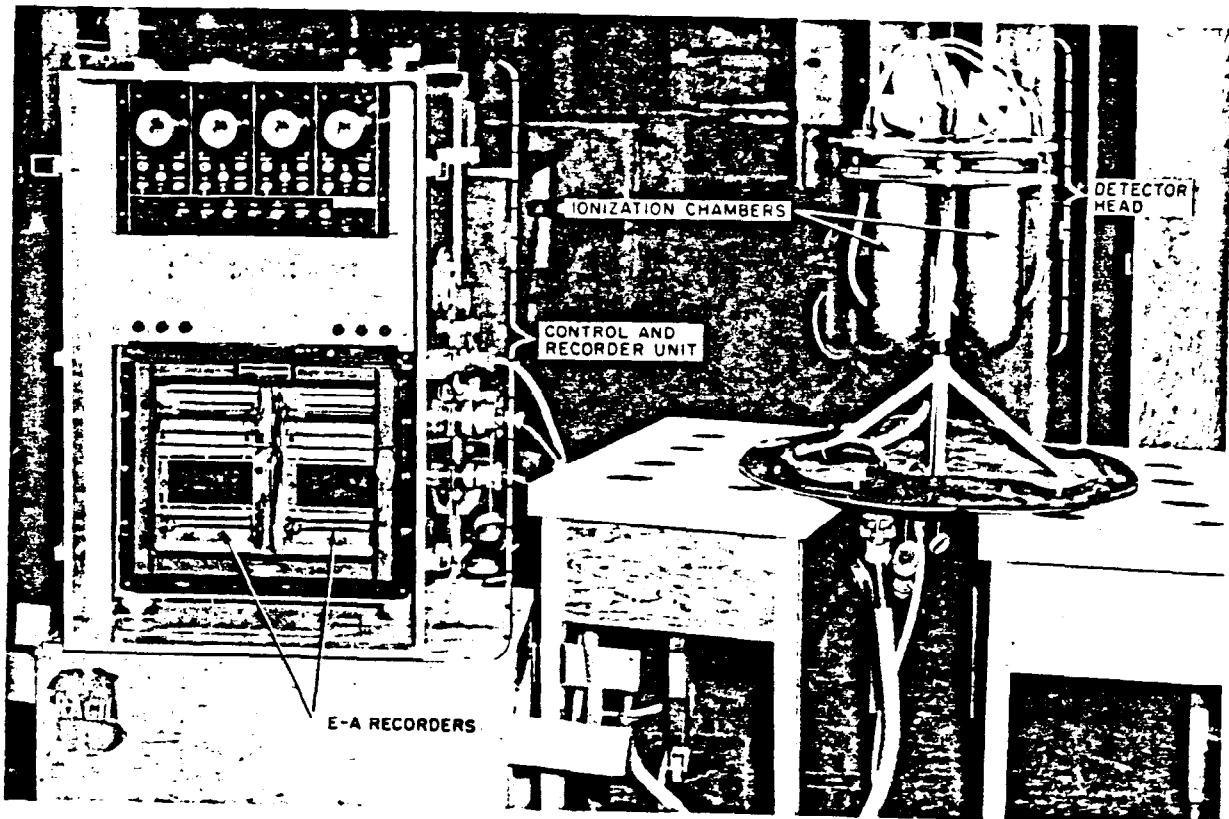


Figure 2.4 Functional view of gamma time-intensity recorder (TIR).

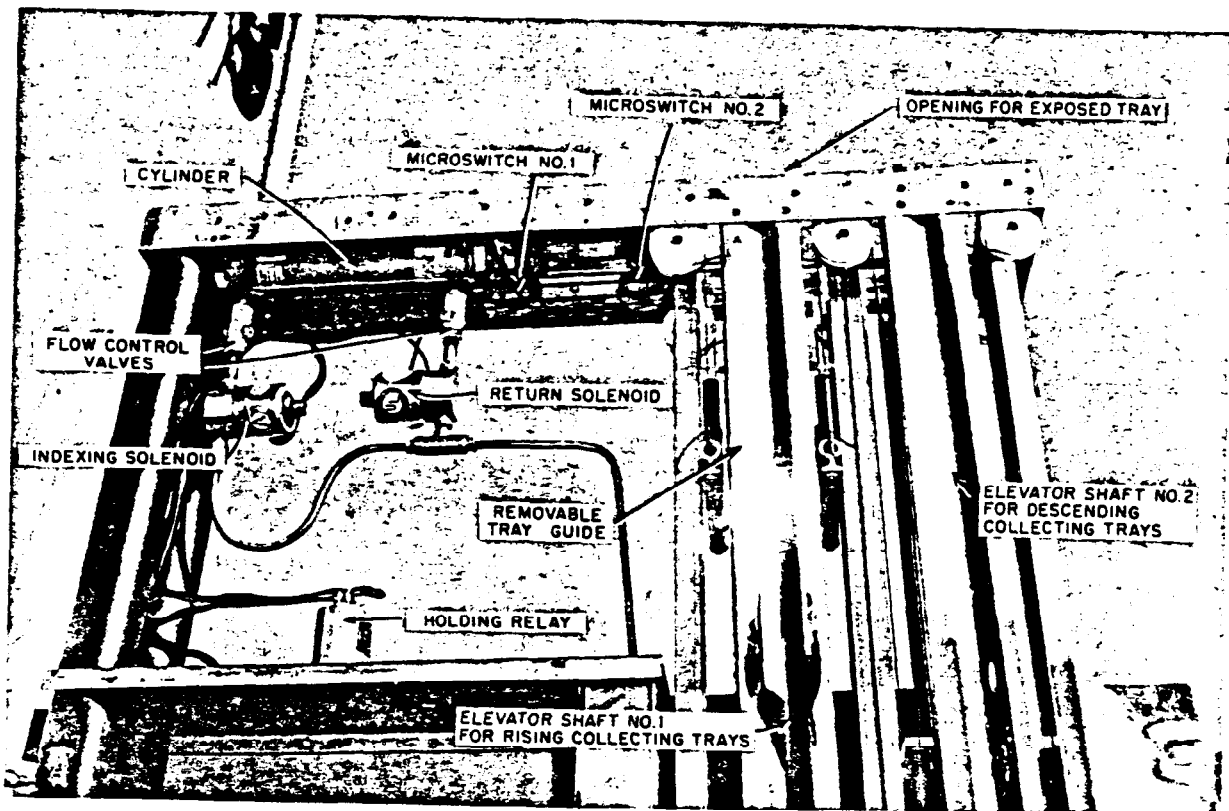


Figure 2.5 Functional view of incremental collector (IC).

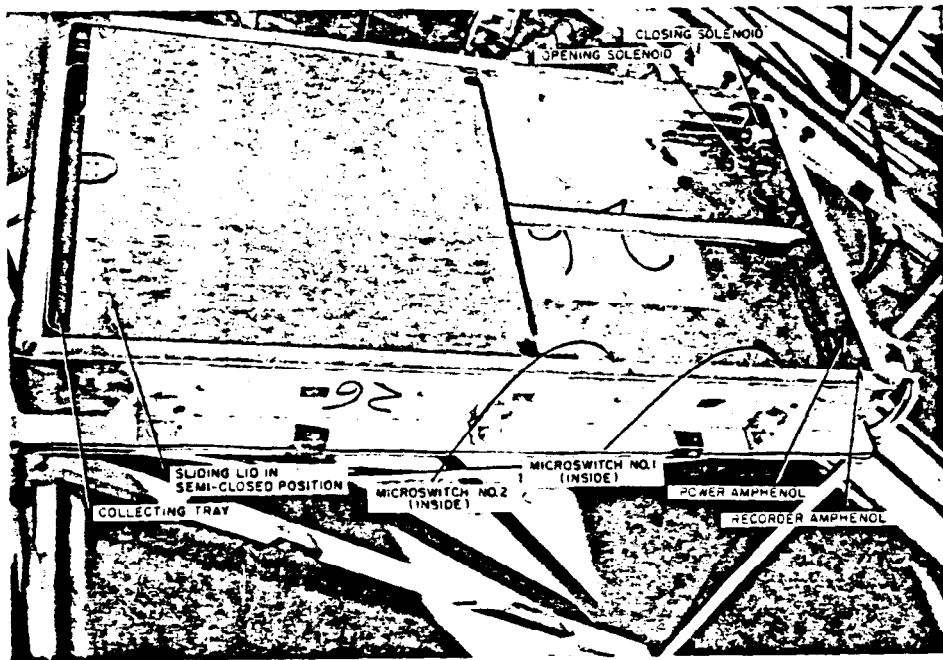


Figure 2.6 Functional view of open-close total collector (OCC).

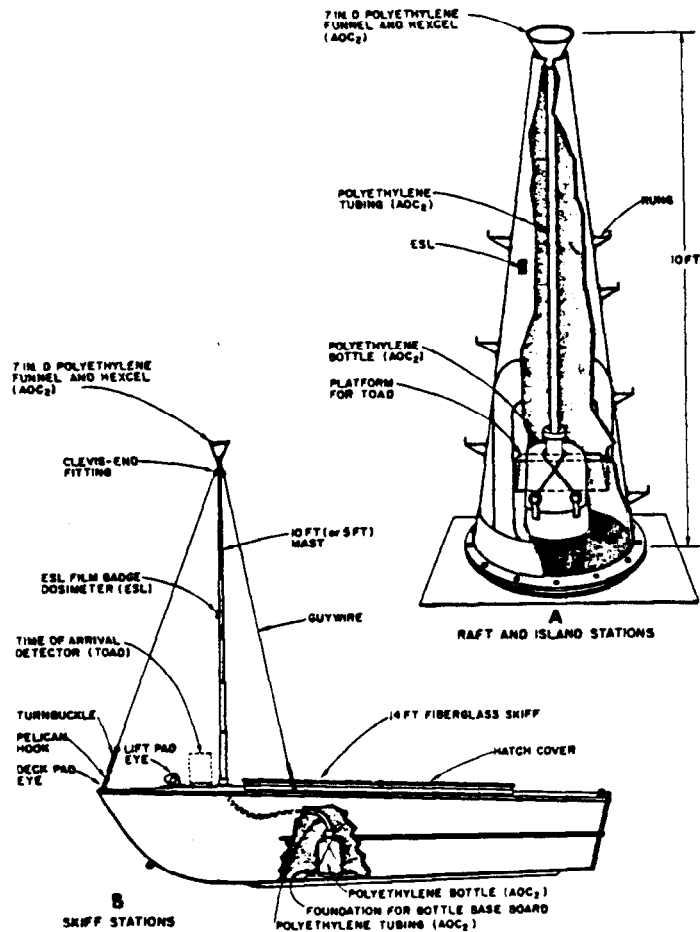


Figure 2.7 Minor sampling array.










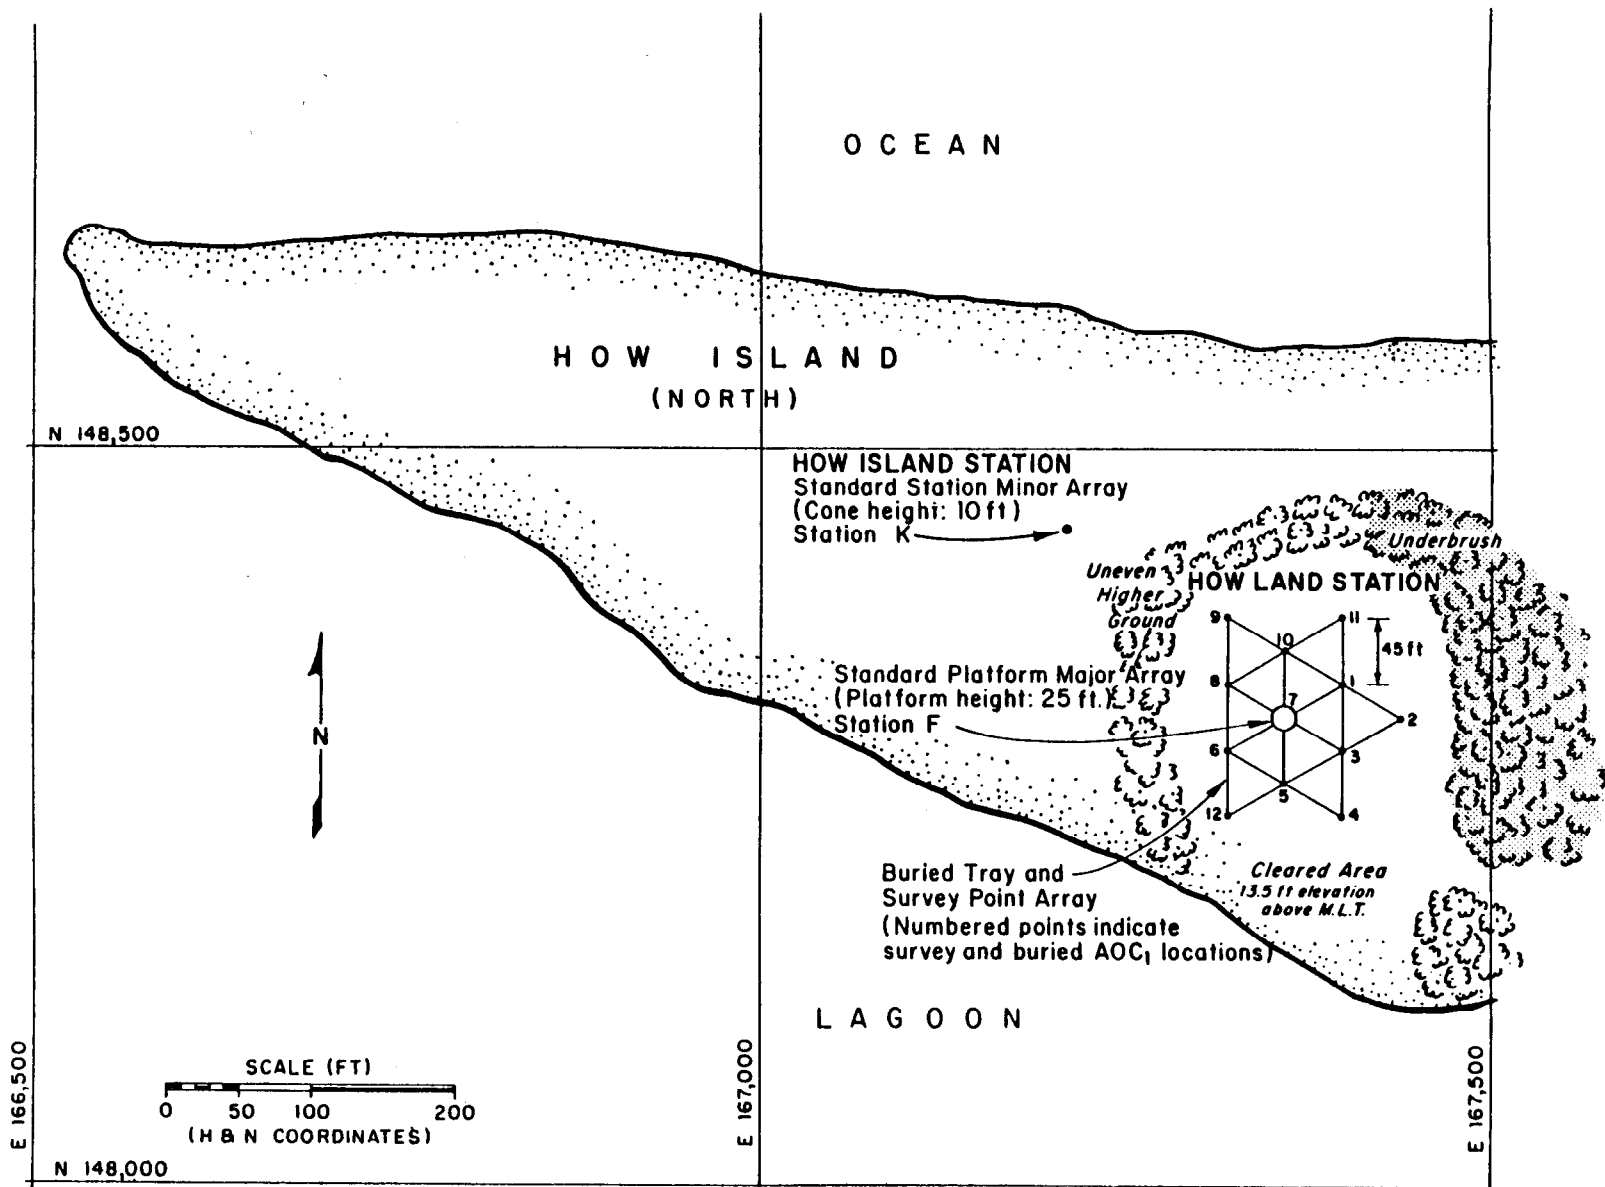


Figure 2.8 Location map and plan drawing of Site How.

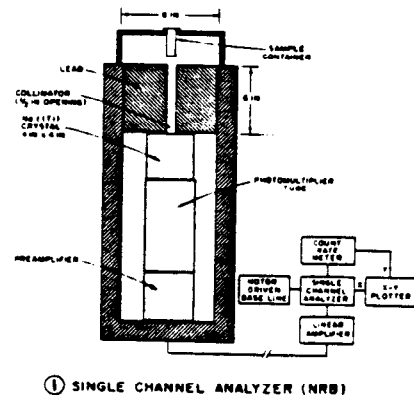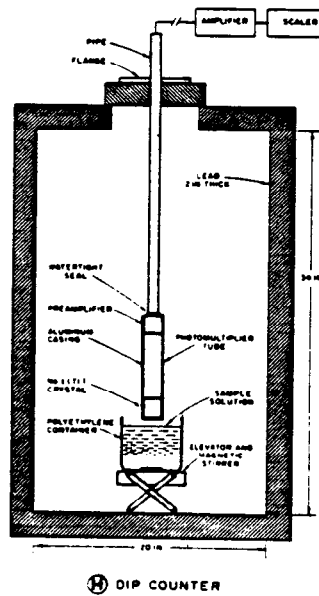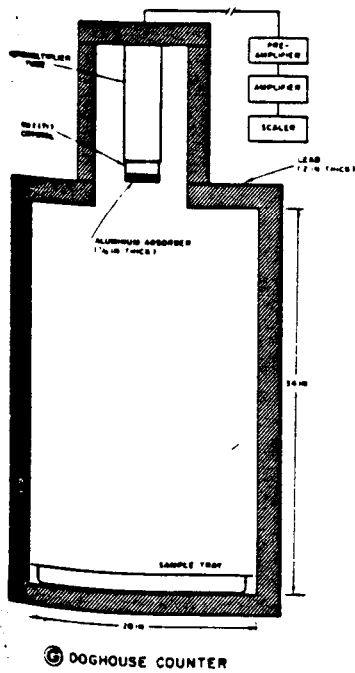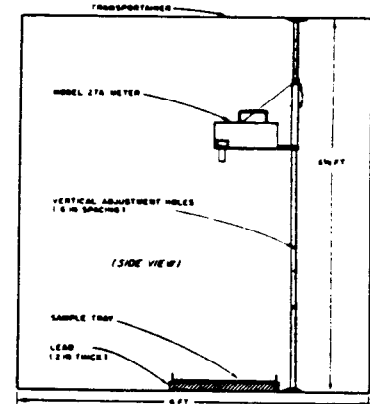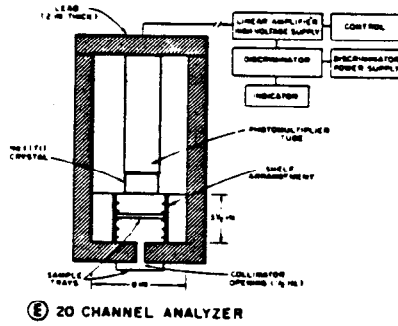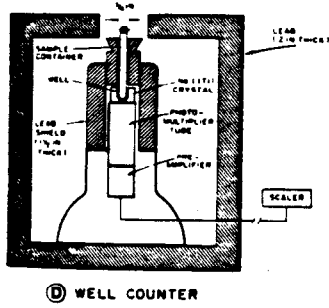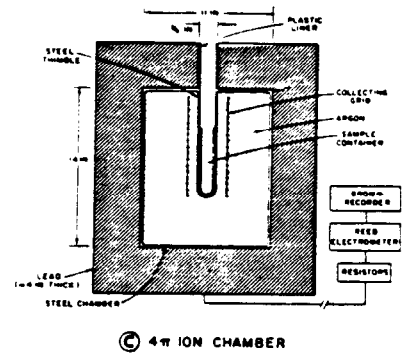

Drawings are not to scale

Figure 2.9 Counter geometries.

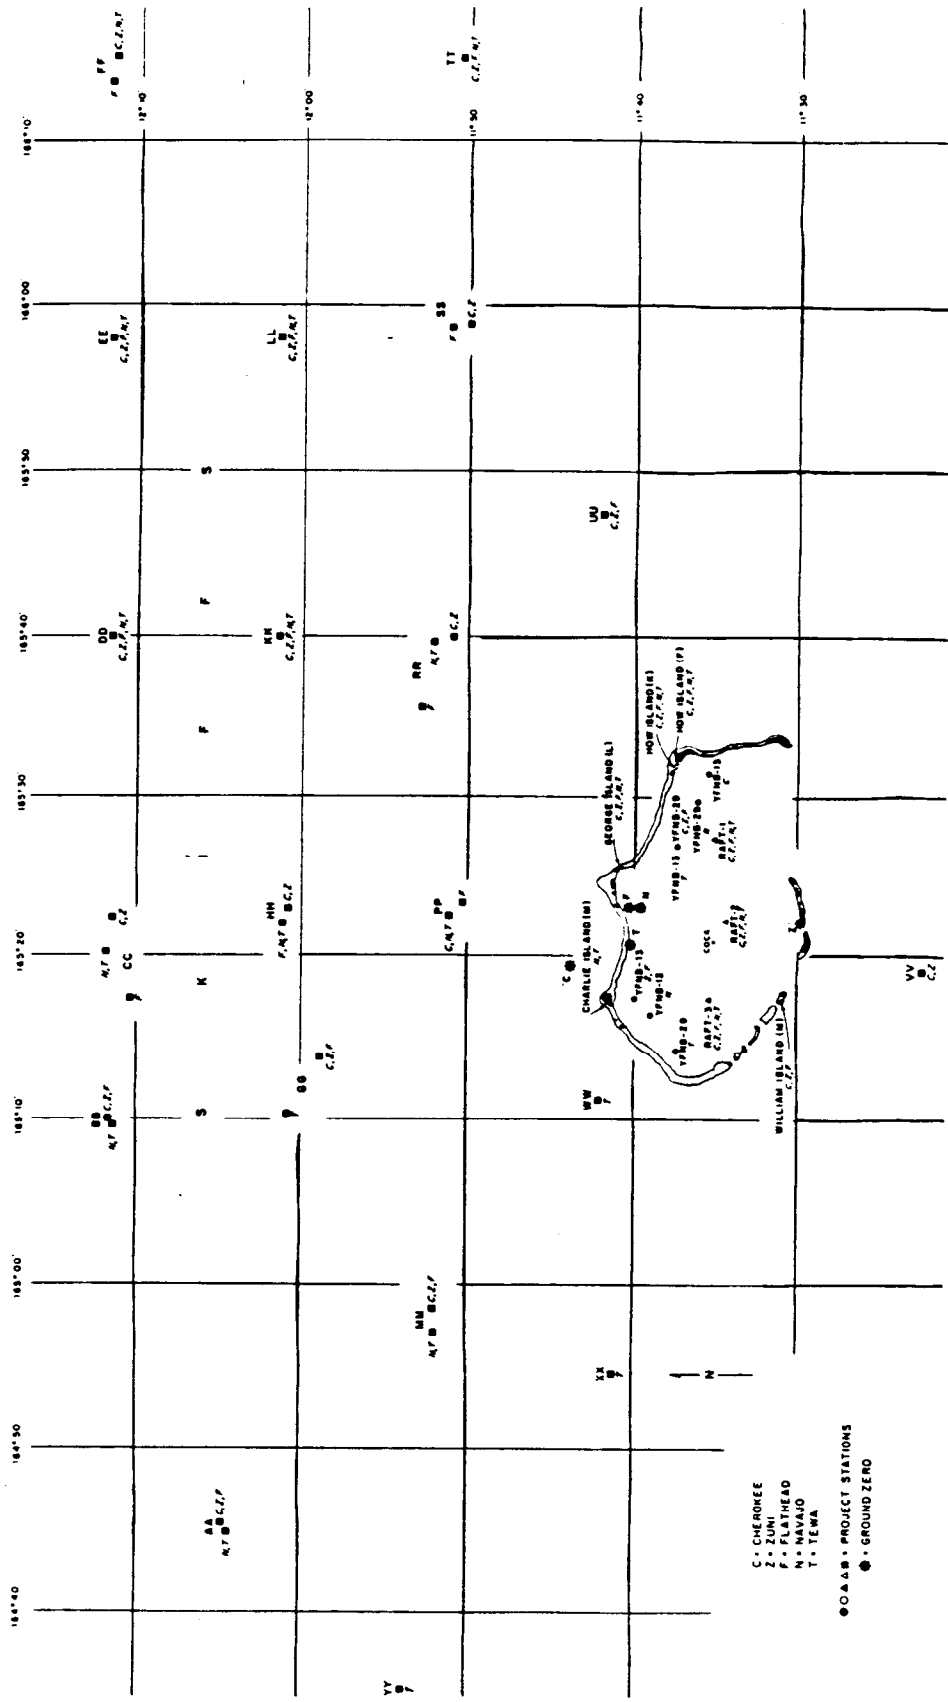


Figure 2.10 Station locations in the atoll area.

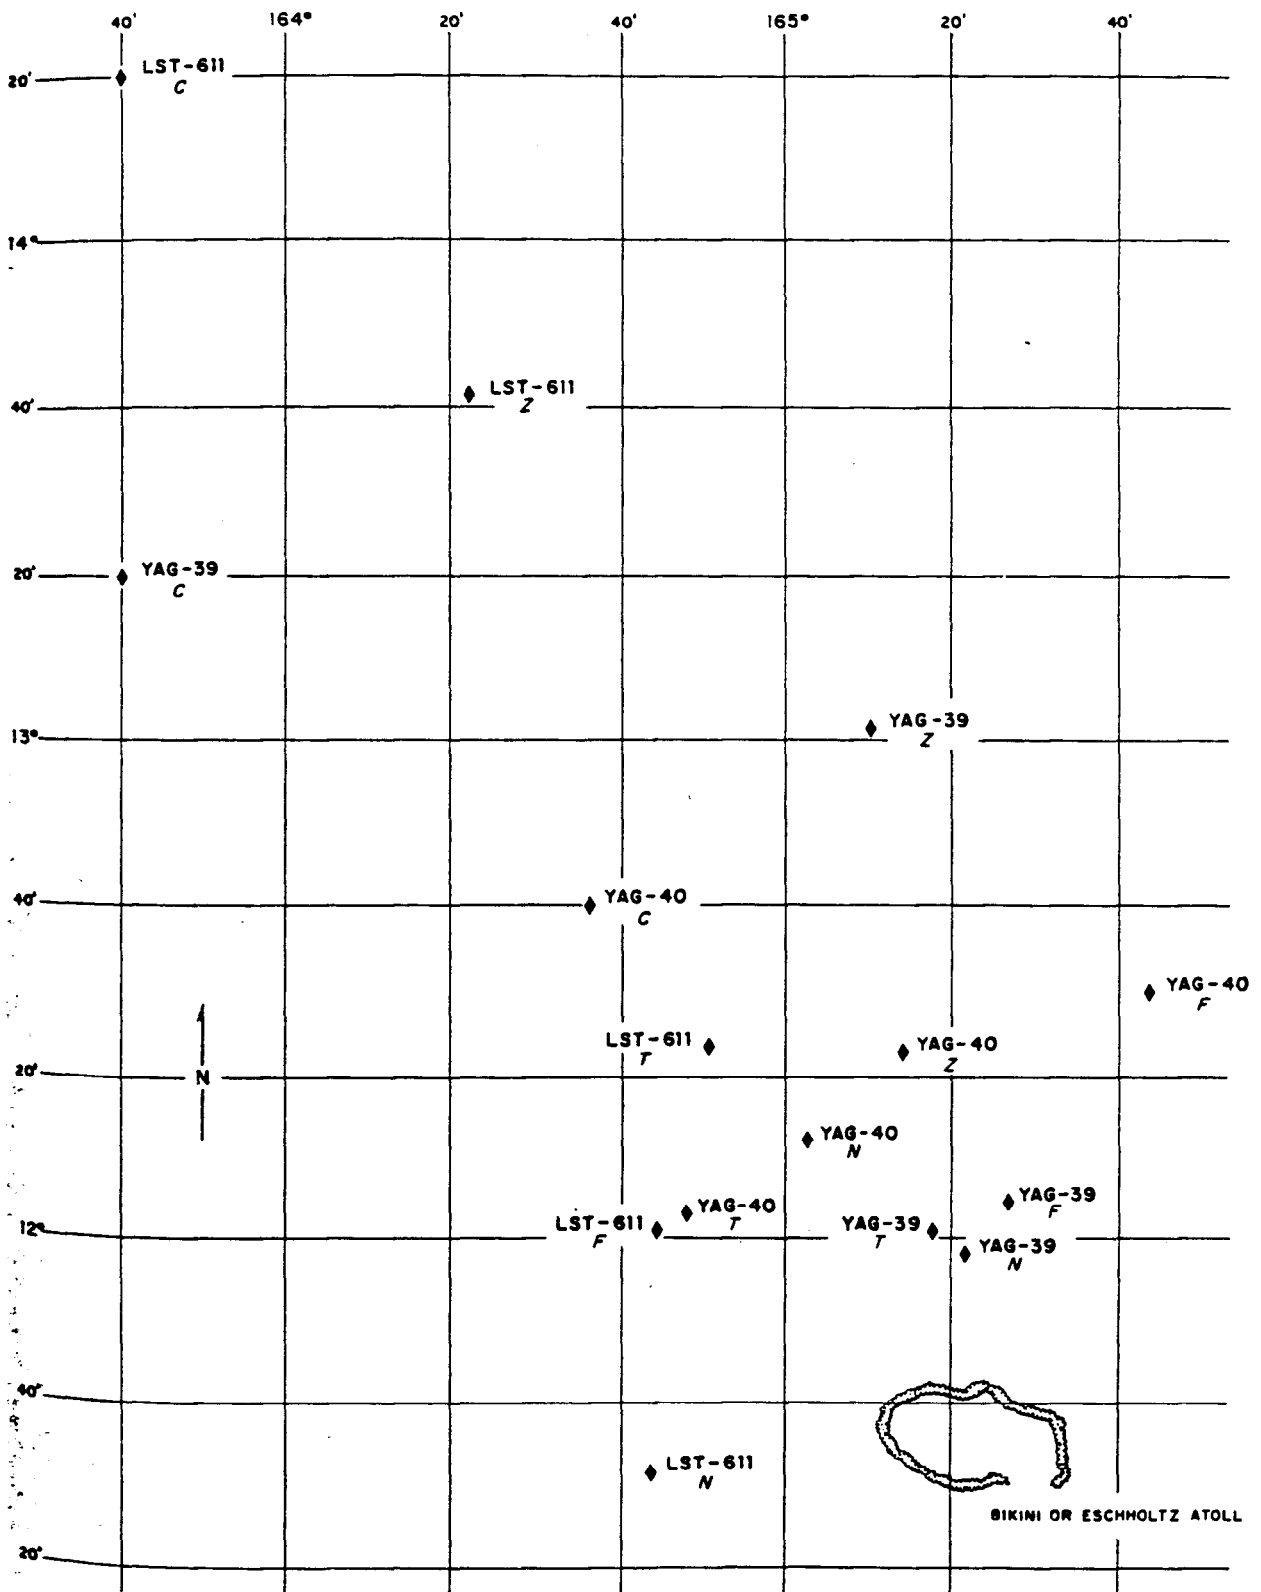


Figure 2.11 Ship locations at times of peak activity.

Chapter 3

RESULTS

3.1 DATA PRESENTATION

The data has been reduced and appears in comprehensive tables (Appendix B) that summarize certain kinds of information for all shots and stations. The text itself contains only derived results.

In general, the details of calculations, such as those involved in reducing gross gamma spectra to absolute photon intensities or in arriving at R-values, have not been included. Instead, original data and final results are given, together with explanations of how the latter were obtained and with references to reports containing detailed calculations.

Results for the water-surface Shots Flathead and Navajo, and the land-surface and near-land-surface Shots Zuni and Tewa, are presented in four categories: fallout-buildup characteristics (Section 3.2); physical, chemical, and radiochemical characteristics of the contaminated material (Section 3.3); its radionuclide composition and radiation characteristics (Section 3.4); and correlations of results (Section 4.3). Appendix B contains all reduced data for these shots separated into three types: that pertaining to the buildup phase (Section B.1); information on physical, chemical, and radiological properties (Section B.2); and data used for correlation studies (Section B.3).

Measurements and results for Shot Cherokee, an air burst during which very little fallout occurred, are summarized in Section 4.1.

Unreduced data are presented in Section B.4.

Each of the composite plots of TIR readings and IC tray activities presented in the section on buildup characteristics may be thought of as constituting a general description of the surface radiological event which occurred at that station. In this sense the information needed to complete the picture is provided by the remainder of the section on particle-size variation with time and mass-arrival rate, as well as by the following sections on the activity deposited per unit area, the particulate properties of the contaminated material, its chemical and radiochemical composition, and the nature of its beta- and gamma-ray emissions. Penetration rates and activity profiles in the ocean extend the description to subsurface conditions at the YAG locations. The radiological event that took place at any major station may be reconstructed in as much detail as desired by using Figures 3.1 through 3.4 as a guide and referring to the samples from that station for the results of interest. Each sample is identified by station, collector, and shot in all tables and figures of results, and the alphabetical and numerical designations assigned to all major array collectors are summarized in Figure A.1.

Throughout the treatment which follows, emphasis has been placed on the use of quantities such as fissions per gram and R^{99} values, whose variations show fundamental differences in fallout properties. In addition, radiation characteristics have been expressed in terms of unit fissions wherever possible. As a result, bias effects are separated, certain conclusions are made evident, and a number of correlations become possible. Some of the latter are presented in Sections 3.3, 3.4, and 4.3.

3.2 BUILDUP CHARACTERISTICS

3.2.1 Rate of Arrival. Reduced and corrected records of the ionization rates measured by one TIR and the sample activities determined from one IC at each major array station are plotted against time since detonation (TSD) in Figures 3.1 through 3.4 for Shots Flathead, Navajo,

Zuni, and Tewa. Numerical values are tabulated in Tables B.1 and B.2. Because the records of the TIR's and the deck (D-TIR) are plotted for the YAG's, the measurements made by the TIR's in the standard platform (P-TIR) have been included in Appendix B. The records of the IC's with shorter collection intervals have been omitted, because they show only the greater variability in the fine structure of the other curves and do not cover the entire fallout period.

TIR readings have been adjusted in accordance with the calibration factors applying to the four ionization chambers present in each instrument, and corrected to account for saturation loss over all ranges. (The adjustments were made in accordance with a private communication from H. Rinnert, NRDL, and based upon Co^{60} gamma rays incident on an unobstructed chamber, normal to its axis.) Recorder speeds have also been checked and the time applying to each reading verified. In those cases where saturation occurred in the highest range, readings have been estimated on the basis of the best information available and the curves dotted in on the figures.

It is pointed out that these curves give only approximate air-ionization rates. Because of the varying energy-response characteristics of each ionization chamber, and internal shielding effects resulting from the construction of the instrument, TIR response was nonuniform with respect both to photon energy and direction, as indicated in Figures A.2 through A.4. The overall estimated effect was to give readings as much as 20 percent lower than would have been recorded by an ideal instrument. (Measurements were made on the YAG 39 and YAG 40 during all four shots with a Cutie Pie or T1B hand survey meter held on top of an operating TIR. The TIR's indicated, on the average, 0.85 ± 25 percent of the survey meter readings, which themselves indicate only about 75 percent of the true dose rate 3 feet above a uniformly distributed plane source (Reference 17). Total doses calculated from TIR curves and measured by film-pack dosimeters (ESL) at the same locations are compared in Section 4.3.5.)

Detailed corrections are virtually impossible to perform, requiring source strength and spectral composition as functions of direction and time, combined with the energy-directional response characteristics of each chamber. It is also pointed out that these sources of error are inherent to some degree in every real detector and are commonly given no consideration whatsoever. Even with an ideal instrument, the measured dose rates could not be compared with theoretical land-equivalent dose rates because of irregularities in the distribution of the source material and shielding effects associated with surface conditions. However, a qualitative study of the performance characteristics of ship, barge, and island TIR's indicated that all performed in a manner similar for the average numbers of fissions deposited and identical radionuclide compositions.

The exposure interval associated with each IC tray has been carefully checked. In those cases where the time required to count all of the trays from a single instrument was unduly long, activities have been expressed at a common time of H+12 hours. Background and coincidence loss corrections have also been made.

The time interval during which each tray was exposed is of particular importance, not only because its midpoint fixes the mean time of collection, but also because all tray activities in counts per minute (counts/min) have been normalized by dividing by this interval, yielding counts per minute per minute of exposure (counts/min²). Such a procedure was necessary, because collection intervals of several different lengths were used. The resulting quantity is an activity-arrival rate, and each figure shows how this quantity varied over the successive collection intervals at the reference time, or time when the trays were counted. If it can be established that mass is proportional to activity, these same curves can be used to study mass-arrival rate with time (Section 3.2.3, Shots Flathead and Navajo); if, on the other hand, the relationship of mass to activity is unknown, they may be used for comparison with curves of mass-arrival rate constructed by some other means (Section 3.2.3, Shots Zuni and Tewa).

Thus, while each point on a TIR curve expresses the approximate gamma ionization rate produced at that time by all sources of activity, the corresponding time point on the IC curve gives the decay-corrected relative rate at which activity was arriving. Both complementary kinds of information are needed for an accurate description of the radiological event that took place at a given station and are plotted together for this reason—not because they are comparable in any other way.

The activities of the IC trays have not been adjusted for sampling bias, although some undoubtedly exists, primarily because its quantitative effects are unknown. Relative rates may still be derived if it is assumed that all trays are biased alike, which appears reasonable for those cases in which wind speed and direction were nearly constant during the sampling period (Section 4.3.2). More extensive analysis would be required to eliminate uncertainties in the remaining cases.

It should also be mentioned that IC trays with alternating greased-disk and reagent-film collecting surfaces were intentionally used in all of the collectors for Shots Flathead and Navajo — with no detectable difference in efficiency for the resulting fallout drops — and of necessity for Shot Tewa. The late move of Shot Tewa to shallow water produced essentially solid particle fallout, for which the efficiency of the reagent film as a collector was markedly low. Thus, only the greased-disk results have been plotted for the YAG 40 in Figure 3.4, although it was necessary to plot both types for some of the other stations. Trays containing reagent-film disks, all of which were assigned numbers between 2994 and 3933, may be distinguished by reference to Table B.2. A few trays, designated by the prefix P, also contained polyethylene disks to facilitate sample recovery.

3.2.2 Times of Arrival, Peak Activity, and Cessation. The times at which fallout first arrived, reached its peak, and ceased at each major array station are summarized for all shots in Table 3.1. Peak ionization rates are also listed for convenient reference. Time of arrival detector (TOAD) results, covering all minor array stations and providing additional values for the major stations in the atoll area, are tabulated in Table 3.2.

The values given in Table 3.1 were derived from Figures 3.1 through 3.4, and the associated numerical values in Tables B.1 and B.2, by establishing certain criteria which could be applied throughout. These are stated in the table heading; while not the only ones possible, they were felt to be the most reasonable in view of the available data.

Arrival times (t_a) were determined by inspection of both TIR and IC records, the resulting values being commensurate with both. Because the arrival characteristics varied, arrival could not be defined in some simple way, such as "1 mr/hr above background." The final values, therefore, were chosen as sensible-arrival times, treating each case individually. It should be mentioned that, within the resolving power of the instruments used, no time difference existed between the onset of material collections on the IC trays and the toe of the TIR buildup curve. The IC's on the ships were manually operated and generally were not triggered until the arrival of fallout was indicated by the TIR or a survey meter, thus precluding any arrival determination by IC; those at the unmanned stations, however, triggered automatically at shot time, or shortly thereafter, and could be used. The SIC on the YAG 40 also provided usable data, ordinarily yielding an earlier arrival time than IC B-7 on the same ship. In order to conserve trays, however, the number exposed before fallout arrival was kept small, resulting in a larger time uncertainty within the exposure interval of the first active tray.

Once defined, times of peak activity (t_p) could be taken directly from the TIR curves. Because peaks were sometimes broad and flat, however, it was felt to be desirable to show also the time interval during which the ionization rate was within 10 percent of the peak value. Examination of these data indicated that $t_p \sim 2t_a$; this point is discussed and additional data are presented in Reference 18.

Cessation time (t_c) is even more difficult to define than arrival time. In almost every case, for example, fallout was still being deposited at a very low rate on the YAG 40 when the ship departed station. Nevertheless, an extrapolated cessation time which was too late would give an erroneous impression, because 90 or 95 percent of the fallout was down hours earlier. For this reason, IC-tray activities measured at a common time were cumulated and the time at which 95 percent of the fallout had been deposited read off. A typical curve rises abruptly, rounds over, and approaches the total amount of fallout asymptotically. Extrapolated cessation times were estimated primarily from the direct IC plots (Figures 3.1 through 3.4), supplemented by the cumulative plots, and the TIR records replotted on log-log paper. It must be emphasized

that the cessation times reported are closely related to the sensitivity of the measuring systems used and the fallout levels observed.

All values for time of arrival given in Table 3.2 were determined from TOAD measurements. They were obtained by subtracting the time interval measured by the instrument clock, which started when fallout arrived, from the total period elapsed between detonation and the time when the instrument was read.

Because the TOAD's were developed for use by the project and could not be proof-tested in advance, certain operational problems were encountered in their use; these are reflected by Footnotes §, ¶ and † in Table 3.2. Only Footnote † indicates that no information was obtained by the units; however, Footnotes § and ¶ are used to qualify questionable values. Because the TOAD's from the barge and island major stations were used elsewhere after Shot Flathead, Footnote * primarily expresses the operational difficulties involved in servicing the skiffs and keeping them in place.

The fact that a station operated properly and yet detected no fallout is indicated in both tables by Footnote ‡. In the case of the major stations, this means that the TIR record showed no measurable increase and all of the IC trays counted at the normal background rate. For the minor stations, however, it means that the rate of arrival never exceeded 20 mr/hr per half hour, because the radiation trigger contained in the TOAD was set for this value.

3.2.3 Mass-Arrival Rate. A measure of the rate at which mass was deposited at each of the major stations during Shots Zuni and Tewa is plotted in Figure 3.5 from data contained in Table B.4; additional data are contained in Table B.6. Corresponding mass-arrival rates for Shots Flathead and Navajo may be obtained, where available, by multiplying each of the IC-tray activities ($\text{count}/\text{min}^2$) in Figures 3.1 and 3.2 by the factor, micrograms per square feet per hour per counts per minute per minute, $[\mu\text{g}/(\text{ft}^2\text{-hr-count}/\text{min}^2)]$. For the YAG 40, YAG 39, and LST 611, the factor is 0.0524 for Shot Flathead and 0.771 for Shot Navajo. For the YFNB 29, the factor is 0.343 for Shot Flathead. For the YFNB 13 and How-F, the factor is 3.69 for Shot Navajo.

The former values of mass-arrival rate, micrograms per square foot per hour $[\mu\text{g}/(\text{ft}^2/\text{hr})]$, were calculated from the particle-size distribution studies in Reference 19, discussed in more detail in Section 3.2.4. The number of solid particles in each size increment deposited per square foot per hour was converted to mass by assuming the particles to be spheres with a density of $2.36 \text{ gm}/\text{cm}^3$. Despite the fact that a few slurry particles might have been present (Section 3.3.1), these values were then summed, over all size increments, to obtain the total mass-arrival rate for each tray, or as a function of time since detonation (TSD). These results may not be typical for the geographic locations from which the samples were taken, because of collector bias (Section 4.3.2).

Because this result will be affected by any discrepancy between the number of particles of a certain size, which would have passed through an equal area in free space had the tray not been present, and the number ultimately collected by the tray and counted, both sampling bias (Section 4.3.2) and counting error (Section 3.2.4) are reflected in the curves of Figure 3.5. For this reason they, like the curves of Section 3.2.1, are intended to provide only relative-rate information and should not be integrated to obtain total-mass values, even over the limited periods when it would be possible to do so. The total amount of mass (mg/ft^2) deposited at each major station, determined from chemical analysis of OCC collections, is given in Table 3.16.

The constants to be used for the water-surface shots follow from the slurry-particle sodium chloride analyses in Reference 31 and were derived on the basis of experimentally determined values relating well-counter gamma activity to sodium chloride weight in the deposited fallout. These values and the methods by which they were obtained are presented in Section 3.3.2. The factors were calculated from the ratio of counts per minute per minute ($\text{count}/\text{min}^2$) for the IC-tray area to counts per minute per gram $[(\text{counts}/\text{min})/\text{gm}]$ of NaCl from Table 3.12. The grams of NaCl were converted to grams of fallout, with water included, in the ratio of 1/2.2; and the gamma well counts from the table were expressed as end-window gamma counts by use of the ratio 1/62. An average value of specific activity for each shot was used for the ship stations,

while a value more nearly applicable for material deposited from 1 to 3 hours after detonation was used for the barge and island stations.

It is to be noted that the insoluble solids of the slurry particles (Section 3.3.2) were not included in the conversion of grams of NaCl to grams of fallout. Even though highly active, they constituted less than 2 to 4 percent of the total mass and were neglected in view of measurement errors up to ± 5 percent for sodium chloride, ± 15 percent for specific activity, and ± 25 percent for water content.

3.2.4 Particle-Size Variation. The way in which the distribution of solid-particle sizes varied over the fallout buildup period at each of the major stations during Shots Zuni and Tewa is shown in Figures 3.6 through 3.9. The data from which the plots were derived are tabulated in Table B.3, and similar data for a number of intermediate collection intervals are listed in Table B.5. All of the slurry particles collected over a single time interval at a particular location during Shots Flathead and Navajo tended to fall in one narrow size range; representative values are included in Table 3.12.

The information contained in Tables B.3 through B.6 and plotted in the figures represents the results of studies described in detail in Reference 19. All IC trays were inserted in a fixed setup employing an 8-by-10-inch-view camera and photographed with a magnification of 2, soon after being returned to NRDL. Backlighting and low-contrast film were used to achieve maximum particle visibility. A transparent grid of 16 equal rectangular areas was then superimposed on the negative and each area, enlarged five times, printed on 8-by-10-inch paper at a combined linear magnification of 10.

Since time-consuming manual methods had to be used in sizing and counting the photographed particles, three things were done to keep the total number as small as possible, consistent with good statistical practice and the degree of definition required. (1) The total number of trays available from each collector was reduced by selecting a representative number spaced at more or less equal intervals over the fallout-buildup period. Reference was made to the TIR and IC curves (Figures 3.1 to 3.4) during the selection process, and additional trays were included in time intervals where sharp changes were indicated. (2) Instead of counting the particles in all areas of heavily loaded trays, a diagonal line was drawn from the most dense to the least dense edge and only those areas selected which were intersected by the line. (3) No particles smaller than 50 microns in diameter were counted, this being arbitrarily established as the size defining the lower limit of significant local fallout. (The lower limit was determined from a fallout model, using particle size as a basic input parameter (Section 4.3.1). Particles down to ~ 20 microns in diameter will be present, although the majority of particles between 20 and 50 microns will be deposited at greater distances than those considered.)

Actual sizing and counting of the particles on the selected ten times enlargements was accomplished by the use of a series of gages consisting of four sets of black circular spots of the same magnification, graduated in equal-diameter increments of 5, 10, 30, and 100 microns. These were printed on a sheet of clear plastic so that the largest spot which could be completely inscribed in a given particle area could be determined by superimposition. Thus, all of the particle sizes listed refer to the diameter of the maximum circle which could be inscribed in the projected area of the particle. A preliminary test established that more-consistent results could be achieved using this parameter than the projected diameter, or diameter of the circle equal to the projected area of the particle.

A number of problems arose in connection with the counting procedure: touching particles were difficult to distinguish from single aggregates; particles which were small, thin, translucent, or out of focus were difficult to see against the background; particles falling on area borderlines could not be accurately sized and often had to be eliminated; some elongated particles, for which the inscribed-circle method was of questionable validity, were observed; a strong tendency existed to overlook particles smaller than about 60 microns, because of the graininess of the print and natural human error. Most of these problems were alleviated, however, by having each print processed in advance by a specially trained editor. All particles to be counted were first marked by the editor, then sized by the counter.

Once the basic data, consisting of the number of particles in each arbitrary size interval between 50 and 2,600 microns, were obtained for the selected trays, they were normalized to a 1-micron interval and smoothed, to compensate in part for sample sparsity, by successive applications of a standard smoothing function on a digital computer. These, with appropriate unit conversions, are the results listed in Tables B.3 and B.5: the numbers of particles, within a 1-micron interval centered at the indicated sizes, collected per hour for each square foot of surface.

Figures 3.6 through 3.9 show how the concentration of each particle size varied over the buildup period by providing, in effect, successive frequency distributions on time-line sections. The curves representing the 92.5- and 195-micron particles have been emphasized to bring out overall trends and make the figures easier to use. Measures of central tendency have been avoided, because the largest particles which make the most-significant contribution to the activity are not significantly represented in the calculation of the mean particle size, while the small particles which make the greatest contribution in the calculation of the mean particle size are most subject to errors from counting and background dust deposits. It should also be remembered that sampling bias is present and probably assumes its greatest importance for the small particles.

Plots of pure background collections for the ship and barge stations resemble the plot of the YAG 39 data for Shot Zuni, but without the marked peaks in the small particles or the intrusions of the large particles from below, both of which are characteristic of fallout arrival. This is not necessarily true for the Howland station, however, where such features may result from disturbances of the surface dust; the series of peaks at about 4 hours during Shot Zuni, for example, appears to be the result of too close an approach by a survey helicopter.

3.2.5 Ocean Penetration. Figure 3.10 shows the general penetration behavior of fallout activity in the ocean for Shot Navajo, a water-surface shot, and Shot Tewa, resembling a land-surface shot. These simplified curves show a number of successive activity profiles measured during and after the fallout period with the oceanographic probe (SIO-P) aboard the YAG 39 and demonstrate the changing and variable nature of the basic phenomena. The best estimates of the rate at which the main body of activity penetrated at the YAG 39 and YAG 40 locations during Shots Flathead, Navajo, and Tewa are summarized in Table 3.3, and the depths at which this penetration was observed to cease are listed in Table 3.4. The data from which the results were obtained are presented in graphical form in Figure B.1; reduced-activity profiles similar to those shown in Figure 3.10 were used in the preparation of the plots. Estimates of the maximum penetration rates observed for Shots Zuni, Navajo, and Tewa appear in Table 3.5.

The values tabulated in Reference 20 represent the result of a systematic study of measured profiles for features indicative of penetration rate. Various shape characteristics, such as the depth of the first increase in activity level above normal background and the depth of the juncture of the gross body of activity with the thin body of activity below, were considered; but none was found to be applicable in every case.

The concept of equivalent depth was devised so that: (1) all the profile data (i. e., all the curves giving activity concentration as a function of depth) could be used, and (2) the results of the Project 2.63 water-sampling effort could be related to other Program 2 studies, in which the determination of activity per unit volume of water near the surface (surface concentration) was a prime measurement. The equivalent depth is defined as the factor which must be applied to the surface concentration to give the total activity per unit water surface area as represented by the measured profile. Because the equivalent depth may be determined by dividing the planimetered area of any profile by the appropriate surface concentration, it is relatively independent of profile shape and activity level and, in addition, can utilize any measure of surface concentration which can be adjusted to the time when the profile was taken and expressed in the same units of activity measurement. Obviously, if the appropriate equivalent depth can be determined, it may be applied to any measurement of the surface concentration to produce an estimate of the activity per unit area when no other data are available.

The penetration rates in Table 3.3 were obtained by plotting all equivalent-depth points avail-

able for each ship and shot (Figure B.1), dividing the data into appropriate intervals on the basis of the plots, and calculating the slopes of the least-squares lines for these intervals. The maximum depths of penetration listed in Table 3.4 were derived from the same plots by establishing that the slopes did not differ significantly from zero outside of the selected intervals. Erratic behavior or failure of the probes on both ships during Shot Zuni and on the YAG 40 during Shot Flathead prevented the taking of data which could be used for equivalent-depth determinations. It did prove possible in the former case, however, to trace the motion of the deepest tip of the activity profile from the YAG 39 measurements; and this is reported, with corresponding values from the other events, as a maximum penetration rate in Table 3.5.

It is important to emphasize that the values given in Tables 3.3 and 3.4, while indicating remarkably uniform penetration behavior for the different kinds of events, refer only to the gross body of the fallout activity as it gradually settles to the thermocline. When the deposited material consists largely of solid particles, as for Shots Zuni and Tewa, it appears that some fast penetration may occur. The rates listed for these shots in Table 3.5 were derived from a fast-traveling component which may have disappeared below the thermocline, leaving the activity profile open at the bottom (Figure 3.10). On the other hand, no such penetration was observed for Shot Flathead and was questionable in the case of Shot Navajo. This subject is discussed further in Section 4.3.2, and estimates of the amount of activity disappearing below the thermocline are presented.

It is also important to note that the linear penetration rates given in Table 3.3 apply only from about the time of peak onward and after the fallout has penetrated to a depth of from 10 to 20 meters. Irregular effects at shallower depths, like the scatter of data points in the vicinity of the thermocline, no doubt reflect the influence both of differences in fallout composition and uncontrollable oceanographic variables. The ships did move during sampling and may have encountered nonuniform conditions resulting from such localized disturbances as thermal gradients, turbulent regions, and surface currents.

In addition to penetration behavior, decay and solubility effects are present in the changing activity profiles of Figure 3.10. The results of the measurements made by the decay probe (SIO-D) suspended in the tank filled with ocean water aboard the YAG 39 are summarized in Table 3.6. Corresponding values from Reference 15 are included for comparison; although similar instrumentation was used, these values were derived from measurements made over slightly different time intervals in contaminated water taken from the ocean some time after fallout had ceased.

Two experiments were performed to study the solubility of the activity associated with solid fallout particles and give some indication of the way in which activity measurements made with energy-dependent instruments might be affected. Several attempts were also made to make direct measurements of the gamma-energy spectra of water samples, but only in one case (Sample YAG 39-T-IC-D, Table B.20) was there enough activity present in the aliquot.

The results of the experiments are summarized in Figures 3.11 and 3.12. Two samples of particles from Shot Tewa, giving $4\text{-}\pi$ ionization chamber readings of 208×10^{-9} and 674×10^{-8} ma respectively, were removed from a single OCC tray (YAG 39-C-34 TE) and subjected to measurements designed to indicate the solubility rates of various radionuclides in relation to the overall solubility rate of the activity in ocean water.

The first sample (Method I) was placed on top of a glass-wool plug in a short glass tube. A piece of rubber tubing connected the top of this tube to the bottom of a 10-ml microburet filled with sea water. The sea water was passed over the particles at a constant rate, and equivolume fractions were collected at specified time intervals. In 23 seconds, 3 ml passed over the particles, corresponding to a settling rate of 34 cm/min—approximately the rate at which a particle of average diameter in the sample (115 microns) would have settled. The activity of each fraction was measured with the well counter soon after collection and, when these measurements were combined with the total sample activity, the cumulative percent of the activity dissolved was computed (Figure 3.11). Gamma-energy spectra were also measured on fractions corresponding roughly to the beginning (10 seconds), middle (160 seconds) and end (360 seconds) of the run (Figure 3.12). The time of the run was D+5 days.

On D+4 the second sample (Method II) was placed in a vessel containing 75 ml of sea water. After stirring for a certain time interval, the solution was centrifuged and a 50- λ aliquot removed from the supernate. This procedure was repeated several times over a 48-hour period, with the activity of each fraction being measured shortly after separation and used to compute the cumulative percent of the total activity in solution (Figure 3.11). The gamma spectrum of the solution stirred for 48 hours was also measured for comparison with the spectra obtained by Method I (Figure 3.12).

As indicated in Figure 3.11, more than 1 percent of the total activity went into solution in less than 10 seconds, followed by at least an additional 19 percent before equilibrium was achieved. This was accompanied by large spectral changes, indicating marked radionuclide fractionation (Figure 3.12); nearly all of the I^{131} , for example, appears to have been dissolved in 360 seconds.

The dip-counter activities of all water samples taken by Projects 2.63 and 2.62a are tabulated in Table B.32. Ocean background corrections have not been attempted but may be estimated for each shot at the YAG 39 and YAG 40 locations from the activities of the background samples collected just prior to the arrival of fallout. All other corrections have been made, however, including those required by the dilution of the designated 1,100-ml depth samples to the standard 2,000-ml counting volume. Normalized dip-counter decay curves for each event (Figure B.14), and the records of the surface-monitoring devices (NYO-M, Figures B.8 through B.13) are also included in Section B.4.

3.3 PHYSICAL, CHEMICAL, AND RADIOCHEMICAL CHARACTERISTICS

3.3.1 Solid Particles. All of the active fallout collected during Shot Zuni, and nearly all collected during Shot Tewa, consisted of solid particles which closely resembled those from Shot M during Operation Ivy and Shot 1 during Operation Castle (References 21 and 22). Alternate trays containing greased disks for solid-particle collection and reagent films for slurry-particle collection were used in the IC's during Shot Tewa. Microscopic examination of the latter revealed an insignificant number of slurry particles; these results are summarized in Table B.10. No slurry particles were observed in the Zuni fallout, although a small number may have been deposited.

As illustrated in Figure 3.13, the particles varied from unchanged irregular grains of coral sand to completely altered spheroidal particles or flaky agglomerates, and in a number of cases included dense black spheres (Reference 19). Each of these types is covered in the discussion of physical, chemical, radiochemical, and radiation characteristics which follows. Basic data for about 100 particles from each shot, selected at random from among those removed from the SIC trays in the YAG 40 laboratory, are included in Table B.34.

Physical and Chemical Characteristics. A number of irregular and spheroidal particles collected on the YFNB 29 during Shots Zuni and Tewa were thin-sectioned and studied under a petrographic microscope (Reference 23); some from Shot Zuni were also subjected to X-ray diffraction analysis (Table 3.7). Typical thin sections of both types of particles are presented in Figures 3.14, 3.15 and 3.16 for Shot Zuni and Figures 3.17 and 3.18 for Shot Tewa. Although the particles shown in the figures were taken from samples of close-in fallout, those collected 40 miles or more from the shot point by the SIC on the YAG 40 were observed to be similar, except for being smaller in size.

Both methods of analysis showed the great majority of irregular particles to consist of fine-grained calcium hydroxide, $\text{Ca}(\text{OH})_2$, with a thin surface layer of calcium carbonate, CaCO_3 (Figure 3.17). A few, however, had surface layers of calcium hydroxide with central cores of unchanged coral (CaCO_3), and an even smaller number were composed entirely of unchanged coral (Figure 3.14). It is likely that the chemically changed particles were formed by decarbonation of the original calcium carbonate to calcium oxide followed by hydration to calcium hydroxide and subsequent reaction with CO_2 in the atmosphere to form a thin coat of calcium carbonate. Particles of this kind were angular in appearance and unusually white in color (Figure 3.13, A and G).

Many of the irregular particles from Shot Zuni were observed to carry small highly active

spherical particles 1 to 25 microns in diameter on their surfaces (Figures 3.13G and 3.15). Shot Tewa particles were almost entirely free from spherical particles of this kind, although a few with diameters less than 1 micron were discovered when some of the irregular particles were powdered and examined with an electron microscope. A few larger isolated spherical particles were also found in the Zuni fallout (Figures 3.13, B and H). Such particles varied in color from orange-red for the smallest sizes to opaque black for the largest sizes.

While these particles were too small to be subjected to petrographic or X-ray diffraction analysis, it was possible to analyze a number of larger particles collected during Shot Inca which appeared to be otherwise identical (Figure 3.19). The Inca particles were composed primarily of Fe_3O_4 and calcium iron oxide ($2\text{CaO}\cdot\text{Fe}_2\text{O}_3$) but contained smaller amounts of Fe_2O_3 and CaO . Some were pure iron oxide but the majority contained calcium oxide in free form or as calcium iron oxide (Reference 24).

Most of the spheroidal particles consisted of coarse-grained calcium hydroxide with a thin surface layer of calcium carbonate (Figure 3.16). Nearly all contained at least a few grains of calcium oxide, however, and some were found to be composed largely of this material (Figure 3.18)—5 to 75 percent by volume. Although melted, particles of this kind probably underwent much the same chemical changes as the irregular particles, the principal difference being that they were incompletely hydrated. They varied in appearance from irregular to almost perfect spheres and in color from white to pale yellow (Figure 3.13, C, H, and K). Many had central cavities, as shown in Figure 3.16 and were in some cases open on one side.

Because of their delicacy, the agglomerated particles could not be thin-sectioned and had to be crushed for petrographic and X-ray diffraction analysis. They were found to be composed primarily of calcium hydroxide and some calcium carbonate. It has been observed that similar particles are formed by the expansion of calcium oxide pellets placed in distilled water, and that the other kinds of fallout particles sometimes change into such aggregates if exposed to air for several weeks. The particles were flaky in appearance, with typical agglomerated structures, and a transparent white in color (Figure 3.13, D, I, and J); as verified by examination of IC trays in the YAG 40 laboratory immediately after collection, they were deposited in the forms shown.

The densities of 71 yellow spheroidal particles, 44 white spheroidal particles, and 7 irregular particles from Shot Zuni were determined (Reference 25) using a density gradient tube and a bromoform-bromobenzene mixture with a range from 2.0 to 2.8 gm/cm^3 . These results, showing a clustering of densities at 2.3 and 2.7 gm/cm^3 , are summarized in Table 3.8. The yellow spheres are shown to be slightly more dense than the white, and chemical spot tests made for iron gave relatively high intensities for the former with respect to the latter. No density determinations were made for agglomerated particles, but one black spherical particle (Table 3.7) was weighed and calculated to have a density of 3.4 gm/cm^3 .

The subject of size distribution has been covered separately in Section 3.2.4, and all information on particle sizes is included in that section.

Radiochemical Characteristics. Approximately 30 irregular, spheroidal and agglomerated particles from Shot Zuni were subjected to individual radiochemical analysis (Reference 26), and the activities of about 30 more were assayed in such a way that certain of their radiochemical properties could be inferred. A number of particles of the same type were also combined in several cases so that larger amounts of activity would be available. These data are tabulated in Tables B.7 and B.8.

Radiochemical measurements of Sr^{89} , Mo^{99} , Ba^{140} - La^{140} and Np^{239} were made. (All classified information such as the product/fission ratio for Np^{239} , which could not be included in Reference 26, and the limited amount of data obtained for Shots Tewa and Flathead were received in the form of a private communication from the authors of Reference 26.) For the most part, conventional methods of analysis (References 27 and 28) were used, although the amounts of Np^{239} and Mo^{99} (actually $\text{Tc}^{99\text{m}}$) were determined in part from photopeak areas measured on the single-channel gamma analyzer (Section 2.2 and Reference 29). The total number of fissions in each sample was calculated from the number of atoms of Mo^{99} present, and radiochemical results were expressed as R-values using Mo^{99} as a reference. (R-values, being defined as the ratio

of the observed amount of a given nuclide to the amount expected from thermal neutron fission of U^{235} , relative to some reference nuclide, combine the effects of fractionation and variations in fission yield and contain a number of experimental uncertainties. Values between 0.5 and 1.5 cannot be considered significantly different from 1.0.) Selected particles were also weighed so that the number of fissions per gram could be computed.

Radioactivity measurements were made in the gamma well counter (WC) and the $4-\pi$ gamma ionization chamber (GIC), both of which are described in Section 2.2. Because the efficiency of the former decreased with increasing photon energy, while the efficiency of the latter increased, samples were often assayed in both instruments and the ratio of the two measurements (counts per minute per 10^4 fissions to milliamperes per 10^4 fissions) used as an indication of differences in radionuclide composition.

It will be observed that the particles in Table B.7 have been classified according to color and shape. For purposes of comparing radiochemical properties, spheroidal and agglomerated particles have been grouped together and designated as "altered particles," while irregular particles have been designated "unaltered particles." The latter should not be interpreted literally, of course; it will be evident from the foregoing section that the majority of irregular particles have undergone some degree of chemical change. Particles were classified as altered if they exhibited the obvious physical changes of spheroidal or agglomerated particles under the optical microscope.

Radiochemical results for all altered and unaltered particles from Shot Zuni are summarized in Table 3.9, and activity ratios of the particles from this shot and Shot Tewa are compared in Table 3.10. The differences in radiochemical composition suggested in the tables are emphasized in Figure 3.20, which shows how the energy-dependent ratios (counts per minute per 10^4 fissions, milliamperes per 10^4 fissions and counts per minute per milliamperes) varied with time, and in Figure 3.21, wherein the data used for computing the R-values and product/fission (p/f) ratios (number of atoms of induced product formed per fission) in Tables B.7 and B.8 are presented graphically by plotting the numbers of atoms of each nuclide in a sample versus the number of atoms of Mo^{99} . Data obtained from calibration runs with neutron-irradiated U^{235} are plotted in the former for comparison; and the standard cloud sample data for Np^{239} , as well as those derived from the estimated device fission yields for Ba^{140} and Sr^{89} , are included in the latter.

It is interesting to note that these results not only establish that marked differences exist between the two types of particles, but also show the altered particles to be depleted in both Ba^{140} - La^{140} and Sr^{89} , while the unaltered particles are enriched in Ba^{140} - La^{140} and perhaps slightly depleted in Sr^{89} . The altered particles are also seen to be about a factor of 100 higher than the unaltered in terms of fissions per gram. When these R-values are compared with those obtained from gross fallout samples (Tables 3.17 and 3.21), it is further found that the values for altered particles resemble those for samples from the lagoon area, while the values for the unaltered particles resemble those from cloud samples.

Activity Relationships. All of the particles whose gamma activities and physical properties were measured in the YAG 40 laboratory (Table B.34), as well as several hundred additional particles from the incremental collectors on the other ships and barges, were studied systematically (Reference 30) in an attempt to determine whether the activities of the particles were functionally related to their size. These data are listed in Table B.9 and the results are plotted in Figures 3.22 and 3.23. Possible relationships between particle activity, weight, and density were also considered (Reference 25), using a separate group of approximately 135 particles collected on the YFNB 29 during Shots Zuni and Tewa and the YAG 39 during Shot Tewa only; Figures 3.24 and 3.25 show the results.

As implied by the differences in radiochemical composition discussed in the preceding section, marked differences exist in the gamma-radiation characteristics of the different types of particles. Compared with the variations in decay rate and energy spectrum observed for different particles collected at about the same time on the YAG 40 (Figures B.2, B.3 and B.4), altered particles show large changes relative to unaltered particles. Figures 3.26 and 3.27 from Reference 28 illustrate this point. The former, arbitrarily normalized at 1,000 hours, shows how

well-counter decay rates for the two types of particles deviate on both sides of the interval from 200 to 1,200 hours, and how the same curves fail to coincide, as they should for equivalent radionuclide compositions, when plotted in terms of 10^4 fissions. The latter shows the regions in which the primary radionuclide deficiencies exist.

The previous considerations suggest that particles should be grouped according to type for the study of activity-size relationships.

Figures 3.22 and 3.23 show the results of a study made in this way (Table B.9). A large number of the particles for which size and activity data were obtained in the YAG 40 laboratory during Shots Zuni and Tewa were first grouped according to size (16 groups, about 32 microns wide, from 11 to 528 microns), then subdivided according to type (irregular or angular, spheroidal or spherical, and agglomerated) within each size group. The distribution of activities in each size group and subgroup was considered and it was found that, while no regular distribution was apparent for the size group, the subgroup tended toward normal distribution. Median activities were utilized for both, but maximum and minimum values for the overall size group were included in Table B.9 to show the relative spread. It will be observed that activity range and median activity both increase with size.

Similar results for groups of particles removed from IC trays exposed aboard the YAG 39, LST 611, YFNB 13, and YFNB 29 during Shot Tewa are also included in Table B.9. These have not been plotted or used in the derivation of the final relationships, because the particles were removed from the trays and well-counted between 300 and 600 hours after the shot, and many were so near background that their activities were questionable. (This should not be interpreted to mean that the fallout contained a significant number of inactive particles. Nearly 100 percent of the particles observed in the YAG 40 laboratory during Shots Zuni and Tewa were active.)

In the figures, the median activity of each size group from the two sets of YAG 40 data has been plotted against the mean diameter of the group for the particles as a whole and several of the particle type subgroups. Regression lines have been constructed, using a modified least-squares method with median activities weighted by group frequencies, and 95-percent-confidence bands are shown in every case. Agglomerated particles from Shot Zuni and spheroidal particles from Shot Tewa have not been treated because of the sparsity of the data.

It should also be noted that different measures of diameter have been utilized in the two cases. The particles from both shots were sized under a low-power microscope using eyepiece micrometer disks; a series of sizing circles was used during Shot Zuni, leading to the diameter of the equivalent projected area D_a , while a linear scale was used for Shot Tewa, giving simply the maximum particle diameter D_m . The first method was selected because it could be applied under the working conditions in the YAG 40 laboratory and easily related to the method described in Section 3.2.4 (Figure B.5); the second method was adopted so that more particles could be processed and an upper limit established for size in the development of activity-size relationships.

The equations for the regression lines are given in the figures and summarized as follows: all particles, Shot Zuni, $A \propto D_a^{2.4}$, Shot Tewa, $A \propto D_m^{1.8}$; irregular particles, Shot Zuni, $A \propto D_a^{2.2}$, Shot Tewa, $A \propto D_m^{1.7}$; spheroidal particles, Shot Zuni, $A \propto D_a^{3.7}$; and agglomerated particles, Shot Tewa, $A \propto D_m^{2.1}$.

(Analogous relationships for Tewa particles from the YFNB 29 were derived on the basis of much more limited data in Reference 25, using maximum diameter as the measure of size. These are listed below; error not attributable to the linear regression was estimated at about 200 percent for the first two cases and 400 percent for the last: all particles, $A \propto D_m^{2.01}$; irregular particles, $A \propto D_m^{1.92}$; and spheroidal particles, $A \propto D_m^{3.37}$.)

It may be observed that the activity of the irregular particles varies approximately as the square of the diameter. This is in good agreement with the findings in Reference 23; the radioautographs in Figures 3.14 and 3.17 show the activity to be concentrated largely on the surfaces of the irregular particles. The activity of the spheroidal particles, however, appears to vary as the third or fourth power of the diameter, which could mean either that it is a true function of particle volume or that it diffused into the molten particle in a region of higher activity concentration in the cloud. The thin-section radioautographs suggest the latter to be true, showing the activity to be distributed throughout the volume in some cases (Figure 3.16) but confined to

the surface in others (Figure 3.18). It may also be seen that the overall variation of activity with size is controlled by the irregular particles, which appear to predominate numerically in the fallout (Table B.9), rather than by the spheroidal particles. Table 3.11 illustrates how the activity in each size group was divided among the three particle types.

No correlation of particle activity with density was possible (Figure 3.25) but a rough relationship with weight was derived for a group of Tewa particles from the YFNB 29 on the basis of Figure 3.24: $A \propto W^{0.7}$, where W refers to the weight in micrograms and nonregression error is estimated at ~ 140 percent (Reference 25). (An additional study was performed at NRDL, using 57 particles from the same source and a more stable microbalance. The resulting relation was: $A \propto W^{0.57}$.) This result is consistent with the diameter functions, because $D^3 \propto W^{2/3}$. The relative activities of the white and yellow spheroidal particles referred to earlier were also compared and the latter were found to be slightly more active than the former.

3.3.2 Slurry Particles. All of the fallout collected during Shots Flathead and Navajo consisted of slurry particles whose inert components were water, sea salts, and a small amount of insoluble solids. (Although IC and SIC trays containing greased disks were interspersed among those containing reagent films for shots, no isolated solid particles that were active were observed.) Large crystals displaying the characteristic cubic shape of sodium chloride were occasionally observed in suspension. The physical and chemical, radiochemical, and radiation characteristics of these particles are discussed below. Table B.35 contains representative sets of data, including data on particles collected on the YAG 40 and at several other stations during each shot.

Physical and Chemical Characteristics. Slurry particles have been studied extensively and are discussed in detail in Reference 31. The results of preliminary studies of the insoluble solids contained in such particles are given in Reference 32. Figure 3.28 is a photomicrograph of a typical deposited slurry droplet, after reaction with the chloride-sensitive reagent film surface. The chloride-reaction area appears as a white disk, while the trace or impression of the impinging drop is egg shaped and encloses the insoluble solids. The concentric rings are thought to be a Liesegang phenomenon. An electronmicrograph of a portion of the solids is shown in Figure 3.29, illustrating the typical dense agglomeration of small spheres and irregular particles.

The physical properties of the droplets were established in part by microscopic examination in the YAG 40 laboratory soon after their arrival, and in part by subsequent measurements and calculations. For example, the dimensions of the droplets that appeared on the greased trays provided a rapid approximation of drop diameter, but the sphere diameters reported in Table 3.12 were calculated from the amount of chloride (reported as NaCl equivalent) and H_2O measured later from the reagent films. It will be noted that particle size decreased very slowly with time; and that for any given time period, size distribution need not be considered, because standard deviations are small. Average densities for the slurry particles, calculated from their dimensions and the masses of NaCl and H_2O present, are also given in Table 3.12.

On the basis of the data in Table 3.12, and a calibration method for solids volume that involved the collection on reagent film of simulated slurry droplets containing aluminum oxide suspensions of appropriate diameter at known concentrations, it was estimated that the particles were about 80 percent NaCl, 18 percent H_2O , and 2 percent insoluble solids by volume. The latter were generally amber in color and appeared under high magnification (Figure 3.29) to be agglomerates composed of irregular and spherical solids ranging in size from about 15 microns to less than 0.1 micron in diameter. The greatest number of these solids were spherical and less than 1 micron in diameter, although a few were observed in the size range from 15 to 60 microns.

Chemical properties were determined by chloride reagent film, X-ray diffraction, and electron diffraction techniques. (The gross chemistry of slurry drops is of course implicit in the analyses of the OCC collections from Shots Flathead and Navajo (Table B.18); no attempt has been made to determine the extent of correlation.) The first featured the use of a gelatin film containing colloidal red silver dichromate, with which the soluble halides deposited on the film

react when dissolved in saturated, hot water vapor. The area of the reaction disk produced, easily measured with a microscope, is proportional to the amount of NaCl present (Reference 33). The values of NaCl mass listed in Table 3.12 were obtained by this method; the values of H₂O mass were obtained by constructing a calibration curve relating the volume of water in the particle at the time of impact to the area of its initial impression, usually well defined by the insoluble solids trace (Figure 3.28). Because the water content of slurry fallout varies with atmospheric conditions at the time of deposition, mass is expressed in terms of the amount of NaCl present; the weight of water may be estimated by multiplying the NaCl mass by 1.2, the average observed factor.

Conventional X-ray diffraction methods were used for qualitative analysis of the insoluble solids, stripped from the reagent film by means of an acrylic spray coating, and they were found to consist of calcium iron oxide (2 CaO·Fe₂O₃), oxides of calcium and iron, and various other compounds (Table 3.13). Some of these were also observed by electron diffraction.

Radiochemical Characteristics. Thirteen of the most-active slurry particles removed from the SIC trays in the YAG 40 laboratory during Shot Flathead were combined (Reference 26), and analyzed radiochemically in much the same way as the solid particles described earlier in Section 3.3.1. The sample was assayed in the gamma well counter (WC) and the 4- π gamma ionization chamber (GIC), then analyzed for Mo⁹⁹, Ba¹⁴⁰-La¹⁴⁰, Sr⁸⁹, and Np²³⁹; total fissions, activity ratios, R-values and the product/fission ratio were computed as before. The results are presented in Table 3.14.

It may be seen that the product/fission ratio and R⁹⁹(89) value are comparable with the values obtained for gross fallout samples (Tables 3.17, 3.18, and 3.21), and that the overall radionuclide composition resembles that of the unaltered solid particles. Slight depletion of both Ba¹⁴⁰-La¹⁴⁰ and Sr⁸⁹ is indicated.

Activity Relationships. Since the mass of slurry-particle fallout was expressed in terms of NaCl mass, it was decided to attempt to express activity relationships in the same terms. This was accomplished in two steps. First, the H+12-hours well-counter activities measured on the IC trays from the majority of the stations listed in Table 3.12 were summed to arrive at the total amounts of activity deposited per unit area (counts per minute per square foot). These values were then divided by the average specific activity calculated for each station (counts per minute per microgram NaCl) to obtain the total amount of NaCl mass deposited per unit area (micrograms NaCl per square foot). Results for Shot Flathead are plotted in Figure 3.30, and numerical values for both shots are tabulated in Table B.11; the Navajo results were not plotted because of insufficient data. (Figure 3.30 and Table B.11 have been corrected for recently discovered errors in the tray activity summations reported in Reference 31.)

While this curve may be used to estimate the amount of activity associated with a given amount of slurry-fallout mass in outlying areas, it must be remembered that the curve is based on average specific activity. It should also be noted that the unusually high values of NaCl mass obtained for the YFNB 29 during Shot Flathead have not been plotted. A correspondingly high value for the YFNB 13 during Shot Navajo appears in the table. These were felt to reflect differences in composition which are not yet well understood.

A preliminary effort was also made to determine the way in which the activity of slurry particles was divided between the soluble and insoluble phases. As illustrated in Figure 3.31, radioautographs of chloride reaction areas on reagent films from all of the Flathead collections and a few of the Navajo shipboard collections indicated that the majority of the activity was associated with the insoluble solids. This result was apparently confirmed when it was found that 84 percent of the total activity was removable by physical stripping of the insoluble solids; however, more careful later studies (private communication from N. H. Farlow, NRDL) designed to establish the amount of activity in solids that could not be stripped from the film, and the amount of dissolved activity in gelatin removed with the strip coating, decreased this value to 65 percent. It must be noted that the stripping process was applied to a Flathead sample from the YAG 40 only, and that solubility experiments on OCC collections from other locations at Shot Navajo (Reference 32) indicated the partition of soluble-insoluble activity may vary with collector location or time of arrival. The latter experiments, performed in duplicate, yielded

average insoluble percentages of 93 and 14 for the YAG 39 (two aliquots) and the YFNB 13 respectively.

While such properties of barge shot fallout as the slurry nature of the droplets, diameters, densities, and individual activities have been adequately measured, it is evident that more extensive experimentation is required to provide the details of composition of the solids, their contribution to the weight of the droplets, and the distribution of activity within the contents of the droplets.

3.3.3 Activity and Fraction of Device. An estimate of the total amount of activity deposited at every major and minor station during each shot is listed in Table 3.15. Values are expressed both as fissions per square foot and fraction of device per square foot for convenience. In the case of the major stations the weighted mean and standard deviation of measurements made on the four OCC's and two AOC₁'s on the standard platform are given, while the values tabulated for the minor stations represent single measurements of AOC₂ collections. Basic data for both cases are included in Tables B.12 and B.14. (Tray activities were found to pass through a maximum and minimum separated by about 180 degrees when plotted against angular displacement from a reference direction; ten values at 20-degree intervals between the maximum and minimum were used to compute the mean and standard deviation (Section 4.3.2).)

The number of fissions in one OCC tray from each major station and one standard cloud sample was determined by radiochemical analysis for Mo⁹⁹ after every shot (Reference 34). Because these same trays and samples had previously been counted in the doghouse counter (Section 2.2), the ratio of doghouse counts per minute at 100 hours could then be calculated for each shot and location, as shown in Table B.13, and used to determine the number of fissions in the remaining OCC trays (fissions per 2.60 ft², Table B.12). Final fissions per square foot values were converted to fraction of device per square foot by means of the fission yields contained in Table 2.1 and use of the conversion factor 1.45×10^{26} fissions/Mt (fission). (Slight discrepancies may be found to exist in fraction of device values based on Mo⁹⁹, because only interim yields were available at the time of calculation.)

Aliquots from some of the same OCC trays analyzed radiochemically for Mo⁹⁹ were also measured on the dip counter. Since the number of fissions in the aliquots could be calculated and the fallout from Shots Flathead and Navajo was relatively unfractionated, the total number of fissions in each AOC₂ from these shots could be computed directly from their dip-counter activities using a constant ratio of fissions per dip counts per minute at 100 hours. Table B.14I gives the results.

Shot Zuni, and to a lesser extent Shot Tewa, fallout was severely fractionated, however, and it was necessary first to convert dip-counter activities to doghouse-counter activities, so that the more-extensive relationships between the latter and the fissions in the sample could be utilized. With the aliquot measurements referred to above, an average value of the ratio of doghouse activity per dip-counter activity was computed (Table B.15), and this used to convert all dip counts per minute at 100 hours to doghouse counts per minute at 100 hours (Table B.14II). The most appropriate value of fissions per doghouse counts per minute at 100 hours was then selected for each minor station, on the basis of its location and the time of fallout arrival, and the total number of fissions calculated for the collector area, 0.244 ft². Final fission per square foot values were arrived at by normalizing to 1 ft², and fraction of device per square foot was computed from the total number of device fissions as before.

Many of the results presented in this report are expressed in terms of 10⁴ fissions. For example, all gamma- and beta-decay curves in Section 3.4 (Figures 3.34 to 3.38) are plotted in units of counts per second per 10⁴ fissions, and the final ionization rates as a function of time for each shot (Figure 3.39) are given in terms of roentgens per hour per 10⁴ fissions per square foot. Thus, the estimates in Table 3.15 are all that is required to calculate the radiation intensities which would have been observed at each station under ideal conditions any time after the cessation of fallout. It should be noted, however, that the effects of sampling bias have not been entirely eliminated from the tabulated values and, consequently, will be reflected in any quantity determined by means of them. Even though the use of weighted-mean collector values for the

major stations constitutes an adjustment for relative platform bias, the question remains as to what percent of the total number of fissions per unit area, which would have been deposited in the absence of the collector, were actually collected by it. This question is considered in detail in Section 4.3.2.

3.3.4 Chemical Composition and Surface Density. The total mass of the fallout collected per unit area at each of the major stations is summarized for all four shots in Table 3.16. Results are further divided into the amounts of coral and sea water making up the totals, on the assumption that all other components in the device complex contributed negligible mass. These values were obtained by conventional quantitative chemical analysis of one or more of the OCC tray collections from each station for calcium, sodium, chlorine, potassium, and magnesium (References 35 through 38); in addition analyses were made for iron, copper and uranium (private communication from C. M. Callahan and J. R. Lai, NRDL). The basic chemical results are presented in Tables B.16 and B.18. (Analyses were also attempted for aluminum and lead; possibly because of background screening, however, they were quite erratic and have not been included.)

The chemical analysis was somewhat complicated by the presence in the collections of a relatively large amount of debris from the fiberglass honeycomb (or hexcell) inserts, which had to be cut to collector depth and continued to spall even after several removals of the excess material. It was necessary, therefore, to subtract the weight of the fiberglass present in the samples in order to arrive at their gross weights (Table B.18I). The weight of the fiberglass was determined in each case by dissolving the sample in hydrochloric acid to release the carbonate, filtering the resultant solution, and weighing the insoluble residue. In addition, the soluble portion of the resin binder was analyzed for the elements listed above and subtracted out as hexcell contribution to arrive at the gross amounts shown (References 39 and 40). Aliquots of the solution were then used for the subsequent analyses.

It was also necessary to subtract the amount of mass accumulated as normal background. These values were obtained by weighing and analyzing samples from a number of OCC trays which were known to have collected no fallout, although exposed during the fallout period. Many of the trays from Shot Cherokee, as well as a number of inactive trays from other shots, were used; and separate mean weights with standard deviations were computed for each of the elements under ocean and land collection conditions (Tables B.16 and B.18).

After the net amount of each element due to fallout was determined, the amounts of original coral and sea water given in Table 3.16 could be readily computed with the aid of the source compositions shown in Table B.16. In most cases, coral was determined by calcium; however, where the sea water/coral ratio was high, as for the barge shots, the sea water contribution to the observed calcium was accounted for by successive approximation. Departure from zero of the residual weights of the coral and sea water components shown in Table B.18 reflect combined errors in analyses and compositions. It should be noted that all \pm values given in these data represent only the standard deviation of the background collections, as propagated through the successive subtractions. In the case of Shot Zuni, two OCC trays from each platform were analyzed several months apart, with considerable variation resulting. It is not known whether collection bias, aging, or inherent analytical variability is chiefly responsible for these discrepancies.

The principal components of the device and its immediate surroundings, exclusive of the naturally occurring coral and sea water, are listed in Table B.17. The quantities of iron, copper and uranium in the net fallout are shown in Table B.18I to have come almost entirely from this source. Certain aliquots from the OCC trays used for radiochemical analysis were also analyzed independently for these three elements (Table B.18II). These data, when combined with the tabulated device complex information, allow computation of fraction of device; the calculations have been carried out in Section 4.3.4 for uranium and iron and compared with those based on Mo⁹⁹.

3.4 RADIONUCLIDE COMPOSITION AND RADIATION CHARACTERISTICS

3.4.1 Approach. If the identity, decay scheme, and disintegration rate of every nuclide in

a sample are known, then all emitted particle or photon properties of the mixture can be computed. If, in addition, calibrated radiation detectors are available, then the effects of the sample emissions in those instruments may also be computed and compared with experiment. Finally, air-ionization or dose rates may be derived for this mixture under specified geometrical conditions and concentrations.

In the calculations to follow, quantity of sample is expressed in time-invariant fissions, i.e., the number of device fissions responsible for the gross activity observed; diagnostically, the quantity is based on radiochemically assayed Mo^{99} and a fission yield of 6.1 percent. This nuclide, therefore, becomes the fission indicator for any device and any fallout or cloud sample. The computation for slow-neutron fission of U^{235} , as given in Reference 41, is taken as the reference fission model; hence, any $R^{99}(x)$ values in the samples differing from unity, aside from experimental uncertainty, represent the combined effects of fission kind and fractionation, and necessitate modification of the reference model if it is to be used as a basis for computing radiation properties of other fission-product compositions. (An R-value may be defined as the ratio of the amount of nuclide x observed to the amount expected for a given number of reference fissions. The notation $R^{99}(x)$ means the R-value of mass number x referred to mass number 99.)

Two laboratory instruments are considered: the doghouse counter employing a 1-inch-diameter-by-1-inch-thick $\text{NaI}(\text{Tl})$ crystal detector, and the continuous-flow proportional beta counter (Section 2.2). The first was selected because the decay rates of many intact OCC collections and all cloud samples were measured in this instrument; the second, because of the desirability of checking calculated decay rates independent of gamma-ray decay schemes. Although decay data were obtained on the $4-\pi$ gamma ionization chamber, response curves (Reference 42) were not included in the calculations. However, the calculations made in this section are generally consistent with the data presented in Reference 42. The data obtained are listed in Table B.26.

3.4.2 Activities and Decay Schemes. The activities or disintegration rates of fission products for 10^4 fissions were taken from Reference 41; the disintegration rates are used where a radioactive disintegration is any spontaneous change in a nuclide. Other kinds of activities are qualified, e.g., beta activity. (See Section 3.4.4.) Those of induced products of interest were computed for 10^4 fissions and a product/fission ratio of 1, that is, for 10^4 initial atoms (Reference 43).

Prepublication results of a study of the most-important remaining nuclear constants—the decay schemes of these nuclides—are contained in References 42 and 44. The proposed schemes, which provide gamma and X-ray photon energies and frequencies per disintegration, include all fission products known up to as early as ~45 minutes, as well as most of the induced products required. All of the following calculations are, therefore, limited to the starting time mentioned and are arbitrarily terminated at 301 days.

3.4.3 Instrument Response and Air-Ionization Factors. A theoretical response curve for the doghouse counter, based on a few calibrating nuclides, led to the expected counts/disintegration of each fission and induced product as a function of time, for a point-source geometry and 10^4 fissions or initial atoms (Reference 43). The condensed decay schemes of the remaining induced nuclides were also included. To save time, the photons emitted from each nuclide were sorted into standardized energy increments, 21 of equal logarithmic width comprising the scale from 20 kev to 3.25 Mev. The response was actually computed for the average energy of each increment, which in general led to errors no greater than ~10 percent.

Counting rates expected in the beta counter were obtained from application of the physical-geometry factor to the theoretical total-beta and positron activity of the sample. With a response curve essentially flat to beta E_{max} over a reasonably wide range of energies, it was not necessary to derive the response to each nuclide and sum for the total. Because the samples were essentially weightless point sources, supported and covered by 0.80 mg/cm^2 of plicofilm, scattering and absorption corrections were not made to the observed count rates; nor were gamma-ray contributions subtracted out. Because many of the detailed corrections are self-

canceling, it is assumed the results are correct to within ~20 percent. The geometries (or counts/beta) for Shelves 1 through 5 are given in Section A.2.

Air-ionization rates 3 feet above an infinite uniformly contaminated plane, hereafter referred to as standard conditions (SC), are based on the curve shown in Figure B.6, which was originally obtained in another form in Reference 7. The particular form shown here, differing mainly in choice of parameters and units, has been published in Reference 45. Points computed in Reference 46 and values extracted from Reference 47 are also shown for comparison. The latter values are low, because air scattering is neglected.

The ionization rate (SC) produced by each fission-product nuclide as a function of time for 10^4 reference fissions/ft² (Reference 17), was computed on a line-by-line basis; the induced products appear in Table B.19 for 10^4 fissions/ft² and a product/fission ratio of 1, with lines grouped as described for the doghouse-counter-response calculations.

The foregoing sections provide all of the background information necessary to obtain the objectives listed in the first paragraph of Section 3.4.1, with the exception of the actual radionuclide composition of the samples. The following sections deal with the available data and methods used to approximate the complete composition.

3.4.4 Observed Radionuclide Composition. Radiochemical R-values of fission products are given in Table 3.17 and observed actinide product/fission ratios appear in Table 3.18, the two tables summarizing most of the radiochemistry done by the Nuclear and Physical Chemistry, and Analytical and Standards Branches, NRDL (Reference 34).

The radiochemical results in Reference 34 are expressed as device fractions, using fission yields estimated for the particular device types. These have been converted to R-values by use of the equation:

$$R_{\theta}^{99}(x) = \frac{FOD_E(x)}{FOD(99)} \cdot \frac{FY_E(x)}{FY_{\theta}(x)}$$

Where $R_{\theta}^{99}(x)$ is the R-value of nuclide x relative to Mo^{99} ; $FOD_E(x)$ and $FY_E(x)$ are respectively the device fraction and estimated yield of nuclide x reported in Reference 34, $FY_{\theta}(x)$ is the thermal yield of nuclide x , and $FOD(99)$ is the device fraction by Mo^{99} . The thermal yields used in making this correction were taken from ORNL 1793 and are as follows: Zr⁹⁵, 6.4 percent; Te¹³², 4.4 percent; Sr⁸⁹, 4.8 percent; Sr⁹⁰, 5.9 percent; Cs¹³⁷, 5.9 percent; and Ce¹⁴⁴, 6.1 percent. The yield of Mo^{99} was taken as 6.1 percent in all cases. The R-values for all cloud-sample nuclides were obtained in that form directly from the authors of Reference 34.

Published radiochemical procedures were followed (References 48 through 54), except for modifications of the strontium procedure, and consisted of two $Fe(OH)_3$ and $BaCrO_4$ scavenges and one extra $Sr(NO_3)_2$ precipitation with the final mounting as $SrCO_3$. Table 3.19 lists principally product/fission ratios of induced activities other than actinides for cloud samples; sources are referenced in the table footnotes.

Supplementary information on product/fission ratios in fallout and cloud samples was obtained from gamma-ray spectrometry (Tables B.20 and B.21) and appears in Table 3.20.

3.4.5 Fission-Product-Fractionation Corrections. Inspection of Tables 3.17 through 3.20, as well as the various doghouse-counter and ion-chamber decay curves, led to the conclusion that the radionuclide compositions of Shots Flathead and Navajo could be treated as essentially unfractionated. It also appeared that Shots Zuni and Tewa, whose radionuclide compositions seemed to vary continuously from lagoon to cloud, and probably within the cloud, might be covered by two compositions: one for the close-in lagoon area, and one for the more-distant ship and cloud samples. The various compositions are presented as developed, starting with the simplest. The general method and supporting data are given, followed by the results.

Shots Flathead and Navajo. Where fission products are not fractionated, that is, where the observed $R_{\theta}^{99}(x)$ values are reasonably close to 1 (possible large R-values among low-yield valley and right-wing mass numbers are ignored), gross fission-product properties may

be readily extracted from the sources cited. Induced product contributions may be added in after diminishing the tabular values (product/fission = 1) by the proper ratio. After the resultant computed doghouse-counter decay rate is compared with experiment, the ionization rate (SC) may be computed for the same composition. Beta activities may also be computed for this composition—making allowance for those disintegrations that produce no beta particles. The Navajo composition was computed in this manner, as were the rest of the compositions, once fractionation corrections had been made.

Shot Zuni. A number of empirical corrections were made to the computations for unfractionated fission products in an effort to explain the decay characteristics of the residual radiations from this shot. The lagoon-area composition was developed first, averaging available lagoon area R-values. As shown in Figure 3.32, R-values of nuclides which, in part at least, are decay products of antimony are plotted against the half life of the antimony precursor, using the fission-product decay chains tabulated in Reference 56. (Some justification for the

If the assumptions are made that, after ~45 minutes, the R-values of all members of a given chain are identical, and related to the half life of the antimony precursor, then Figure 3.32 may be used to estimate R-values of other chains containing antimony precursors with different half lives. The R-value so obtained for each chain is then used as a correction factor on the activity (Reference 41) of each nuclide in that chain, or more directly, on the computed doghouse activity or ionization (SC) contribution (Table 3.21). The partial decay products of two other fractionating precursors, xenon and krypton, are also shown in Figure 3.32, and are similarly employed. These deficiencies led to corrections in some 22 chains, embracing 54 nuclides that contributed to the activities under consideration at some time during the period of interest. The R-value of I^{131} was taken as 0.03; a locally measured but otherwise unreported I^{133}/I^{131} ratio of 5.4 yields an I^{133} R-value of 0.16.

Although the particulate cloud composition might have been developed similarly, using a different set of curves based on cloud R-values, it was noticed that a fair relation existed between cloud and lagoon nuclide R-values as shown in Figure 3.33. Here $R^{99}(x)$ cloud/ $R^{99}(x)$ lagoon is plotted versus $R^{99}(x)$ lagoon average. The previously determined lagoon chain R-values were then simply multiplied by the indicated ratio to obtain the corresponding cloud R-values. The dotted lines indicate the trends for two other locations, YAG 39 and YAG 40, although these were not pursued because of time limitations. It is assumed that the cloud and lagoon compositions represent extremes, with all others intermediate. No beta activities were computed for this shot.

Shot Tewa. Two simplifying approximations were made. First, the cloud and outer station average R-values were judged sufficiently close to 1 to permit use of unfractionated fission products. Second, because the lagoon-area fission-product composition for Shot Tewa appeared to be the same as for its Zuni counterpart except in mass 140, the Zuni and Tewa lagoon fission products were therefore judged to be identical, except that the Ba^{140} - La^{140} contribution was increased by a factor of 3 for the latter.

The induced products were added in, using product/fission ratios appropriate to the location wherever possible; however, the sparsity of ratio data for fallout samples dictated the use of cloud values for most of the minor induced activities.

3.4.6 Results and Discussion. Table B.22 is a compilation of the computed doghouse counting rates for the compositions described; these data and some observed decay rates are shown in Figures 3.34 through 3.37. All experimental doghouse-counter data is listed in Table B.23. Table B.24 similarly summarizes the Flathead and Navajo computed beta-counting rates; they are compared with experiment in Figure 3.38, and the experimental data are given in Table B.25. Results of the gamma-ionization or dose rate (SC) calculations for a surface concentration of 10^4 fissions/ft² are presented in Table 3.22 and plotted in Figure 3.39. It should be emphasized that these computed results are intended to be absolute for a specified composition

and number of fissions as determined by Mo⁹⁹ content, and no arbitrary normalization has been employed to match theory and experiment. Thus, the curves in Figure 3.39, for instance, represent the best available estimates of the SC dose rate produced by 10⁴ fissions/ft² of the various mixtures. The Mo⁹⁹ content of each of the samples represented is identical, namely the number corresponding to 10⁴ fissions at a yield of 6.1 percent. The curves are displaced vertically from one another solely because of the fractionation of the other fission products with respect to Mo⁹⁹, and the contributions of various kinds and amounts of induced products.

It may be seen that the computed and observed doghouse-counter decay rates are in fairly good agreement over the time period for which data could be obtained. The beta-decay curves for Shots Flathead and Navajo, initiated on the YAG 40, suggest that the computed gamma and ionization curves, for those events at least, are reasonably correct as early as 10 to 15 hours after detonation.

The ionization results may not be checked directly against experiment; it was primarily for this reason that the other effects of the proposed compositions were computed for laboratory instruments. If reasonable agreement can be obtained for different types of laboratory detectors, then the inference is that discrepancies between computed and measured ionization rates in the field are due to factors other than source composition and ground-surface fission concentration.

The cleared area surrounding Station F at How Island (Figure 2.8) offers the closest approximation to the standard conditions for which the calculations were made, and Shot Zuni was the only event from which sufficient fallout was obtained at this station to warrant making a comparison. With the calculated dose rates based on the average buried-tray value of $2.08 \pm 0.22 \times 10^{14}$ fissions/ft² (Table B.27) and the measured rates from Table B.28, (plotted in Figure B.7), the observed/calculated ratio varies from 0.45 at 11.2 hours to 0.66 from 100 to 200 hours, falling to an average of 0.56 between 370 and 1,000 hours. Although detailed reconciliation of theory and experiment is beyond the scope of this report, some of the factors operating to lower the ratio from an ideal value of unity were: (1) the cleared area was actually somewhat less than infinite in extent, averaging ~120 feet in radius, with the bulldozed sand and brush ringing the area in a horseshoe-shaped embankment some 7 feet high; (2) the plane was not mathematically smooth; and (3) the survey instruments used indicate less than the true ionization rate, i. e., the integrated response factor, including an operator, is lower than that obtained for Co⁶⁰ in the calibrating direction.

It is estimated that, for average energies from 0.15 Mev to 1.2 Mev, a cleared radius of 120 feet provides from ~0.80 to ~0.70 of an infinite field (Reference 46). The Cutie Pie survey meter response, similar to the T1B between 100 kev and 1 Mev, averages about 0.85 (Reference 17). These two factors alone, then, could depress the observed/calculated ratio to ~0.64.

TABLE 3.1 TIMES OF ARRIVAL, PEAK ACTIVITY, AND CESSATION AT MAJOR STATIONS

Time of arrival (t_a) indicates the earliest-reliable arrival time of fallout as determined from the incremental collector and gamma time-intensity recorder results. Time of peak activity (t_p) indicates the time of peak ionization rate (in parentheses) and the times during which the ionization rate was within 10 percent of the peak rate. I_p refers to the peak ionization rate. Time of cessation (t_c) indicates, first, the time by which 95 percent of the fallout had been deposited and, next, the extrapolated time of cessation.

Shot	Station	t_a	t_p		I_p	t_c	
		TSD, hr	TSD, hr		r/hr	TSD, hr	
Flathead	YAG 40 (A, B)	8.0	12	(17.0)	20	0.259	22 to 23
	YAG 39 (C)	4.5	10	(11.0)	13	0.141	13 to 15
	LST 611 (D)	6.6	9.0	(9.1)	9.2	0.098	20 to 25
	YFNB 13 (E)	0.35	1.1	(1.3)	1.5 *	21.8 *	2.0 to †
	YFNB 29 (G, H)	0.62	1.2	(1.52)	1.9	0.98	1.5 to 9.0
	How Island (F)	‡	‡	‡	‡	‡	‡
Navajo	YAG 40 (A, B)	6.0	11	(12.3)	13	0.129	16 to 20
	YAG 39 (C)	2.3	5.9	(6.0)	6.2	1.49	15 to 16
	LST 611 (D)	3.0	5.8	(6.1)	6.7	0.043	13 to 18
	YFNB 13 (E)	0.20	0.58	(0.63)	0.73	8.5	1.9 to 9.0 ‡
	YFNB 29 (G, H)	0.68	1.2	(1.33)	1.9	0.116	3.2 to 14 ‡
	How Island (F)	0.75	‡	‡	‡	‡	4.5 to 7.0 ‡
Zuni	YAG 40 (A, B)	3.4	6.2	(6.7)	7.7	7.6	7.4 to 13
	YAG 39 (C)	12	20	(25)	33	0.038	29 to 33
	LST 611 (D)	‡	‡	‡	‡	‡	‡
	YFNB 13 (E)	0.33	0.97	(1.25)	1.6 *	6 *	1.9 to 9.3
	YFNB 29 (G, H)	0.32	0.70	(0.82)	1.2	9.6	2.4 to 3.3
	How Island (F)	0.38	0.98	(1.05)	1.4	2.9	1.9 to 2.6
Tewa	YAG 40 (A, B)	4.4	6.2	(7.2)	7.6	7.43	8.5 to 16
	YAG 39 (C)	2.0	4.4	(5.0)	5.7	20.2	5.3 to 16
	LST 611 (D)	7.0	13	(13.6)	15	0.256	14 to 18
	YFNB 13 (E)	0.25	1.8	(1.9)	3.0	2.5	7.0 to 16
	YFNB 29 (G, H)	0.23	1.4	(1.7)	2.8 *	40 *	4.3 to 16
	How Island (F)	1.6	2.5	(2.9)	3.4	2.5	3.3 to 9.0

* Estimated value; gamma time-intensity recorder saturated.

† No determination possible; incremental collector failed.

‡ No fallout occurred.

§ Minimum value.

¶ Instrument failed.

IN THE ATOLL AREA

Time of arrival (t_a) indicates the arrival time of fallout as determined from the time of arrival detector results.

Station	Shot Flathead	Shot Navajo	Shot Zuni	Shot Tewa
	t_a	t_a	t_a	t_a
	TSD, hr	TSD, hr	TSD, hr	TSD, hr
YFNB 13 (E)	*	*	†	*
YFNB 29 (G)	0.77	*	0.40	*
YFNB 29 (H)	0.68	*	0.40	*
How Island (F)	‡	*	0.35	*
How Island (K)	‡	*	0.40 §	*
George Island (L)	0.02 †	†	0.33	†
Charlie Island (M)	—	†	—	†
William Island (M)	‡	—	0.22	—
Raft-1 (P)	‡	‡	0.33	†
Raft-2 (R)	†	0.73	†	†
Raft-3 (S)	0.5	0.05 †	0.23	0.48
Skiff-AA	9.1 ¶	9.4	*	5.0
Skiff-BB	†	†	3.8 §	†
Skiff-CC	4.7	‡	*	4.2
Skiff-DD	‡	‡	*	‡
Skiff-EE	‡	‡	3.0 §	‡
Skiff-FF	‡	‡	†	‡
Skiff-GG	*	*	2.0 §	2.9 §
Skiff-HH	†	†	†	2.2
Skiff-KK	‡	†	*	‡
Skiff-LL	‡	‡	†	‡
Skiff-MM	*	4.3	2.9	2.0
Skiff-PP	†	1.4	*	†
Skiff-RR	4.1	†	1.7	†
Skiff-SS	10.6	—	†	—
Skiff-TT	‡	‡	†	‡
Skiff-UU	‡	—	†	—
Skiff-VV	—	—	*	—
Skiff-WW	—	—	—	†
Skiff-XX	—	—	—	1.2 §
Skiff-YY	—	—	—	†

* Skiff or instrument lost, or no instrument present.

† Instrument malfunctioned or may have malfunctioned.

‡ Activity level insufficient to trigger instrument; no fallout or only light fallout occurred.

§ Estimated value; clock reading corrected by ± an integral number of days.

¶ Instrument may have triggered at peak; low arrival rate.

TABLE 3.3 PENETRATION RATES DERIVED FROM EQUIVALENT-DEPTH DETERMINATIONS

Shot	Station	Number of Points	Time Studied		Rate	± Limits 95 pct Confidence
			From	To		
			TSD, hr		m/hr	m/hr
Flathead	YAG 39	10	8.3	12.8	3.0	2.5
Navajo	YAG 39	10	7.4	18.6	2.6	0.2
Navajo	YAG 40	4	10.0	13.0	4.0	2.1
Tewa	YAG 39	26	5.1	14.8	3.0	0.7
Tewa	YAG 40	5	5.2	8.1	4.0	2.9

TABLE 3.4 DEPTHS AT WHICH PENETRATION CEASED FROM EQUIVALENT-DEPTH DETERMINATIONS

Shot	Station	Number of Points	Time Studied		Depth	± Limits 95 pct Confidence	Estimated Thermocline Depth *
			From	To			
			TSD, hr		meters	meters	meters
Navajo	YAG 39	13	30.9	40.1	62	15	40 to 60
Tewa	YAG 39	17	15.3	20.5	49	10	40 to 60
			31.8	34.8			

* See Reference 15.

TABLE 3.5 MAXIMUM PENETRATION RATES OBSERVED

Shot	Station	Number of Points	Time Studied		Rate	± Limits 95 pct Confidence
			From	To		
			TSD, hr		m/hr	m/hr
Zuni	YAG 39	3	15.2	16.8	~ 30	—
			9	17.8	29.8	2.4
Navajo	YAG 39	5	3.1	5.2	23.0	9.8
Tewa	YAG 39	2	3.8	4.1	~ 300	—

TABLE 3.6 EXPONENT VALUES FOR PROBE DECAY MEASUREMENTS

The tabulated numbers are values of n in the expression: $A = A_0 (t/t_0)^n$, where A indicates the activity at a reference time, t, and A_0 the activity at the time of observation, t_0 .

Shot	Exponent Values	
	Project 2.63	Project 2.62a
Zuni	0.90	1.13
Flathead	0.90	1.05
Navajo	1.39	1.39
Tewa	*	1.34

* Instrument malfunctioned.

TABLE 3.7 X-RAY DIFFRACTION ANALYSES AND SPECIFIC ACTIVITIES OF INDIVIDUAL PARTICLES, SHOT ZUNI

Serial Number	Type	Size mm	Activity at H + 240 hrs well counts/min	Net Weight mg	Specific Activity (counts/min)/mg	Compounds Present			Particle Description
						CaCO ₃	CaO	Ca(OH) ₂	
165	Sphere	2	17,500,000	6.9	2,540,000	X	X	X	Creamy-white; surface protuberances.
166	Sphere	2	36,500,000	17.3	2,110,000	X	XX*	XX	White, off-white; green-yellow; patchy.
167	Irregular	†	2,410,000	40.1	60,200	X			Rubbery; fibrous; shapeless.
168	Sphere	2	36,200,000	8.7	4,160,000	X	X	X	Pale yellow; white patches.
169	Irregular	2 × 2.5	101,140	11.9	8,500	XX			Resembles actual coral; easily fractured.
170	Irregular	2 × 6	955,340	†	†	X		X	Columnar structure.
171	Agglomerate	†	6,300,000	†	†		X	X	Broken; extremely friable.
172	Agglomerate	†	16,700,000	†	†	X	X	X	Broken; white and pale yellow-green; friable.
173	Irregular	2.5 × 5.0	2,200,000	11.4	193,000	XX		XX	Cavities and tunnels throughout.
174	Sphere	2.1	24,500,000	7.1	3,450,000	X	X	X	Off-white; slightly ellipsoidal.
175	Sphere	†	9,100,000	2.5	3,640,000		X	X	Clear cubic and yellowish irregular crystals.
176	Irregular	2 × 5	443,620	48.8	9,070	XX			Gray mass with embedded shells.
177	Agglomerate	†	2,600,000	†	†		X	X	Broken; white and pale green; very friable.
178	Irregular	8 × 8	1,900,000	388.0	4,900	X		X	Munmade, concretelike material.
179	Sphere	1.5	6,600,000	5.1	1,300,000	X	XX	XX	Yellowish mosaic surface.
180	Irregular	6 × 10	1,860,000	457.3	4,070	X		X	Same as Particle 178.
181	Irregular	2.5 × 4	27,300,000	25.8	1,060,000	X	XX	XX	Yellowish; finer-grained CaO.
182	Black sphere	1.7	70,600	9.0	7,840				Fe ₃ O ₄ + Fe ₂ O ₃ ·H ₂ O

* Examination was also made of interior of particle; XX indicates a compound detected both on exterior surface and interior.
† No data available.

TABLE 3.8 DISTRIBUTION OF PARTICLE DENSITIES, SHOT ZUNI

Total number of particles = 122. Total number of irregular particles = 7. Total number of yellow spheres = 71. Total number of white spheres = 44. Mean density of all spheres = 2.46 gm/cm³. Mean density of yellow spheres = 2.53 gm/cm³. Mean density of white spheres = 2.33 gm/cm³.

Density gm/cm ³	Percentage of Total Particles	Percentage of Yellow Spheres	Percentage of White Spheres
2.0	2.5	1.4	4.7
2.1	6.7	2.8	11.6
2.2	7.5	2.8	16.3
2.3	22.5	14.0	35.0
2.4	9.2	9.9	9.1
2.5	10.7	8.5	13.9
2.6	15.0	22.6	4.7
2.7	19.2	29.6	4.7
2.8	5.8	8.5	2.3

TABLE 3.9 RADIOCHEMICAL PROPERTIES OF ALTERED AND UNALTERED PARTICLES, SHOT ZUNI

Quantity	Time	Altered Particles		Unaltered Particles	
		Number of Samples	Value	Number of Samples	Value
	TSD, hr				
fissions/gm ($\times 10^{14}$)	—	6	3.8 ± 3.1	9	0.090 ± 0.12
fissions/gm ($\times 10^{14}$) *	—	14	4.2 ± 2.7	24	0.033 ± 0.035
(counts/min)/ 10^4 fissions	71	4	0.34 ± 0.06	4	0.53 ± 0.19
(counts/min)/ 10^4 fissions	105	3	0.35 ± 0.08	7	1.1 ± 0.4
(counts/min)/ 10^4 fissions	239	1	0.054	1	0.12
(counts/min)/ 10^4 fissions	532	2	0.013	1	0.024
ma/ 10^4 fissions ($\times 10^{-17}$)	71	4	30 ± 5	4	59 ± 24
ma/ 10^4 fissions ($\times 10^{-17}$)	105	3	24 ± 7	7	109 ± 31
ma/ 10^4 fissions ($\times 10^{-17}$)	239	1	3.4	1	20
ma/ 10^4 fissions ($\times 10^{-17}$)	481	2	1.7	1	5.1
(counts/min)/ma ($\times 10^{14}$)	71	5	11 ± 1	4	9.3 ± 2.0
(counts/min)/ma ($\times 10^{14}$)	105	4	14 ± 3	13	8.6 ± 1.5
(counts/min)/ma ($\times 10^{14}$)	239	10	16 ± 2	6	8.2 ± 1.3

* Calculated from activity ratios on the basis of particles analyzed for total fissions.

TABLE 3.10 ACTIVITY RATIOS FOR PARTICLES FROM SHOTS ZUNI AND TEWA

Activity Ratio	Shot Zuni				Shot Tewa	
	Altered Particles		Unaltered Particles		All Particles	
	Value	Time	Value	Time	Value	Time
		TSD, hr		TSD, hr		TSD, hr
(counts/min)/ma ($\times 10^{14}$)	$14. \pm 3.$	105	8.6 ± 1.5	105	$11. \pm 6.$	96
	$16. \pm 2.$	239	8.2 ± 1.3	239		
(counts/min)/ 10^4 fissions	0.35 ± 0.08	105	1.1 ± 0.4	105	0.38 ± 0.12	97
	0.054	239	0.12	239	0.18 ± 0.02	172
ma/ 10^4 fissions ($\times 10^{-17}$)	$24. \pm 7.$	105	$109. \pm 31.$	105	$37. \pm 15.$	97
	3.4	239	20.	239		

TABLE 3.11 DISTRIBUTION OF ACTIVITY OF YAG 40 TEWA PARTICLES WITH SIZE AND TYPE

Size Group	Percent of Composite Total Activity	Percent of Size Group Activity		
		Irregular	Spheroidal	Agglomerated
microns				
16 to 33	<0.1	23.4	76.6	0.0
34 to 66	2.2	88.1	5.0	6.9
67 to 99	6.0	46.4	37.5	16.0
100 to 132	11.6	68.6	6.7	24.6
133 to 165	18.2	43.4	5.7	50.9
166 to 198	18.9	49.3	1.9	48.8
199 to 231	8.1	58.0	0.0	41.9
232 to 264	9.9	14.7	0.0	85.3
265 to 297	7.0	14.6	0.1	85.3
298 to 330	11.5	18.5	0.0	81.4
331 to 363	0.7	—	—	100.0
364 to 396	1.7	0.0	2.2	97.7
397 to 429	—	—	—	—
430 to 462	0.6	23.8	76.2	0.0
463 to 495	—	—	—	—
496 to 528	3.4	100.0	0.0	0.0

TABLE 3.12 PHYSICAL, CHEMICAL, AND RADIOLOGICAL PROPERTIES OF SLURRY PARTICLES

All indicated errors are standard deviations of the mean.

Time of Arrival Interval	Station	Number of Particles Measured	Average NaCl Mass μg	Average H ₂ O Mass μg	Average Density \pm Standard Deviation gm/cm^3	Average Diameter * \pm Standard Deviation microns	Average Specific Activity \pm Standard Deviation $\times 10^{10}$ (counts/min)/gm†
Shot Flathead:							
1 to 3	YFNB 29	4 to 10	0.06	0.08	1.28 \pm 0.1	57 \pm 6	43 \pm 8 †
7 to 9	YAG 39 and LST 611	50 to 52	0.42	0.62	1.29 \pm 0.01	112 \pm 2	282 \pm 20
11 to 12	YAG 40	10	0.94	1.20	1.35 \pm 0.05	129 \pm 16	285 \pm 160
15 to 18	YAG 40	3 to 4	0.50	0.69	1.34 \pm 0.08	121 \pm 6	265 \pm 90
Totals		67 to 76			1.30 \pm 0.01		282 \pm 30 ‡
Shot Navajo:							
1 to 3	YFNB 13	5 to 20	7.77	7.94	1.38 \pm 0.04	272 \pm 14	4 \pm 0.6 †
3 to 5	YAG 39	9 to 14	7.62	4.49	1.50 \pm 0.01	229 \pm 24	16 \pm 3
5 to 6	LST 611	14	1.61	1.83	1.41 \pm 0.04	166 \pm 6	14 \pm 2
7 to 9	YAG 40	4 to 10	1.25	1.08	1.45 \pm 0.04	142 \pm 22	9 \pm 3
9 to 10	YAG 40	5 to 23	0.44	0.60	1.31 \pm 0.02	110 \pm 5	11 \pm 2
10 to 11	YAG 40	11 to 15	0.66	0.50	1.43 \pm 0.03	111 \pm 4	16 \pm 4
11 to 12	YAG 40	33	0.30	0.44	1.32 \pm 0.01	94 \pm 4	26 †
12 to 13	YAG 40	28	0.31	0.31	1.37 \pm 0.01	96 \pm 2	21 †
13 to 14	YAG 40	6	0.17	0.27	1.28 \pm 0.02	86 \pm 7	29 †
14 to 15	YAG 40	5	0.10	0.18	1.30 \pm 0.03	75 \pm 2	23 †
15 to 18	YAG 40	13 to 14	0.06	0.32	1.15 \pm 0.02	84 \pm 4	56 \pm 7
Totals		133 to 192			1.35 \pm 0.01		21 \pm 3 ‡

* Diameter of spherical slurry droplet at time of arrival.

† Photon count in well counter at H+12.

‡ Not included in calculation of total.

§ Based on summation of individual-particle specific activities.

¶ Calculated value based on total tray count, number of particles per tray, and average NaCl mass per particle; not included in calculation of total.

TABLE 3.13 COMPOUNDS IDENTIFIED IN SLURRY-PARTICLE INSOLUBLE SOLIDS

All compounds were identified by X-ray diffraction except Fe₂O₃ and NaCa(SiO₄), which were identified by electron diffraction; 2CaO·Fe₂O₃ was also observed in one sample by electron diffraction. The presence of Cu in the Navajo sample was established by X-ray diffraction. I indicates definite identification and PI possible identification.

Compound	Shot Flathead	Shot Navajo
2CaO·Fe ₂ O ₃	I	
CaCO ₃	I	I
Fe ₂ O ₃	I	
Fe ₂ O ₄	I	I
CaSO ₄ ·2H ₂ O	I	
NaCl	I	I
NaCa(SiO ₄)		PI
SiO ₂		PI
MgO·Fe ₂ O ₃		PI

TABLE 3.14 RADIOCHEMICAL PROPERTIES OF SLURRY PARTICLES, YAG 40, SHOT FLATHEAD

Analysis of the combined particles led to the following data: Description, essentially NaCl; WC, 0.872×10^8 counts/min; time of WC, 156 TSD, hrs; GIC, 88×10^{-11} ma; time of GIC, 196 TSD, hrs; fissions, 6.83×10^{10} ; Ba¹⁴⁰Sr⁹³; Np²³⁹ product/fission ratio, 0.41; activity ratios at 196 TSD, hrs, 9.9×10^{14} (counts/min)/ma, 0.13 (counts/min)/10⁴ fissions, and 13.0×10^{-17} ma/10⁴ fissions.

Field Number	WC $\times 10^8$ counts/min	Time of WC TSD, hrs
2680-1	0.0668	189
2682-2	0.116	190
2334-1	0.0730	190
2677-1	0.0449	193
2333-1	0.131	190
2682-1	0.0607	189
2331-1	0.249	189
2333-2	0.064	191
2334-4	0.146	190
2333-3	0.0487	190
2332-1	0.0295	190
2681-3	0.235	190
2681-1	0.141	190

TABLE 3.16 SURFACE DENSITY OF FALLOUT COMPONENTS IN TERMS OF ORIGINAL COMPOSITION

Shot	Collector	Weight, mg/ft ²		
		Coral	Sea Water	Total
Flathead	YAG 40-B-19 FL	14.0 ± 1.0	195.2 ± 16.2	209.2 ± 16.2
	LST 611-D-51 FL	0.0 ± 1.0	89.2 ± 16.2	89.2 ± 16.2
	YFNB 13-E-56 FL	1.6 ± 1.0	6,155.0 ± 31.3	6,156.7 ± 31.3
	How F-67 FL	0.0 ± 2.57	32.6 ± 17.7	32.6 ± 17.9
	YFNB 29-H-81 FL	5.4 ± 1.0	564.2 ± 31.3	569.5 ± 31.3
Navajo	YAG 40-B-19 NA	4.3 ± 1.0	646.8 ± 31.3	651.1 ± 31.3
	YAG 39-C-36 NA	3.2 ± 1.0	1,415.4 ± 31.3	1,418.6 ± 31.3
	LST 611-D-51 NA	13.0 ± 1.0	1,299.5 ± 31.3	1,312.5 ± 31.3
	YFNB 13-E-54 NA	51.6 ± 1.0	5,129.8 ± 31.3	5,181.5 ± 31.3
	How F-67 NA	12.0 ± 2.6	561.3 ± 35.4	573.3 ± 35.4
	YFNB 29-H-81 NA	24.0 ± 1.0	0.0 ± 31.3	24.0 ± 31.3
Zuni	YAG 40-B-17 ZU	1,810.1 ± 1.0	116.8 ± 16.2	1,927.0 ± 16.2
	YAG 40-B-19 ZU	522.6 ± 1.0	166.1 ± 31.3	688.7 ± 31.3
	YAG 39-C-23 ZU	17.8 ± 1.0	88.6 ± 16.2	106.4 ± 16.2
	YAG 39-C-36 ZU	19.2 ± 1.0	55.0 ± 31.3	74.2 ± 31.3
	YFNB 13-E-56 ZU	1,574.8 ± 1.0	1,121.6 ± 16.2	2,696.4 ± 16.2
	YFNB 13-E-58 ZU	797.9 ± 1.0	583.9 ± 16.2	1,381.8 ± 16.2
	How F-63 ZU	989.5 ± 2.6	86.7 ± 0.3	1,076.2 ± 2.6
	How F-67 ZU	592.3 ± 2.6	221.8 ± 17.7	814.2 ± 17.9
	YFNB 29-H-79 ZU	2,912.9 ± 1.0	561.0 ± 16.2	3,473.8 ± 16.2
	YFNB 29-H-81 ZU	2,788.4 ± 1.0	1,274.2 ± 16.2	4,062.6 ± 16.2
	Tewa	YAG 40-B-19 TE	661.7 ± 1.0	273.6 ± 16.2
YAG 39-C-36 TE		1,726.8 ± 1.0	517.5 ± 16.2	2,244.4 ± 16.2
LST 611-D-51 TE		62.9 ± 1.0	0.0 ± 31.3	62.9 ± 31.3
YFNB 13-E-56 TE		54.1 ± 1.0	199.0 ± 16.2	253.2 ± 16.2
How F-67 TE		15.0 ± 2.4	13.6 ± 0.2	28.6 ± 2.4
YFNB 29-H-81 TE		4,533.1 ± 1.0	0.0 ± 31.3	4,533.1 ± 31.3

67

Page 66 Deleted.
Pages 68 thru 75 Deleted

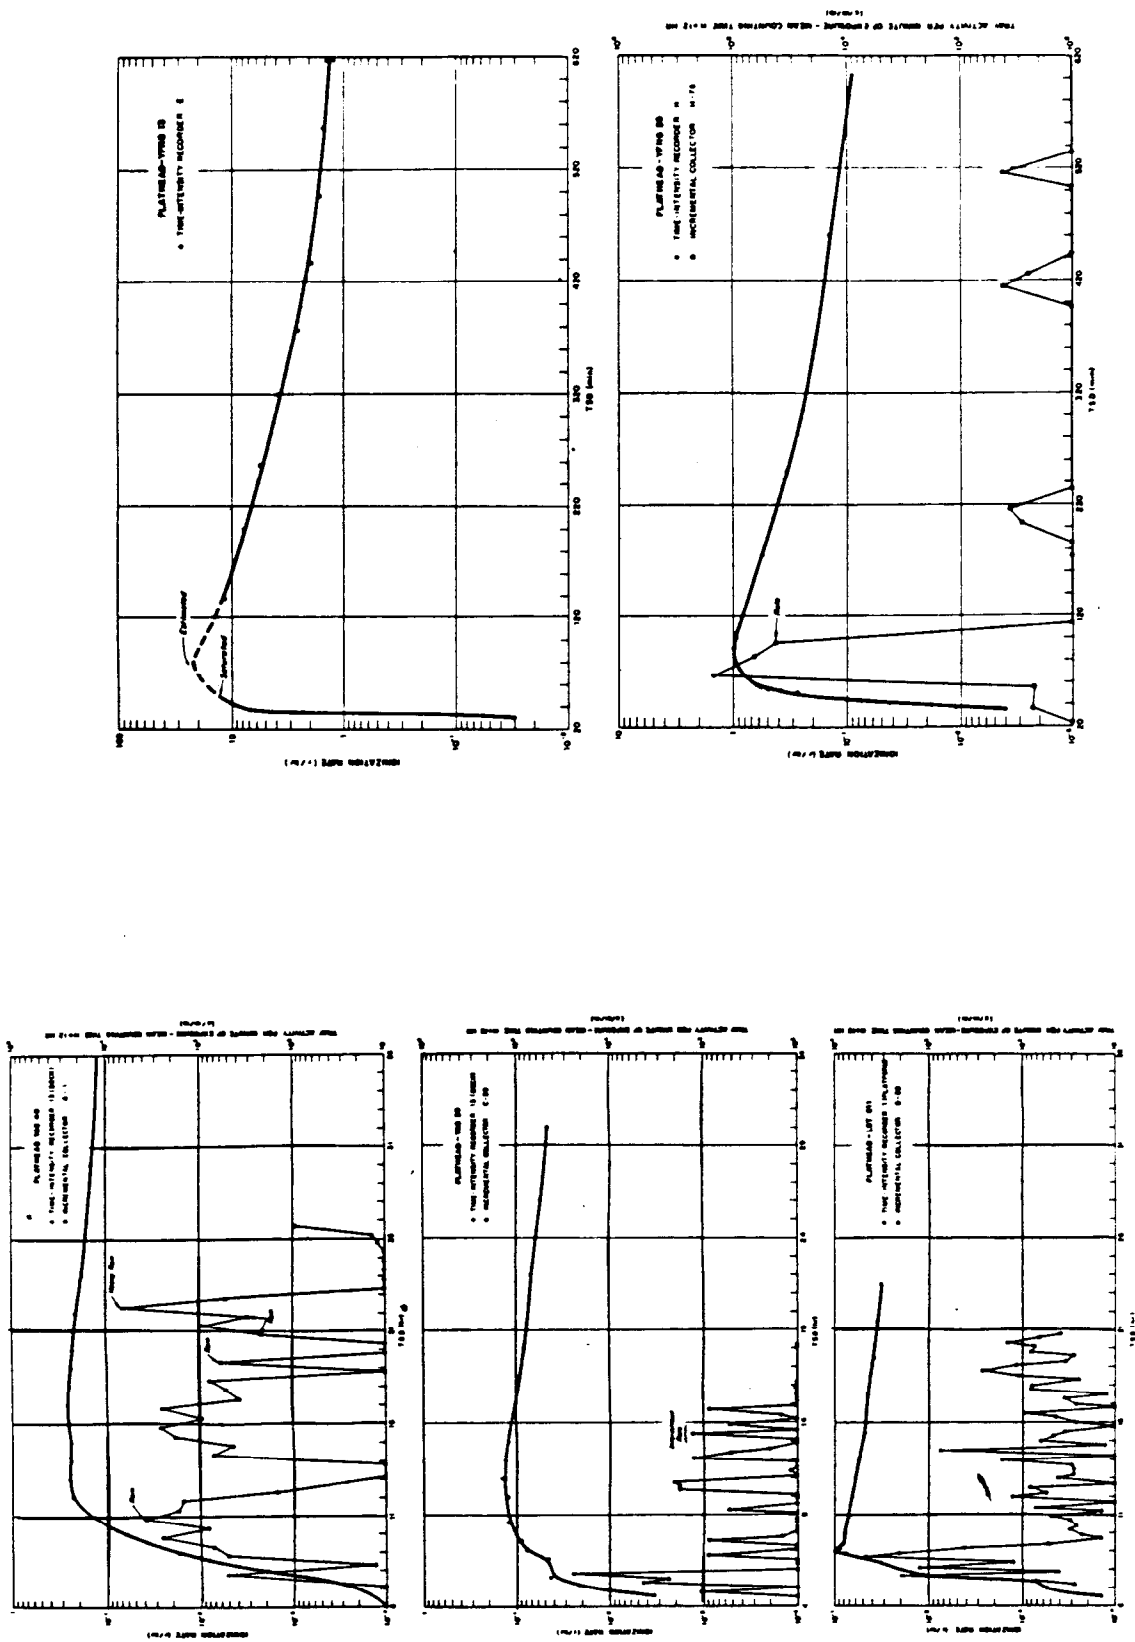


Figure 3.1 Rates of arrival at major stations, Shot Flathead.

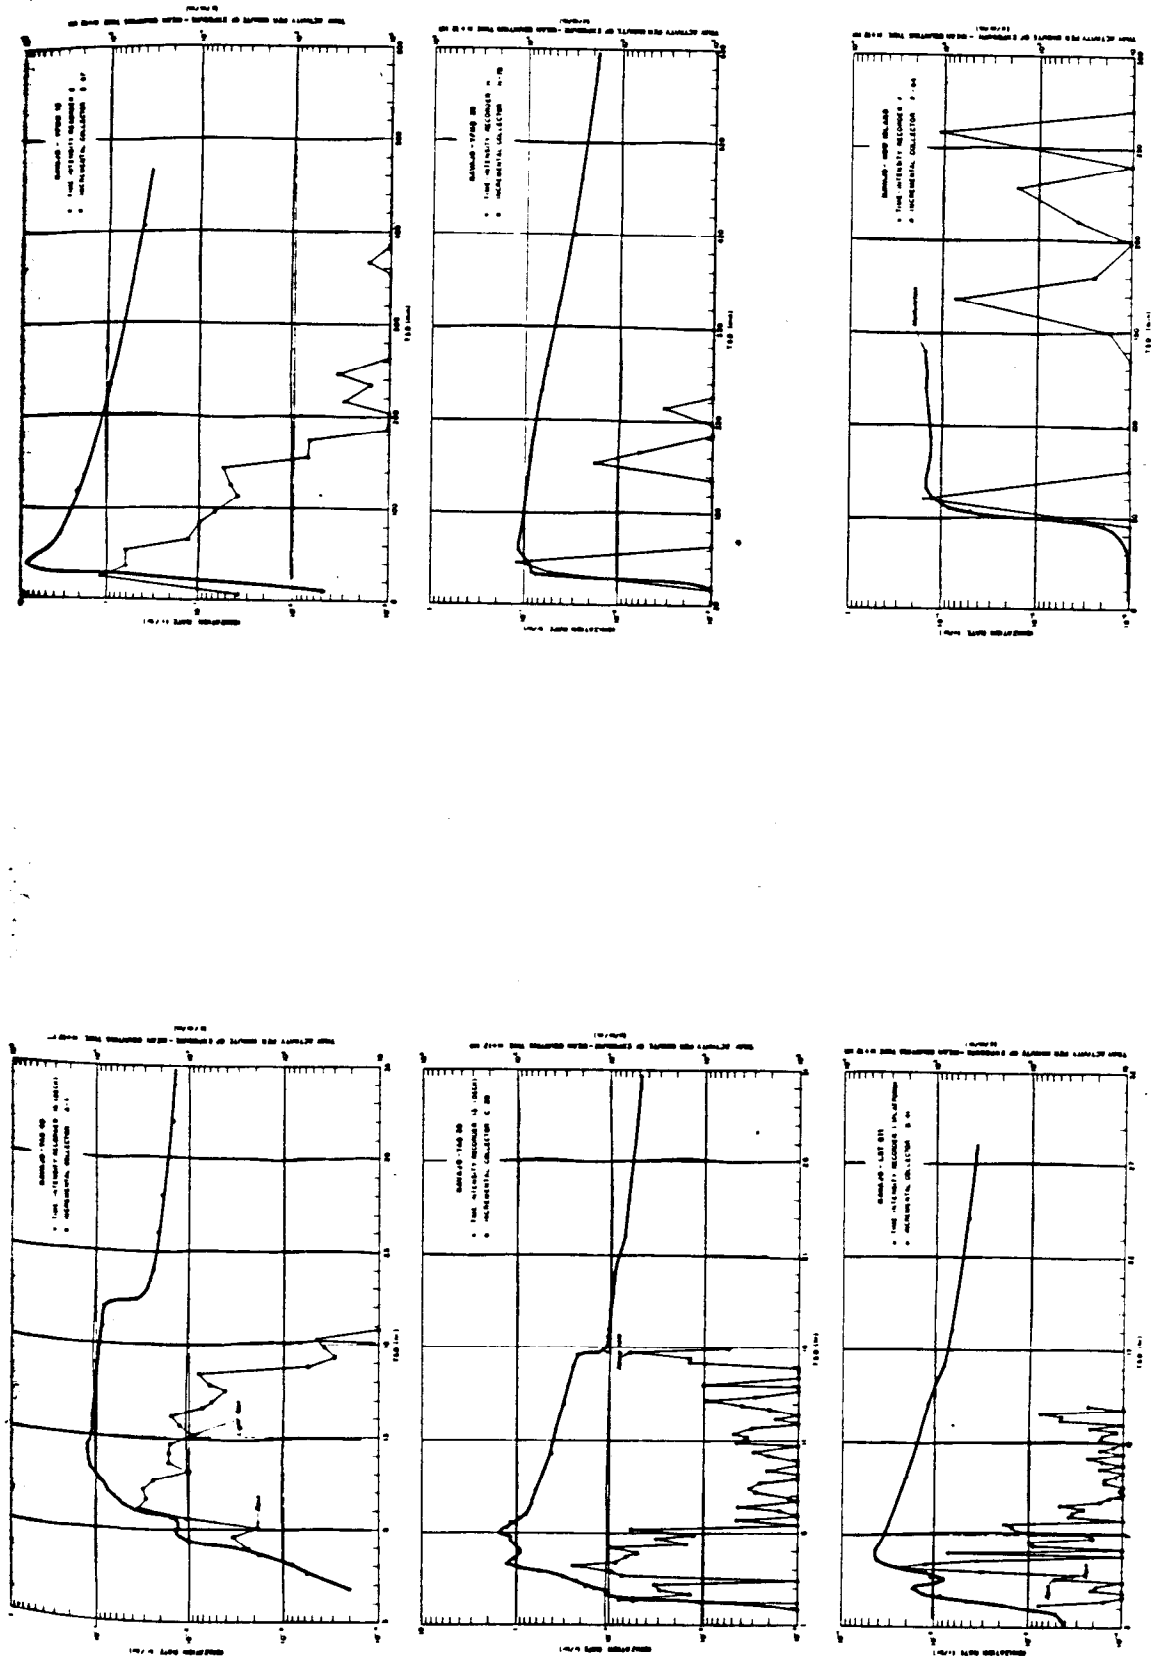


Figure 3.2 Rates of arrival at major stations, Shot Navajo.

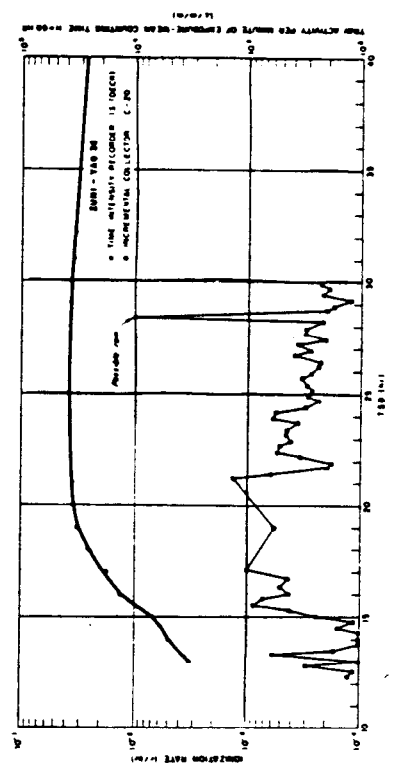
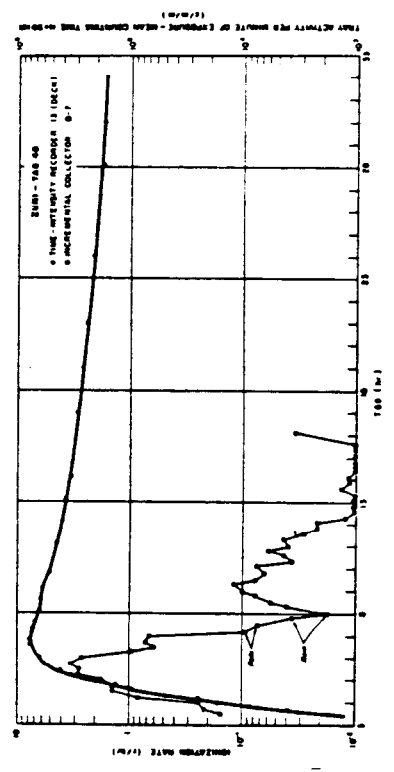
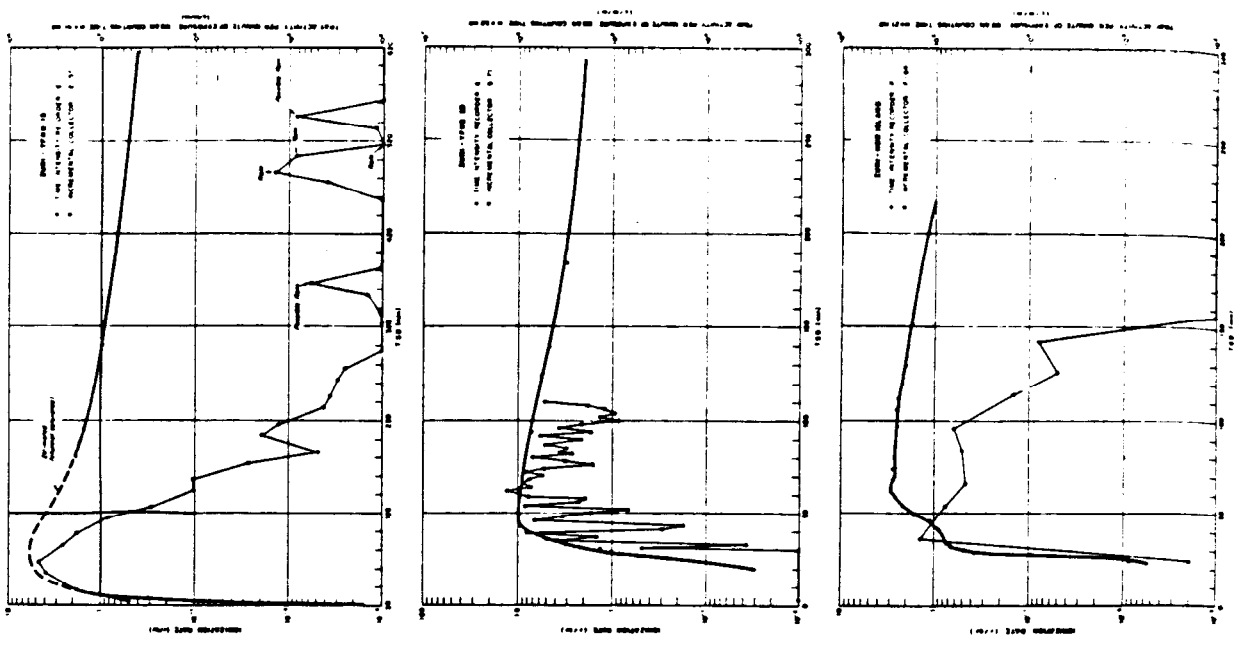


Figure 3.3 Rates of arrival at major stations, Shot Zuni.

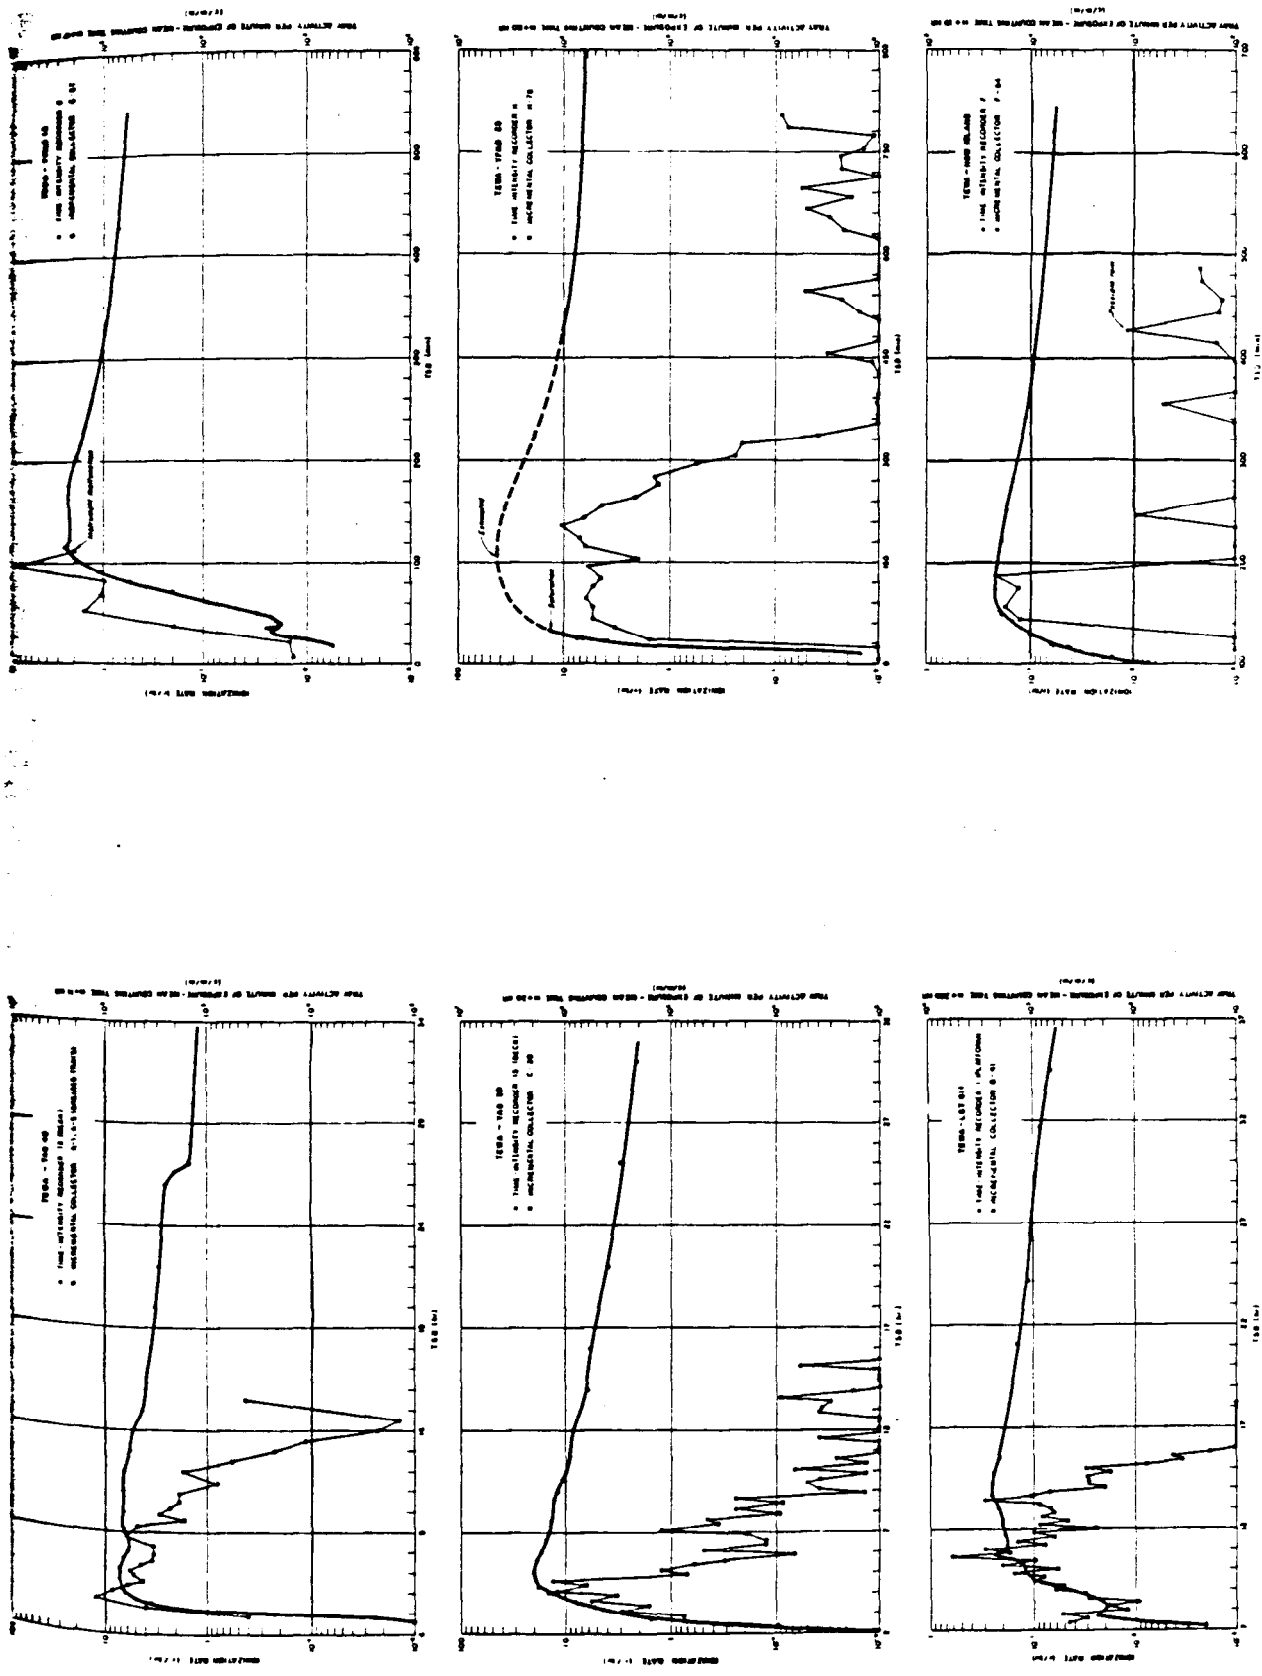


Figure 3.4 Rates of arrival at major stations, Shot Tewa.

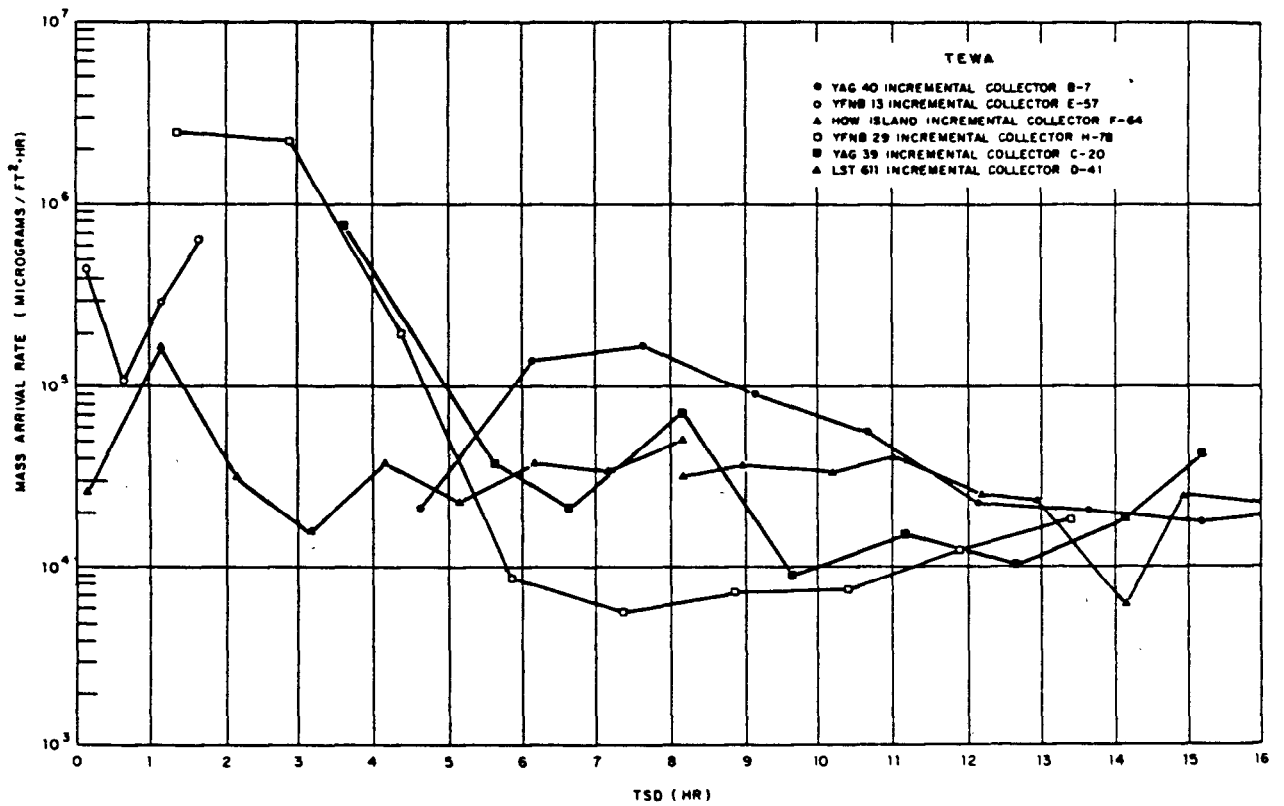
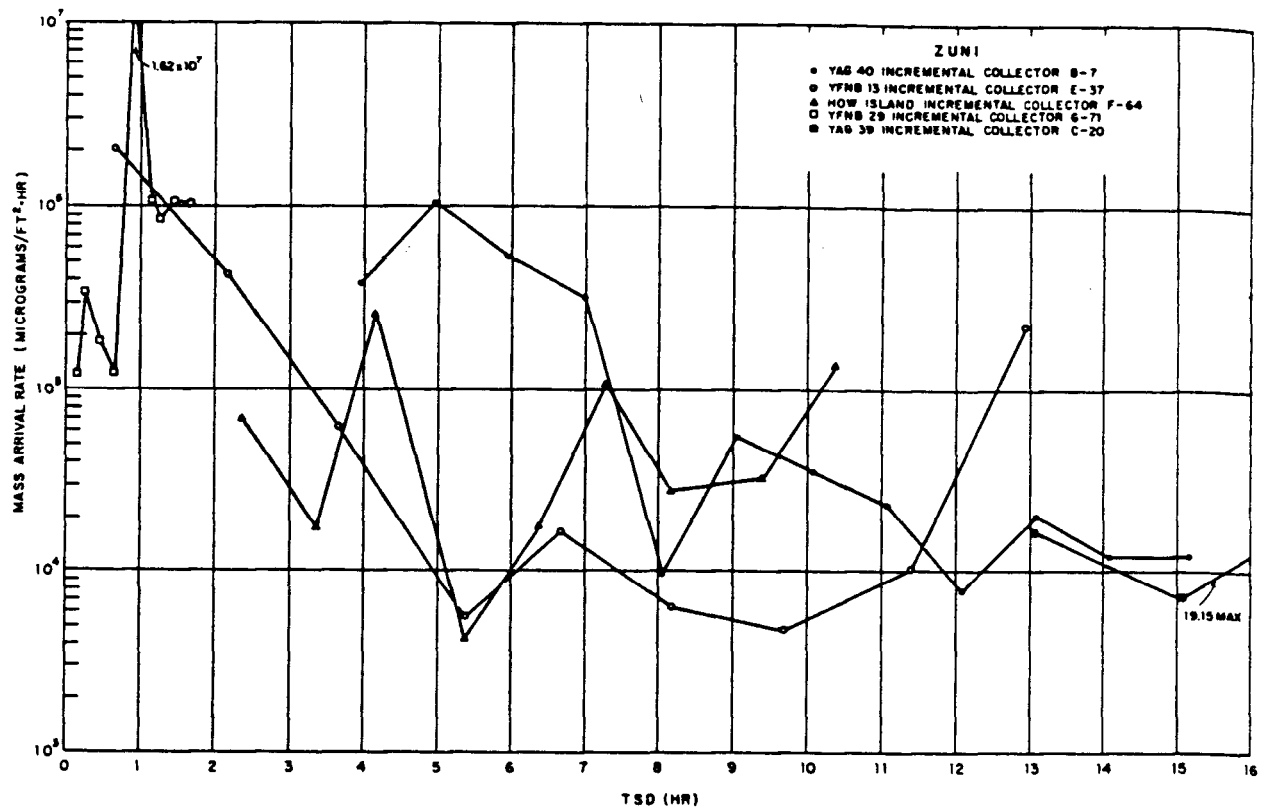


Figure 3.5 Calculated mass-arrival rate, Shots Zuni and Tewa.

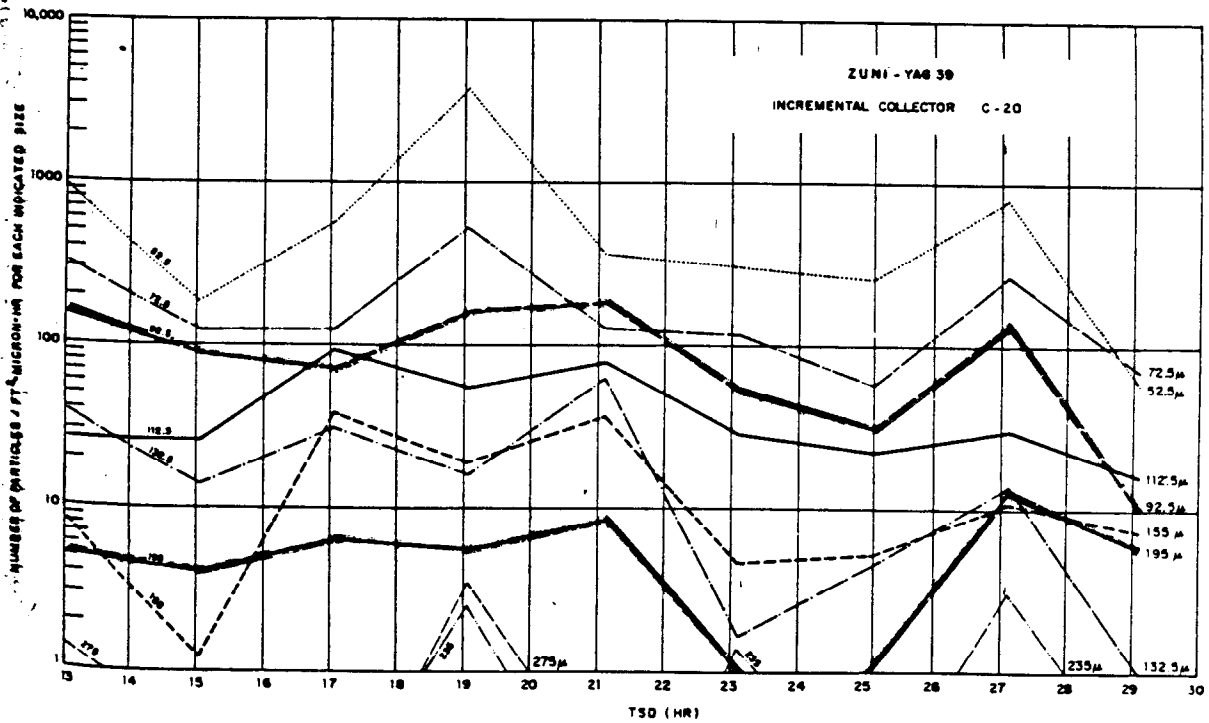
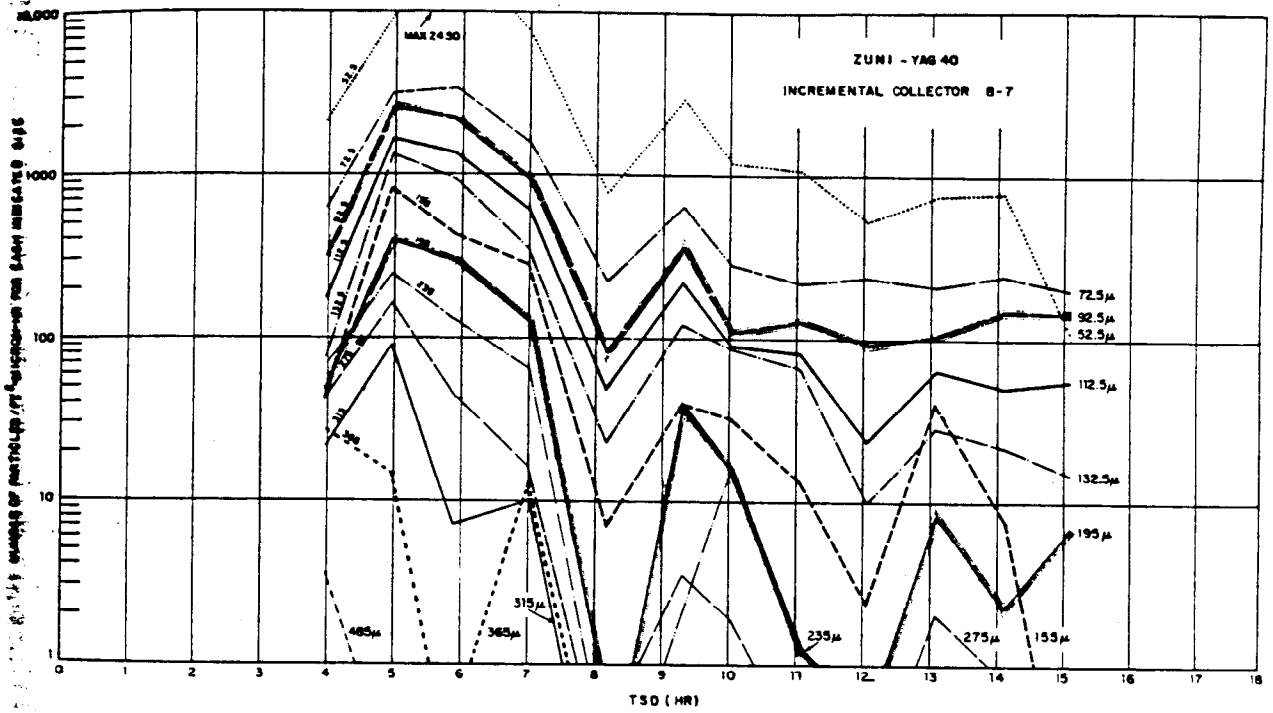


Figure 3.6 Particle-size variation at ship stations, Shot Zuni.

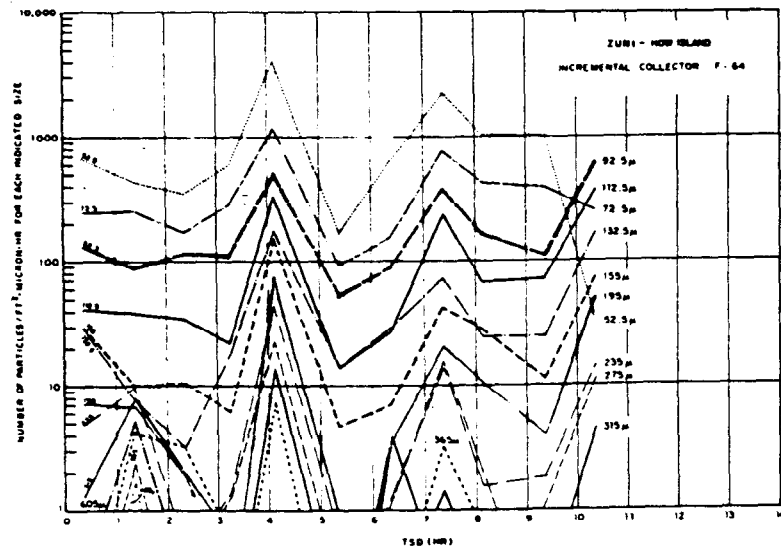
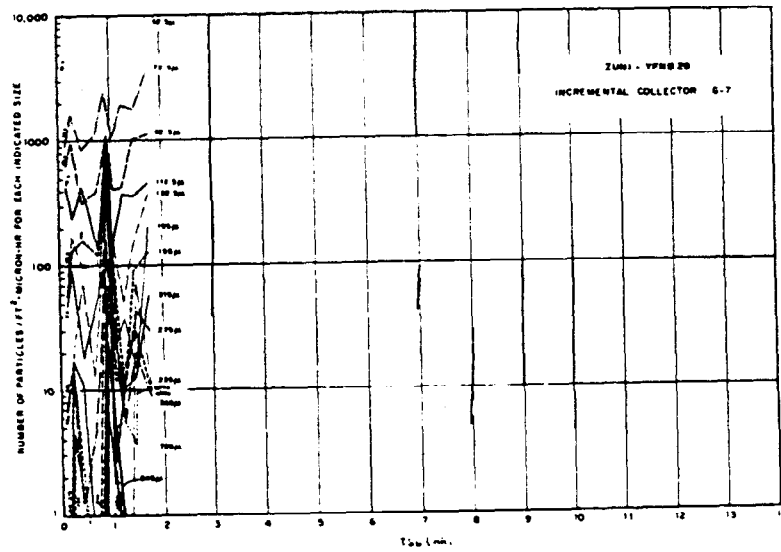
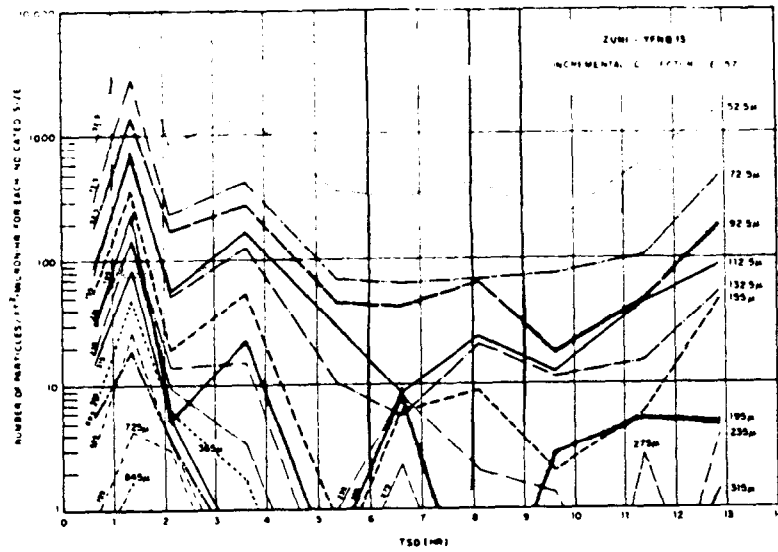


Figure 3.7 Particle-size variation at barge and island stations, Shot Zuni.

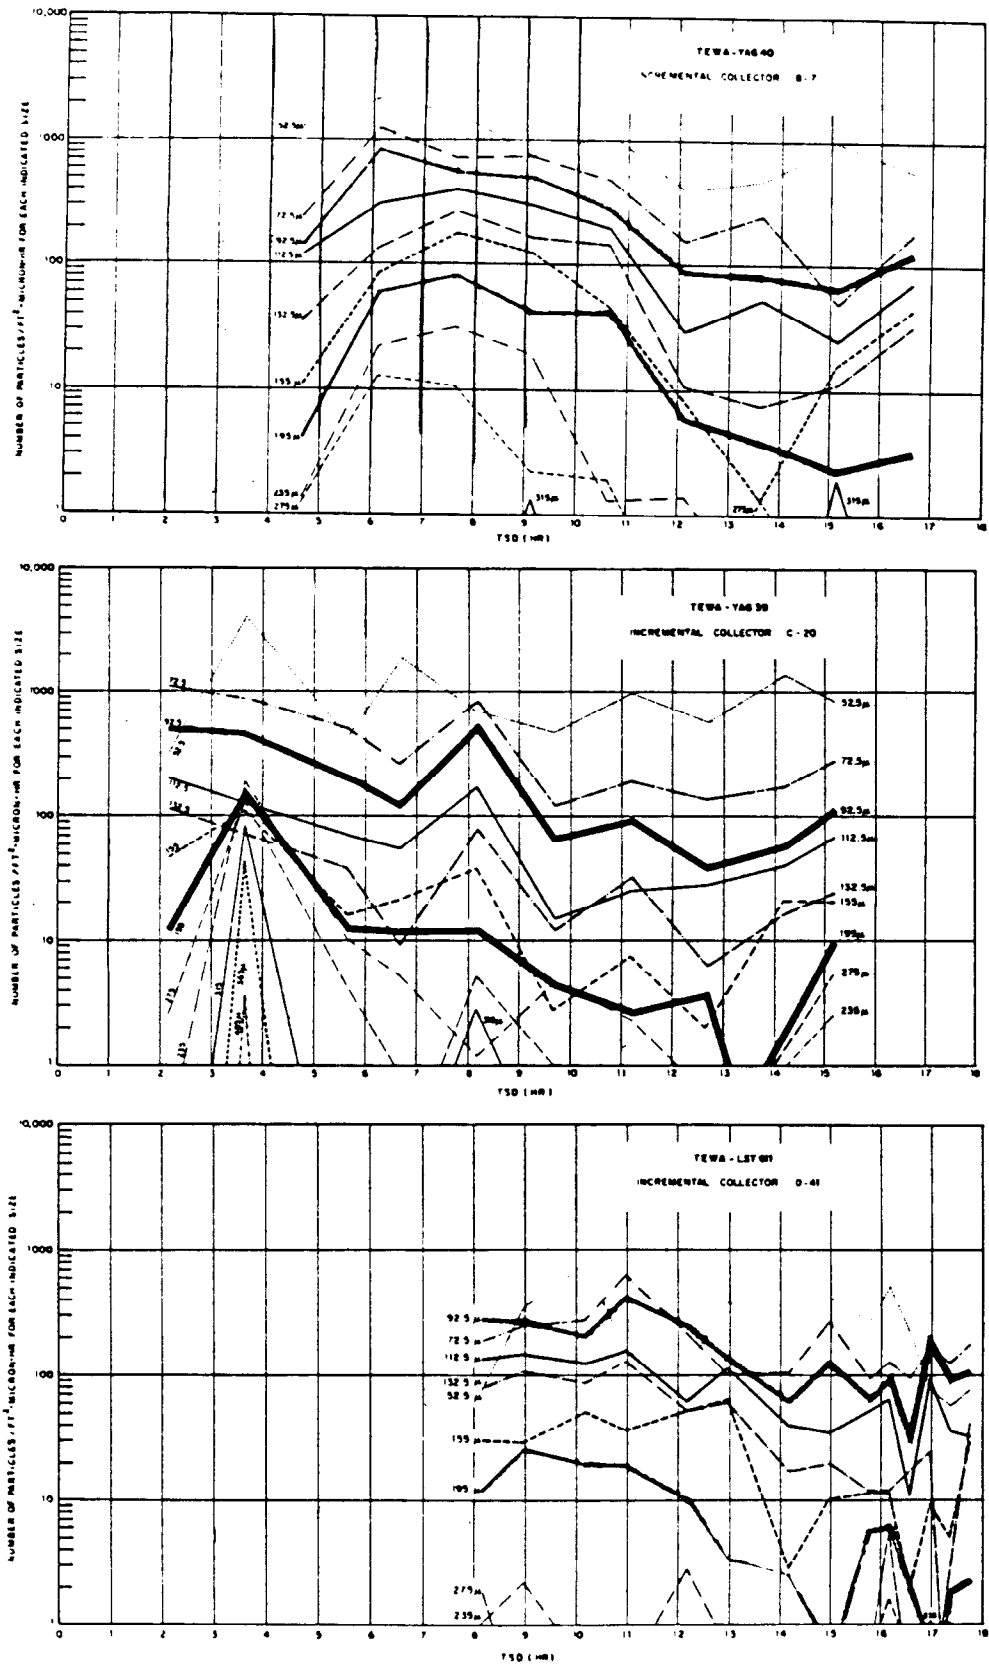


Figure 3.8 Particle-size variation at ship stations, Shot Tewa.

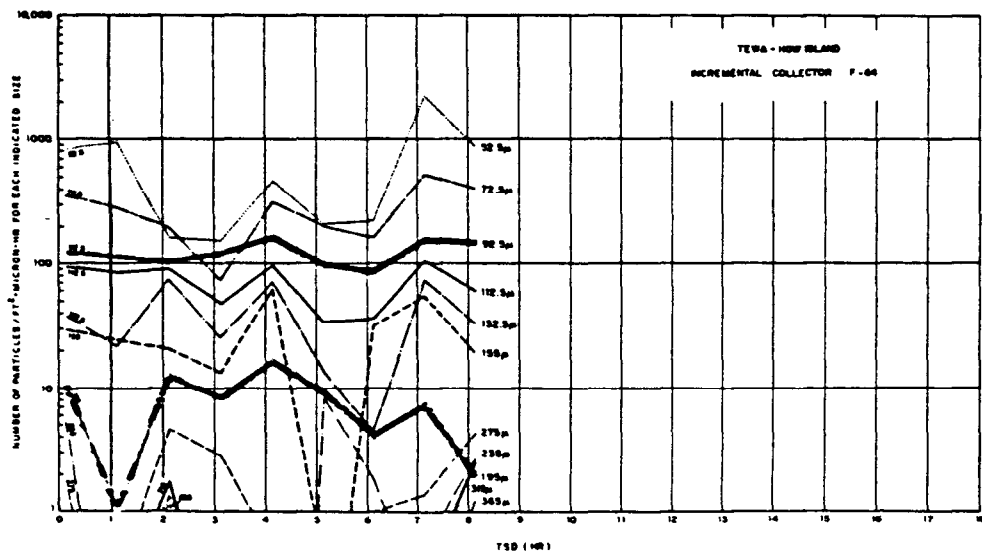
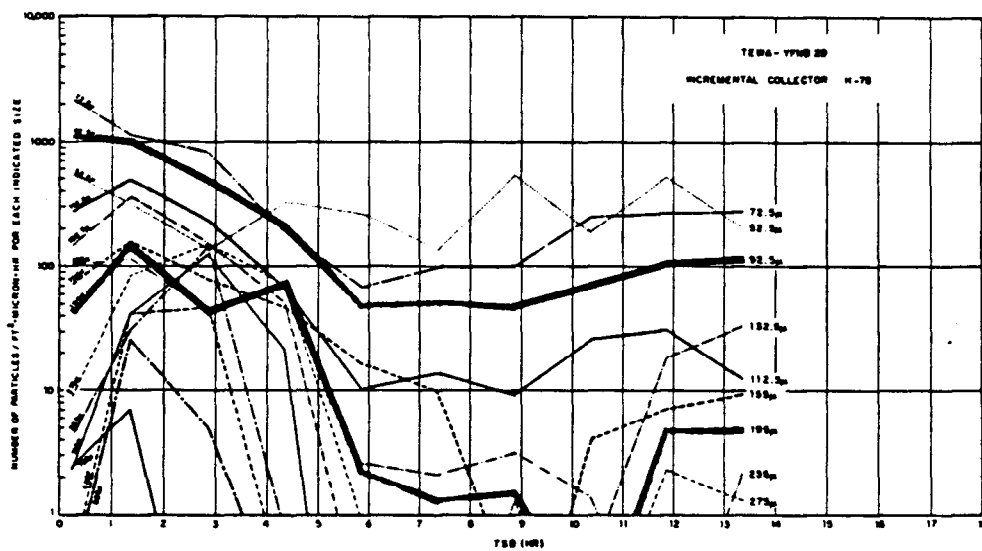
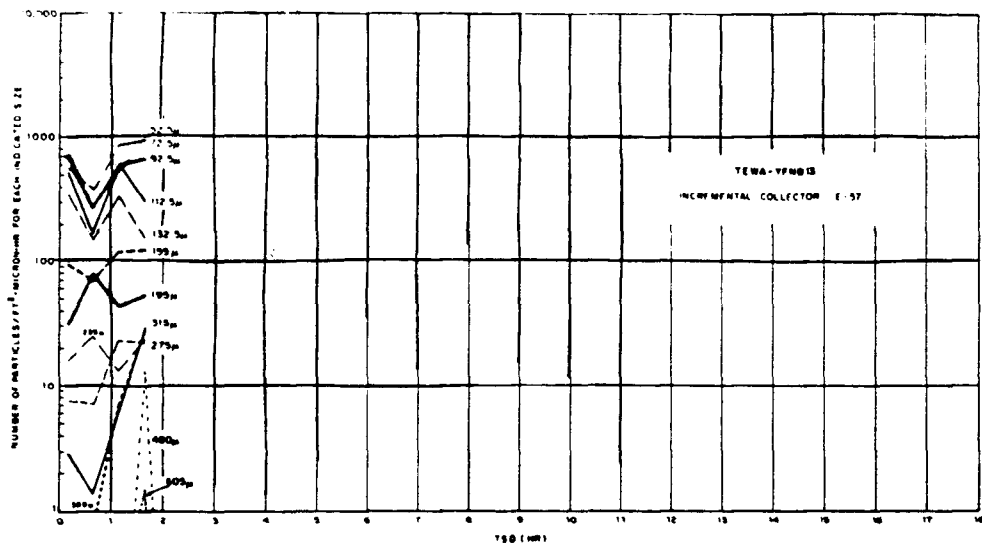


Figure 3.9 Particle-size variation at barge and island stations, Shot Tewa.

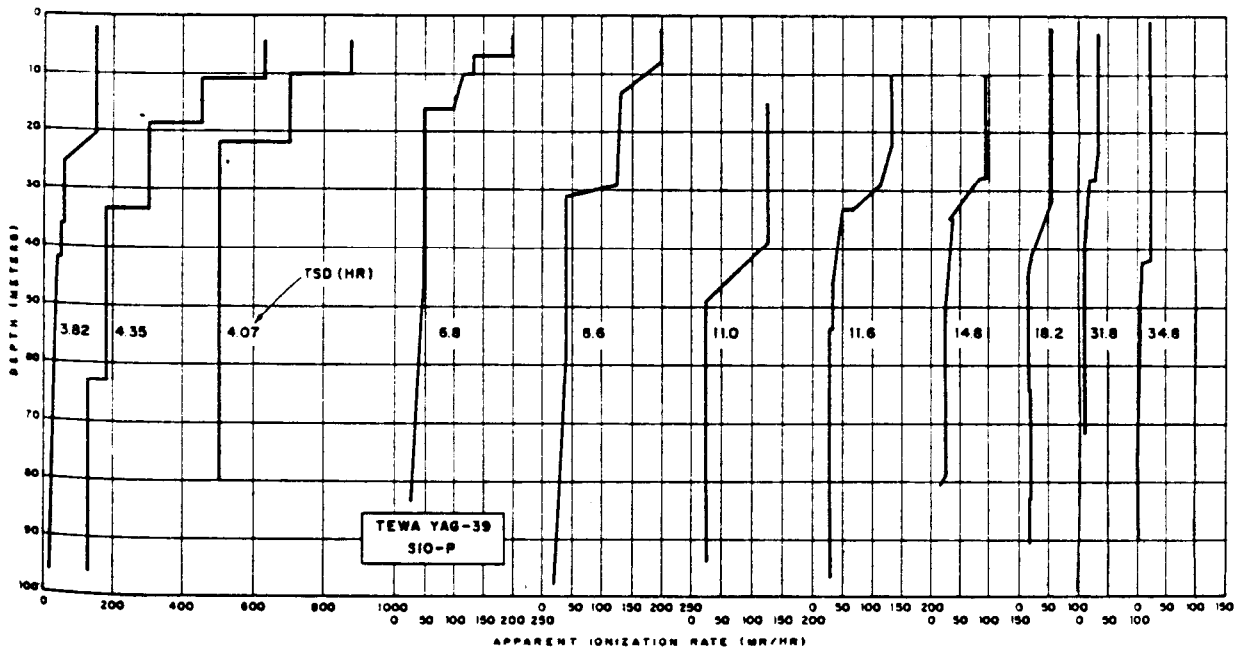
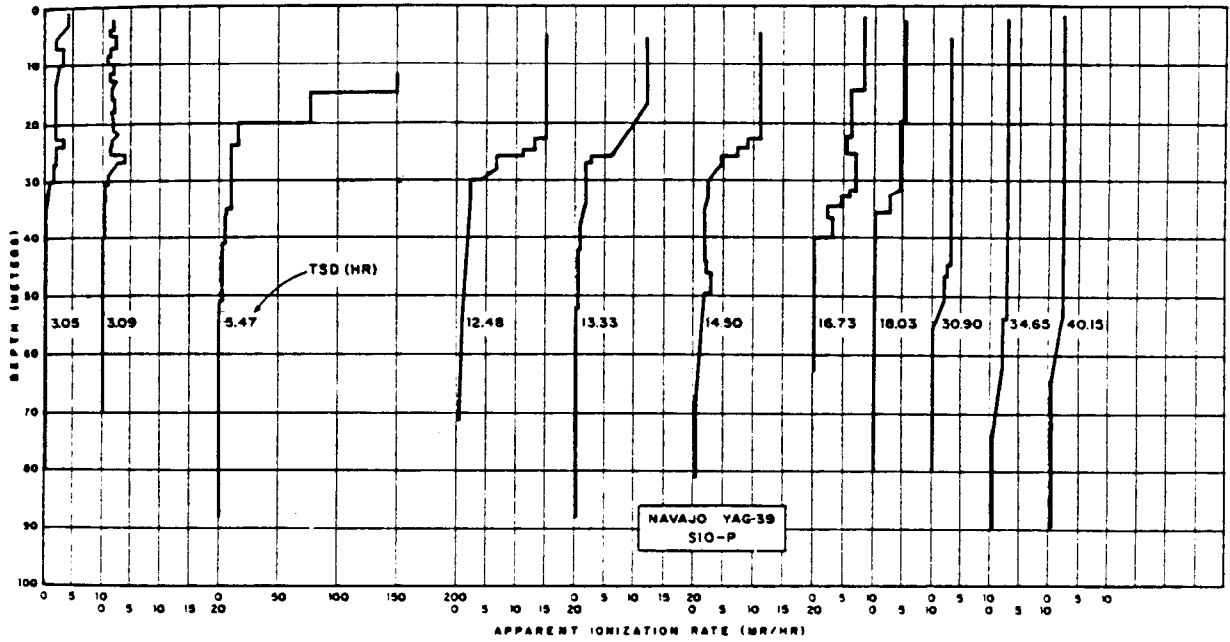


Figure 3.10 Ocean activity profiles, Shots Navajo and Tewa.

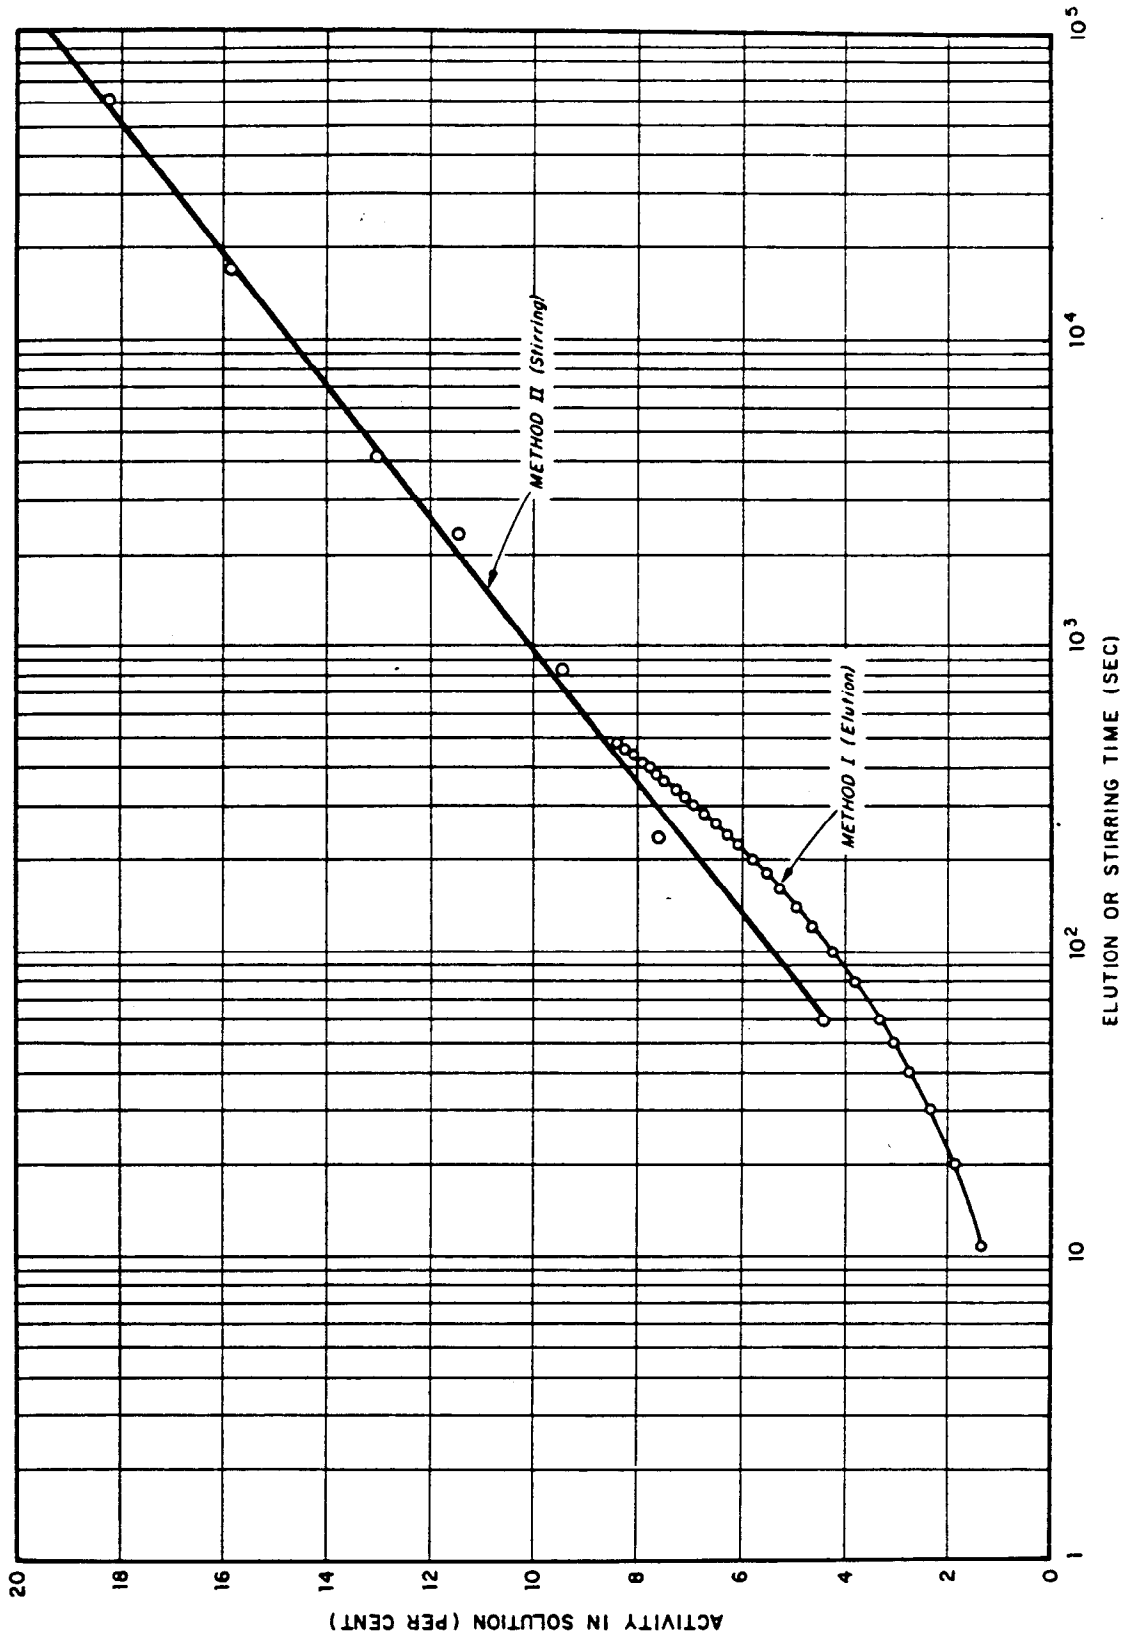


Figure 3.11 Solubility of solid fallout particles.

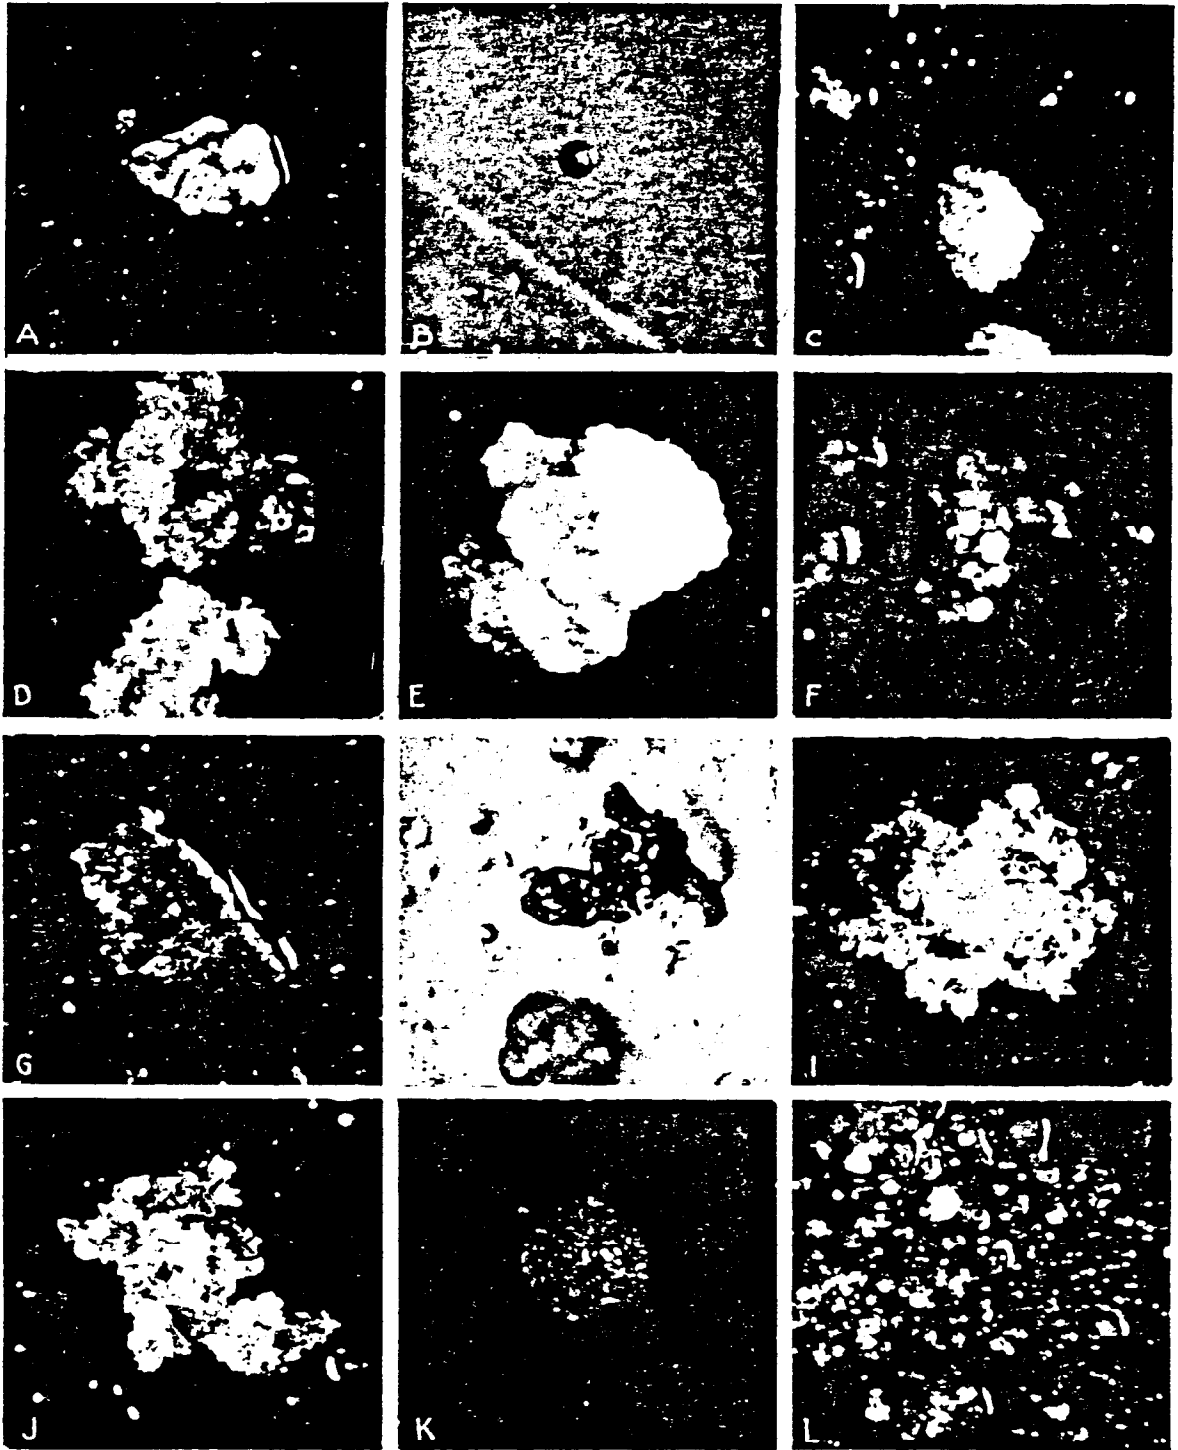


Figure 3.13 Typical solid fallout particles.


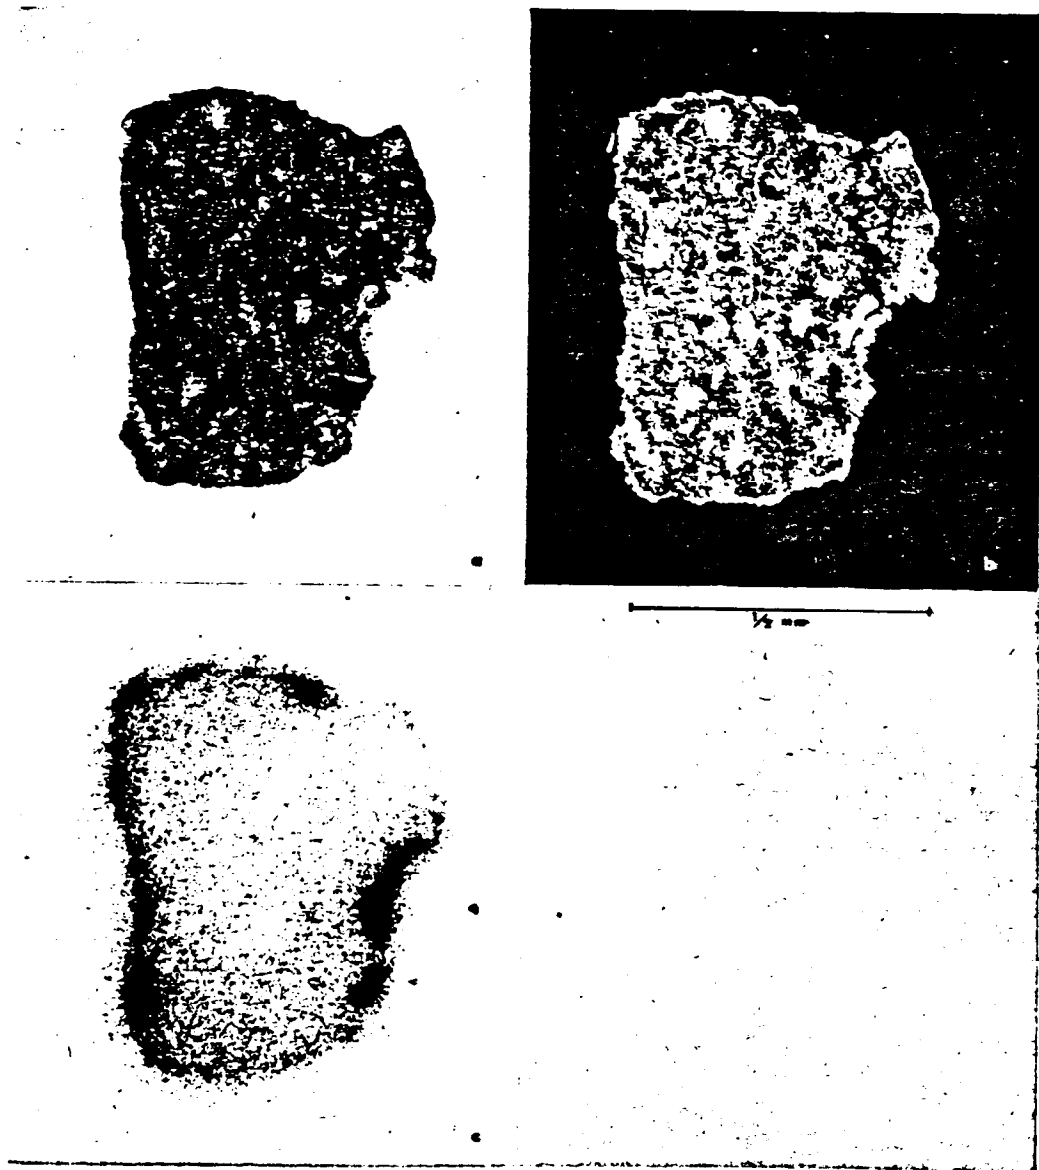


Figure 3.14 Angular fallout particle, Shot Zuni.
a. Ordinary light. b. Crossed nicols. c. Radioautograph.

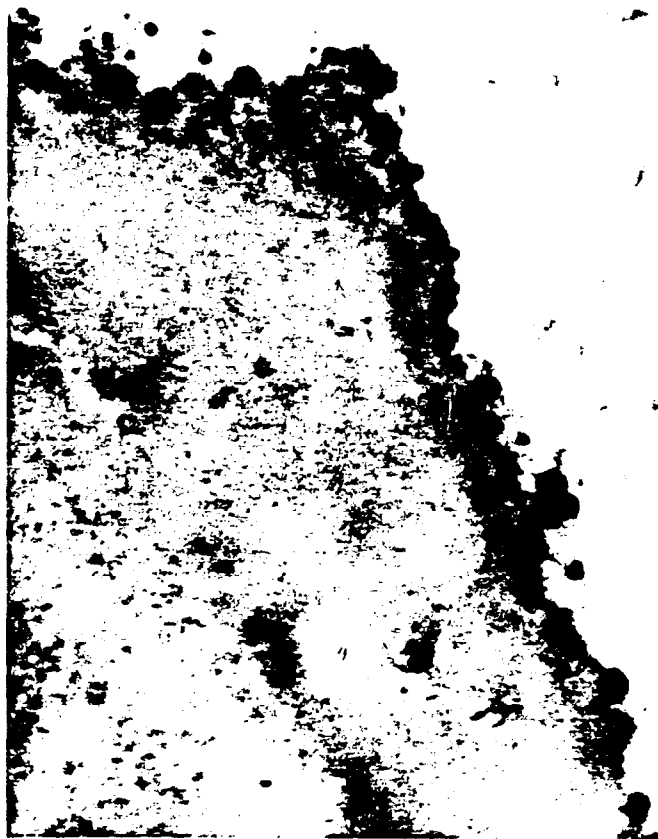

50 μ

Figure 3.15 High magnification of part of an angular fallout particle, Shot Zuni.

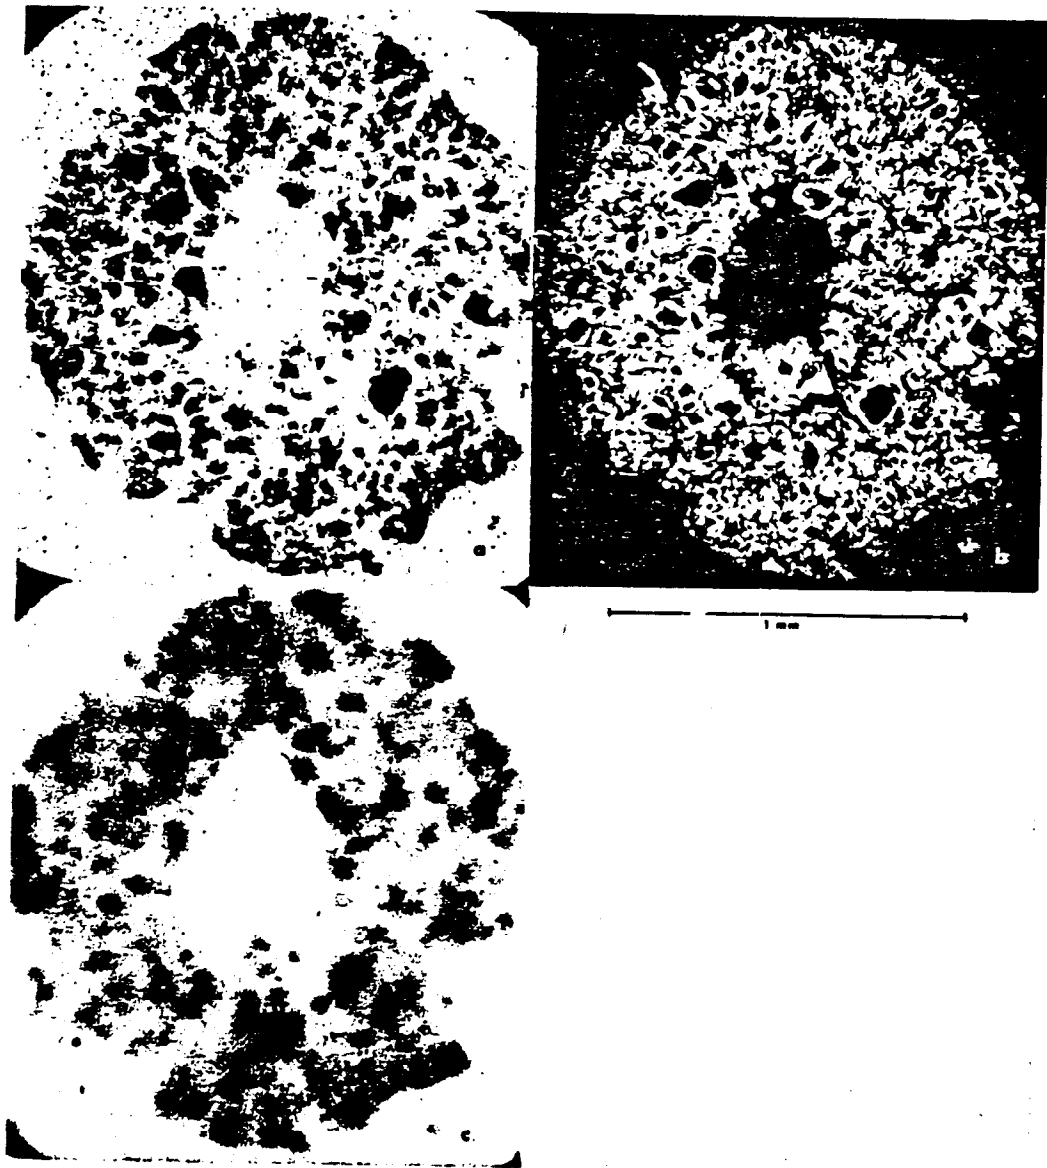


Figure 3.16 Spheroidal fallout particle, Shot Zuni.
a. Ordinary light. b. Crossed nicols. c. Radioautograph.

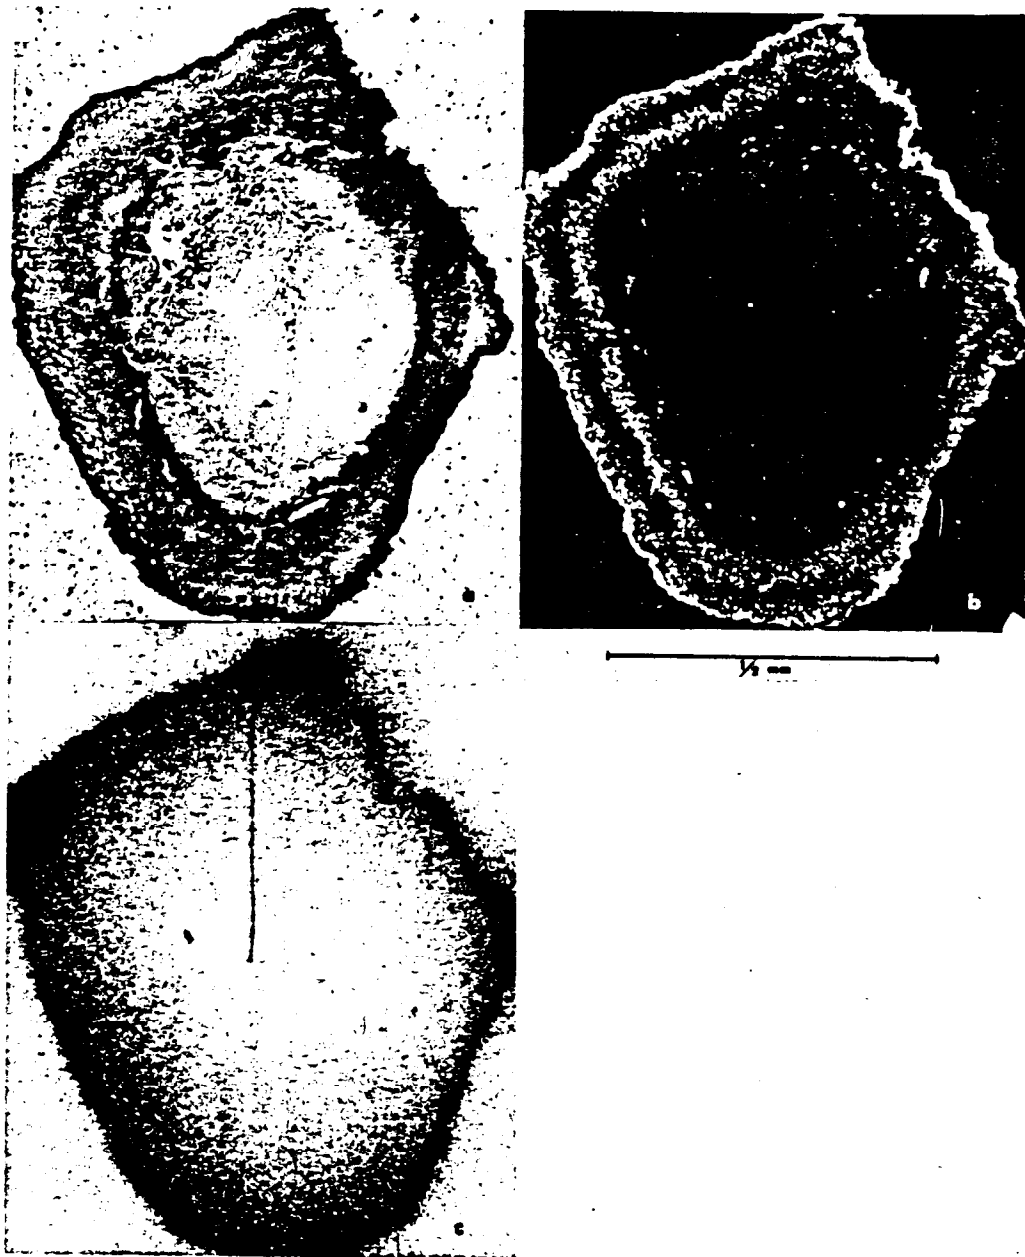


Figure 3.17 Angular fallout particle, Shot Tewa.
a. Ordinary light. b. Crossed nicols. c. Radioautograph.

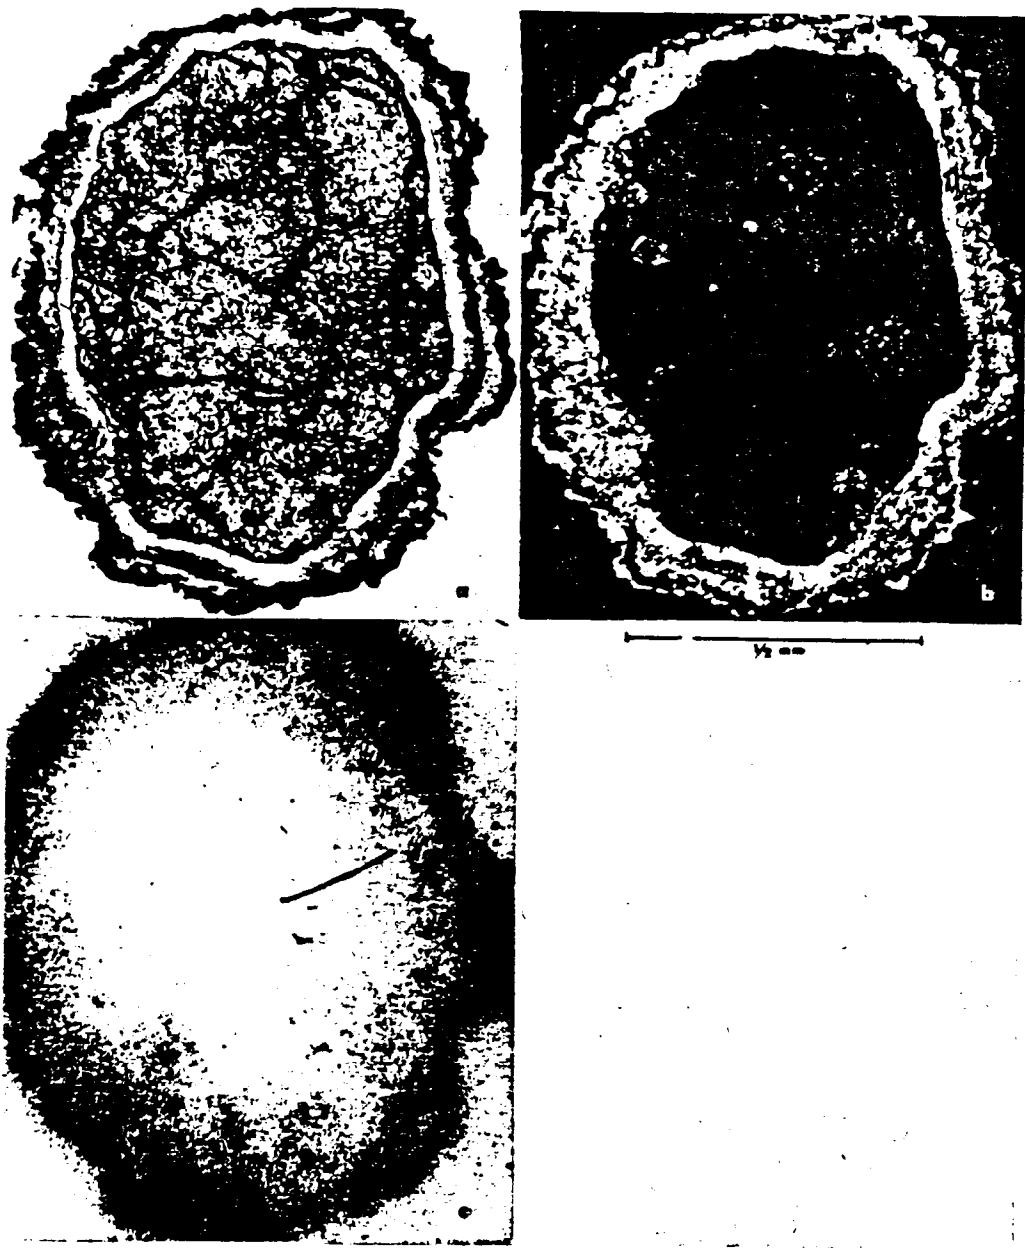


Figure 3.18 Spheroidal fallout particle, Shot Tewa.
a. Ordinary light. b. Crossed nicols. c. Radioautograph.

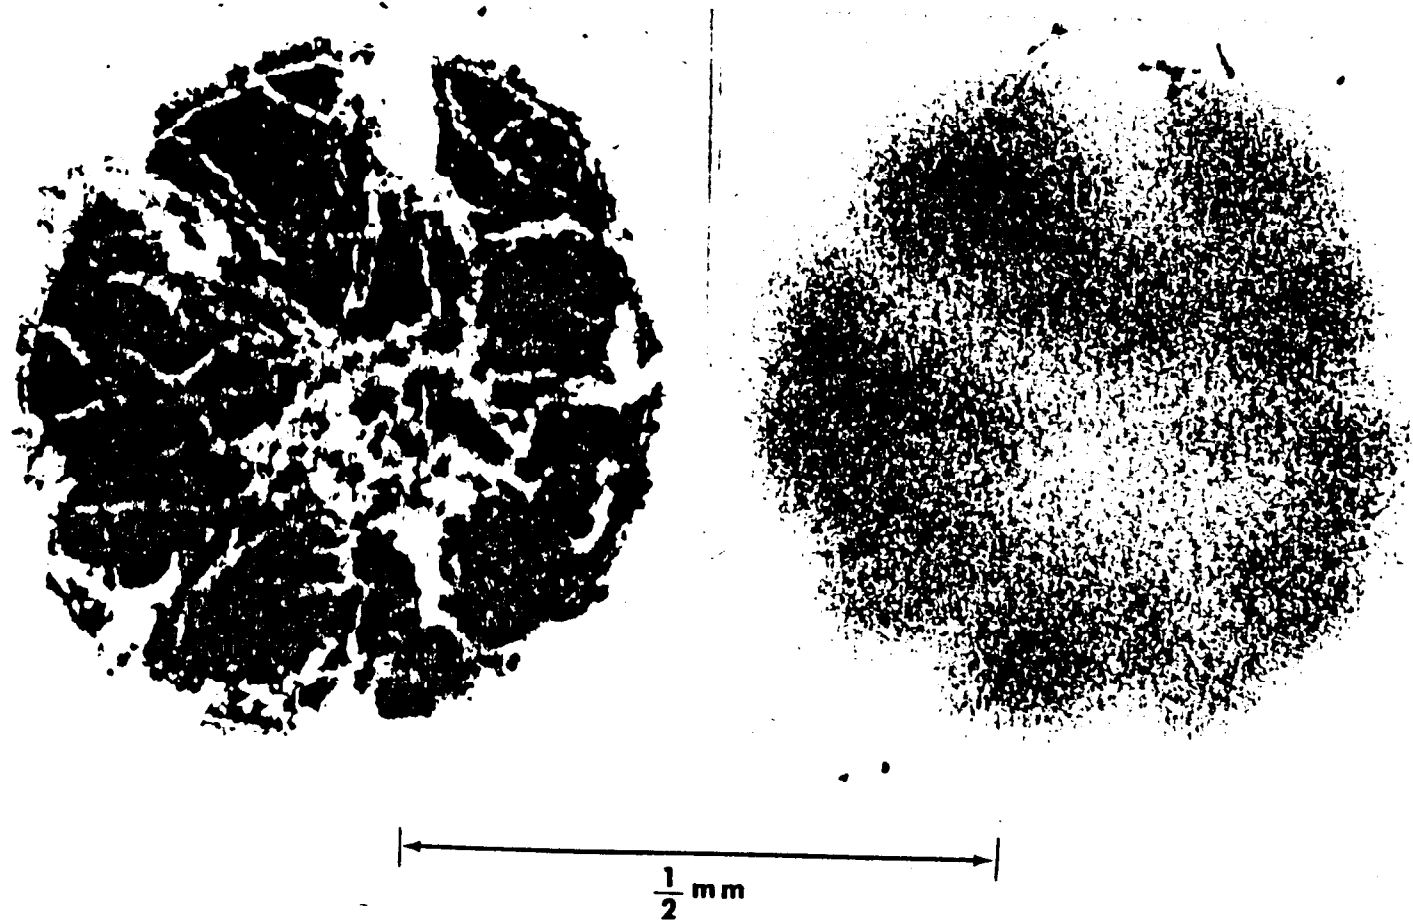


Figure 3.19 Thin section and radioautograph of spherical fallout particle, Shot Inca.

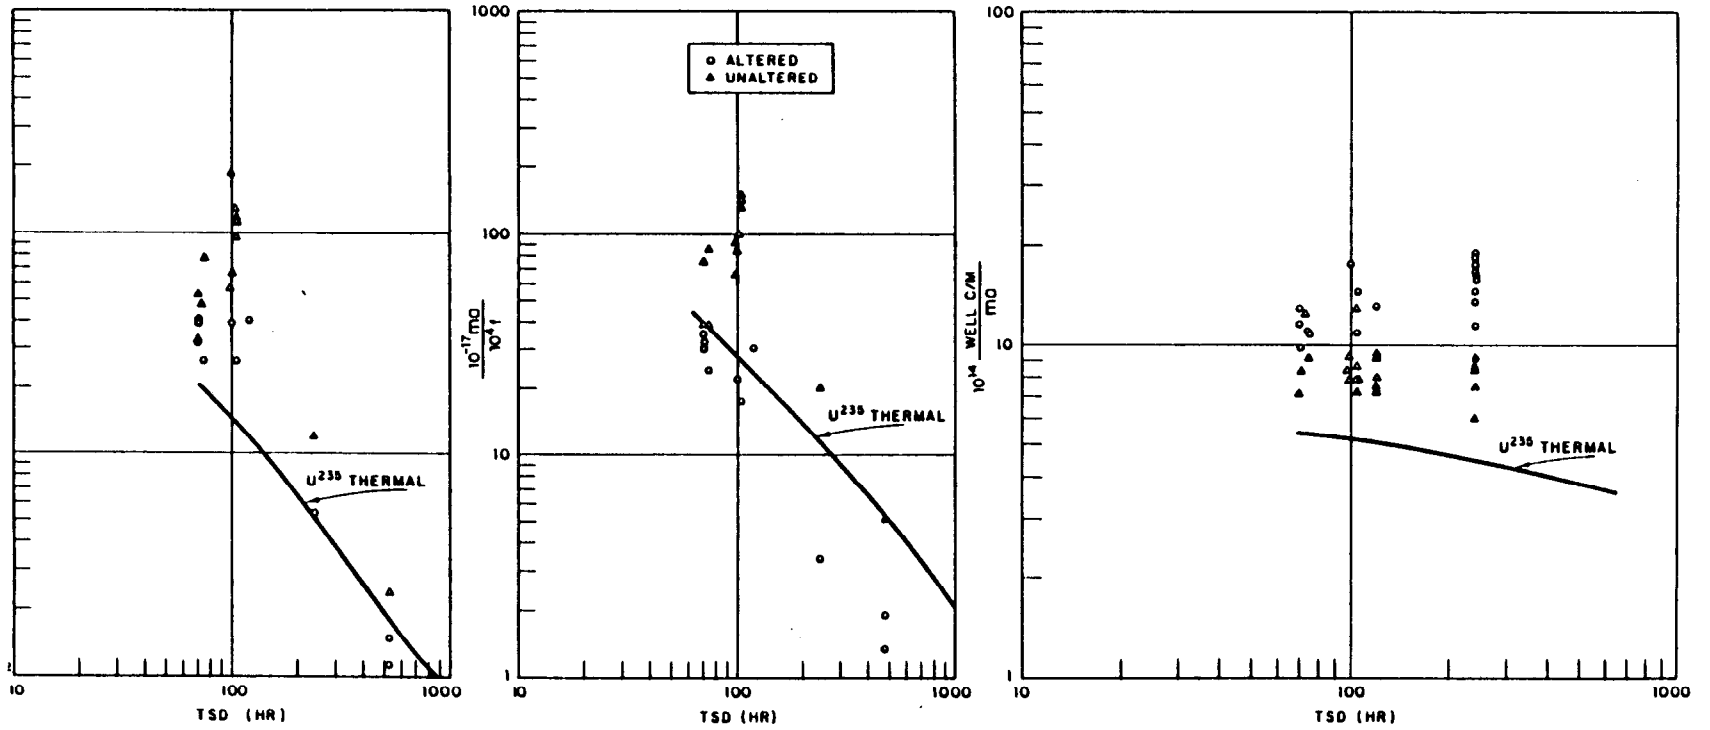


Figure 3.20 Energy-dependent activity ratios for altered and unaltered particles, Shot Zuni.

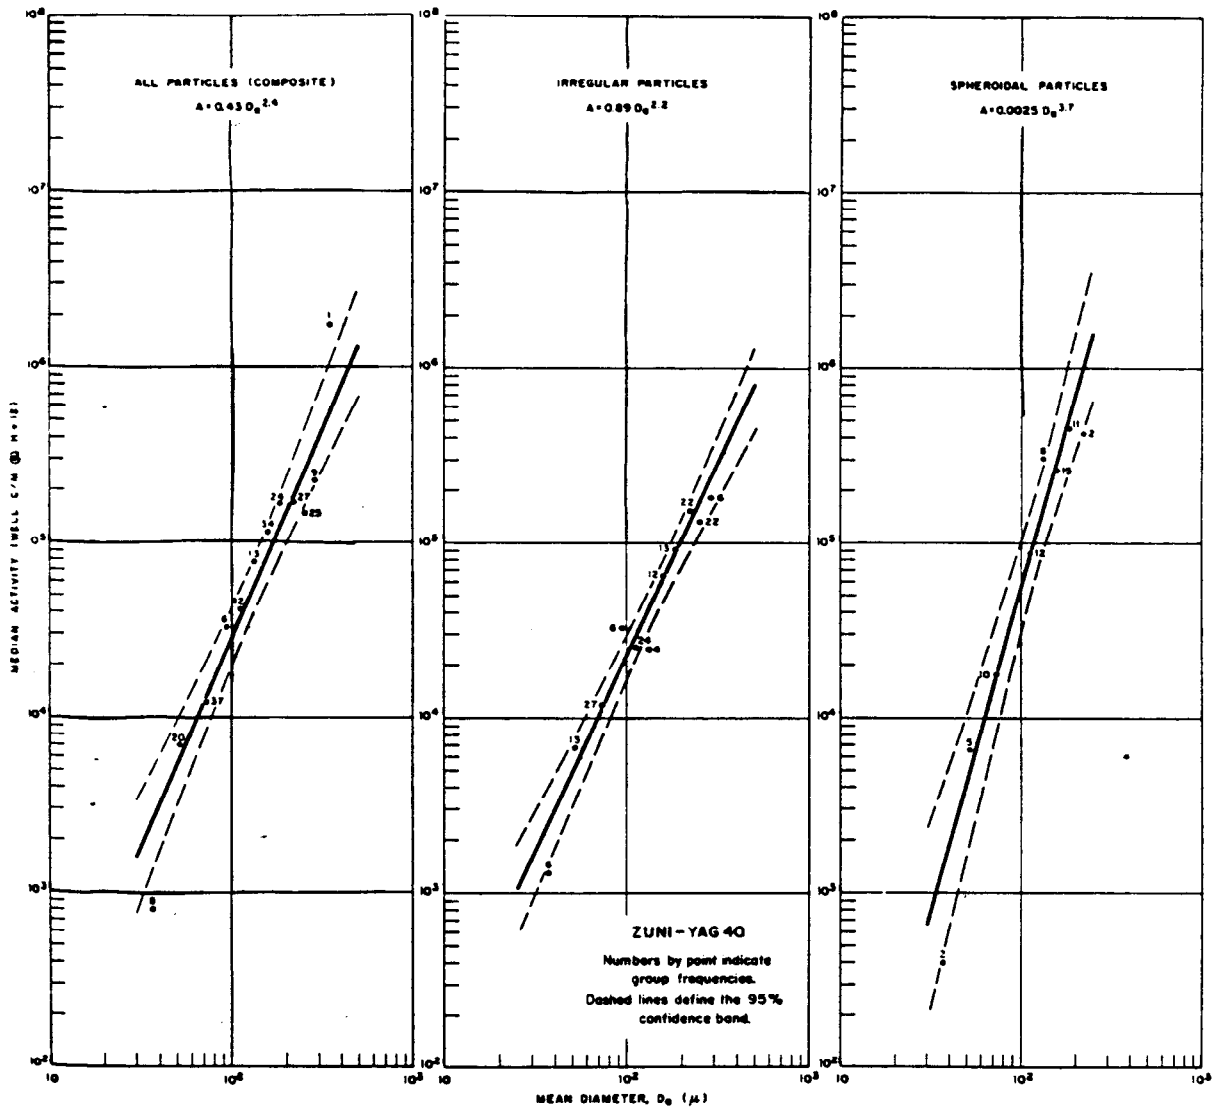


Figure 3.22 Particle group median activity versus mean size, Shot Zuni.

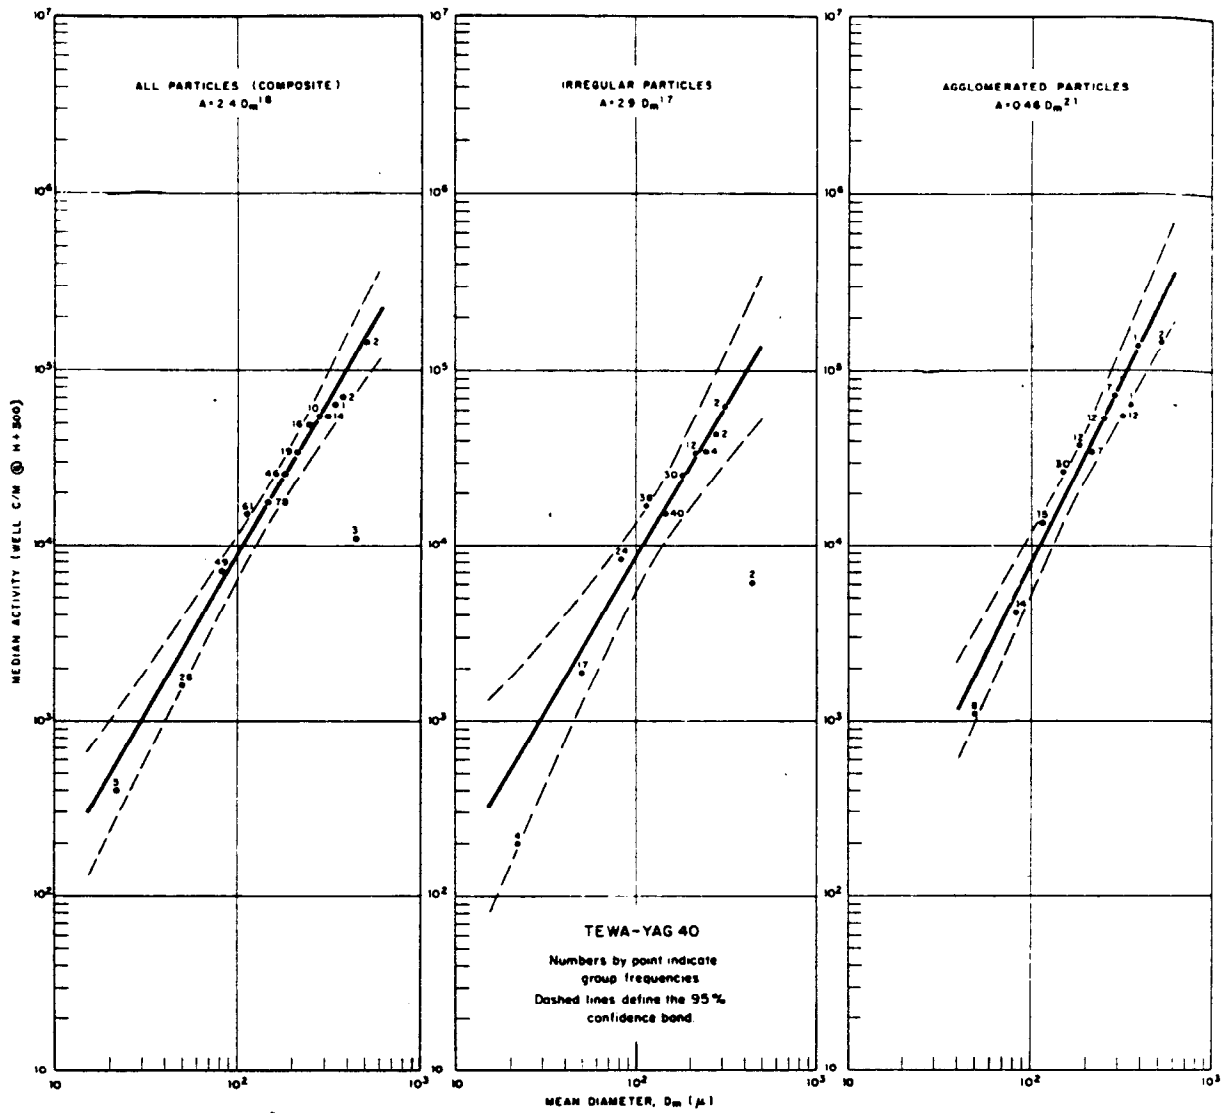


Figure 3.23 Particle group median activity versus mean size, Shot Tewa.

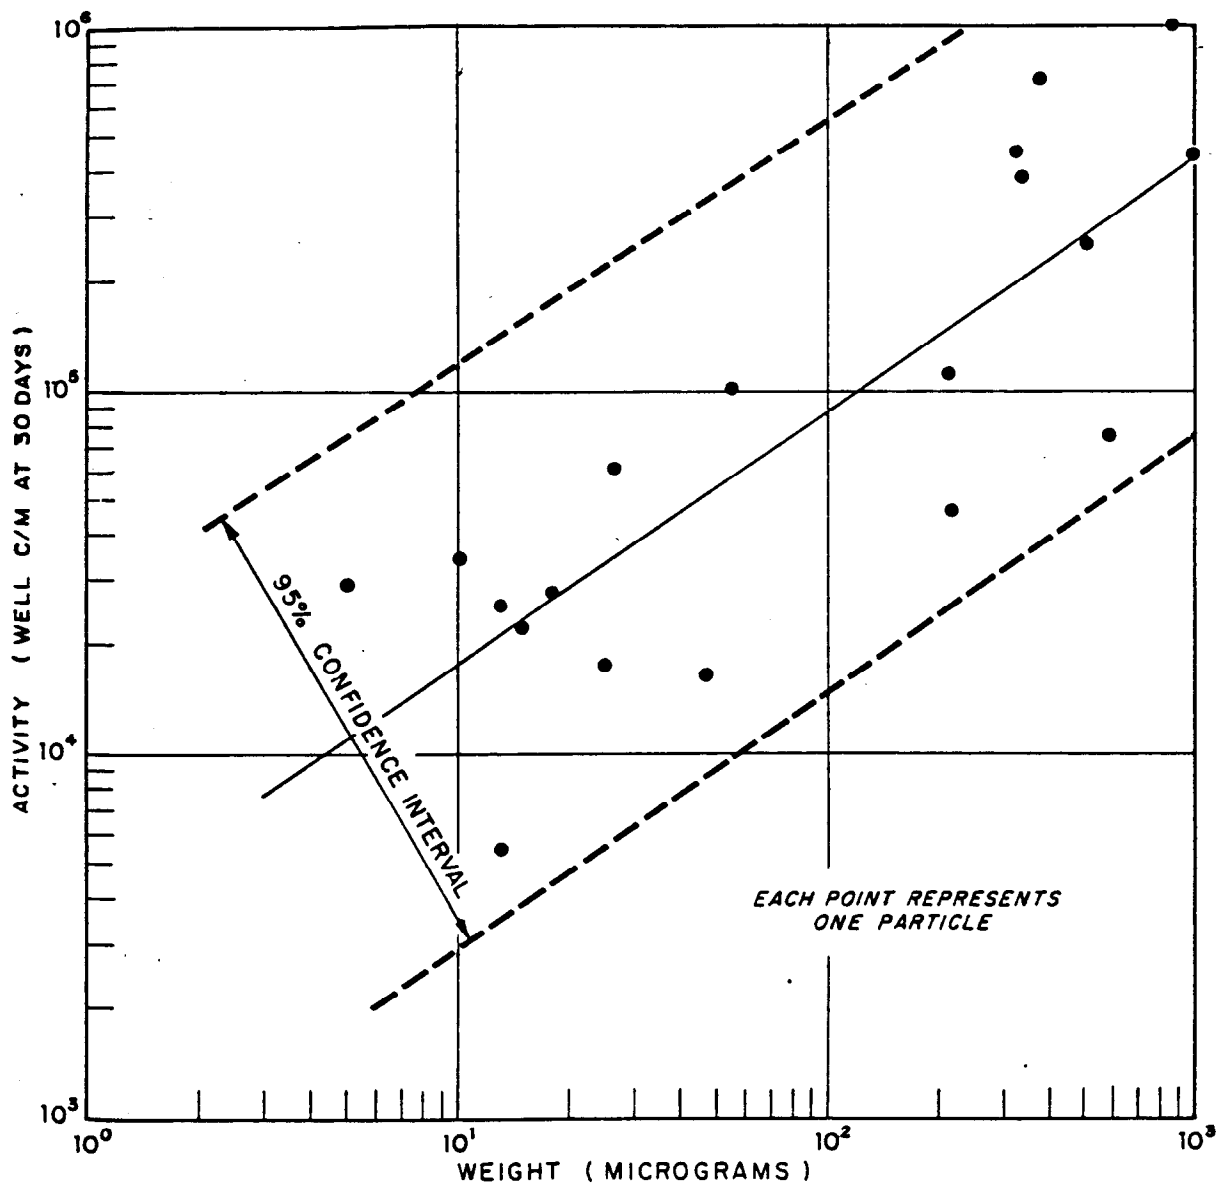


Figure 3.24 Relation of particle weight to activity, Shot Tewa.

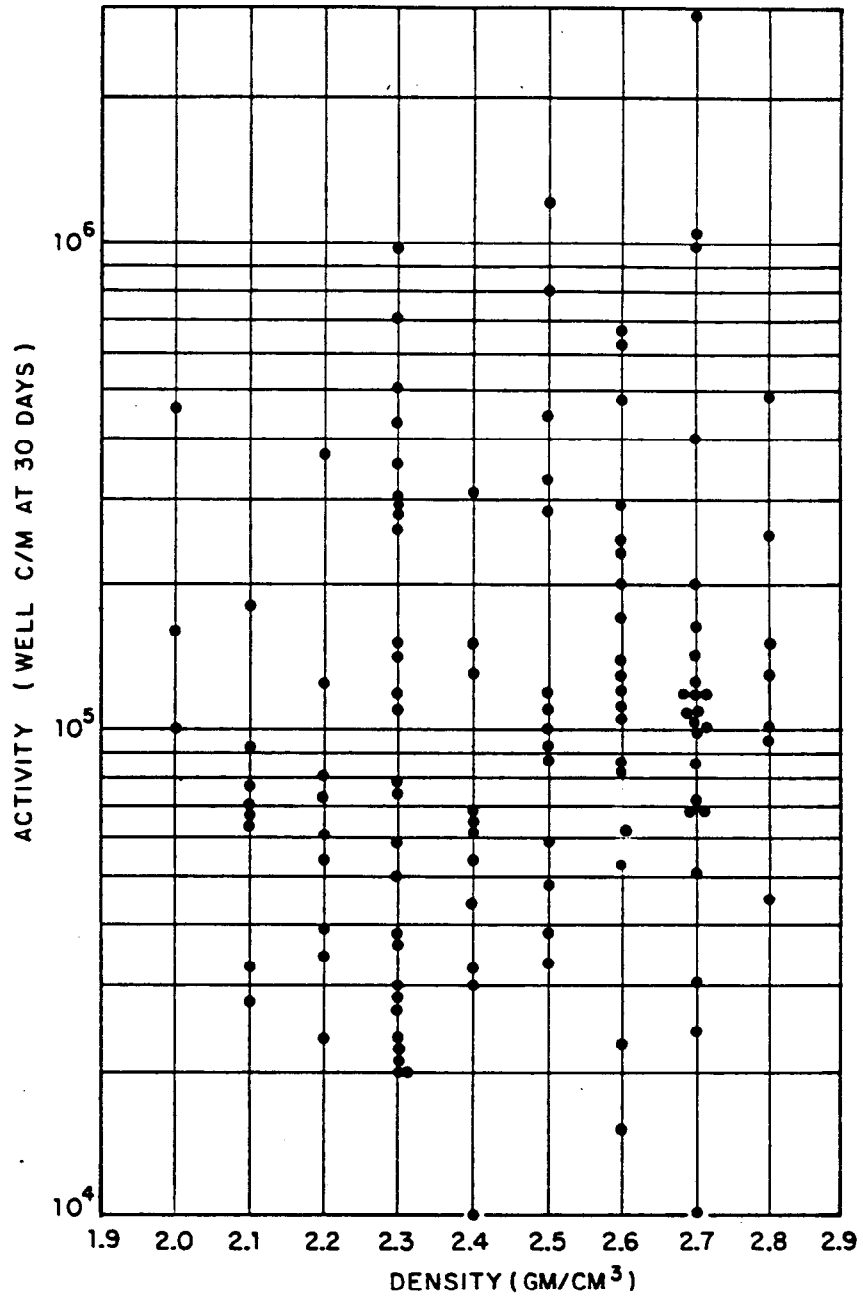


Figure 3.25 Relation of particle density to activity, Shot Zuni.

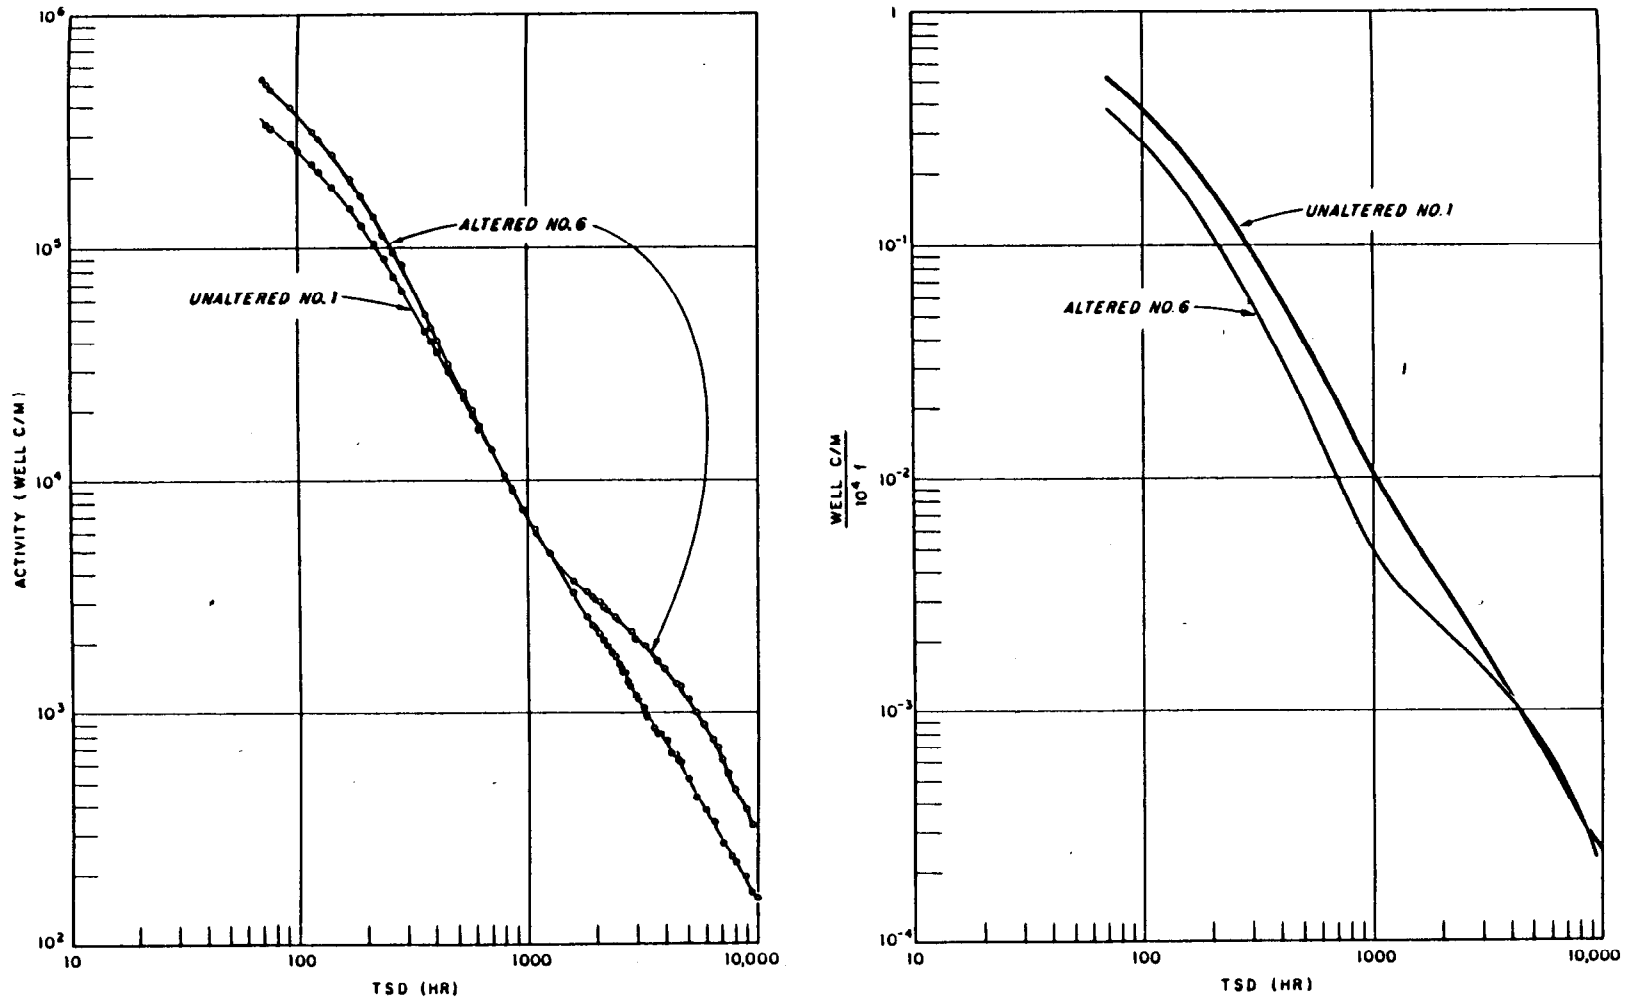


Figure 3.26 Gamma decay of altered and unaltered particles, Shot Zuni.

103

PAGE 102 DELETED

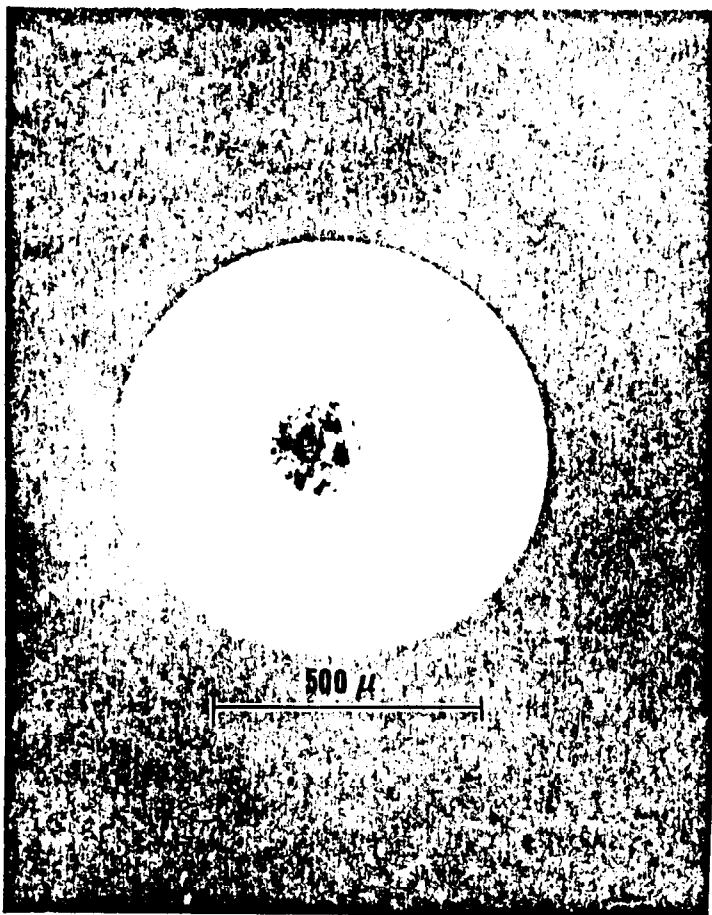


Figure 3.28 Photomicrograph of slurry-particle reaction area and insoluble solids.

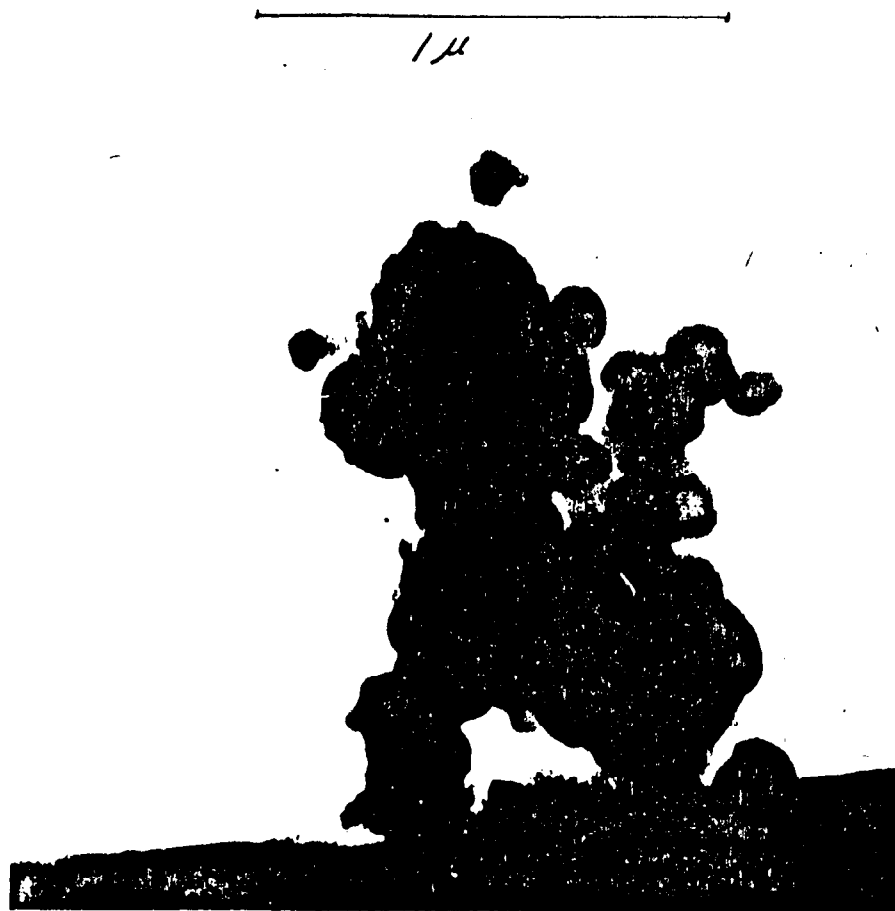


Figure 3.29 Electronmicrograph of slurry-particle insoluble solids.

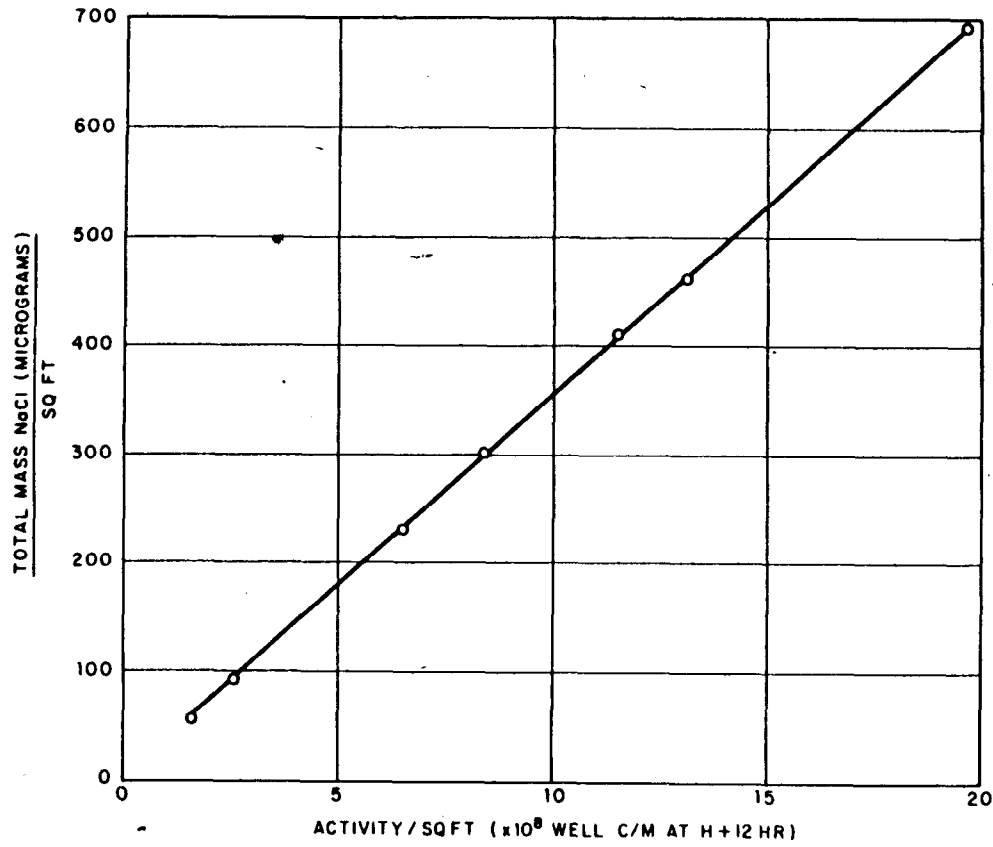


Figure 3.30 NaCl mass versus activity per square foot, Shot Flathead.



Figure 3.31 Radioautograph of slurry-particle trace and reaction area.

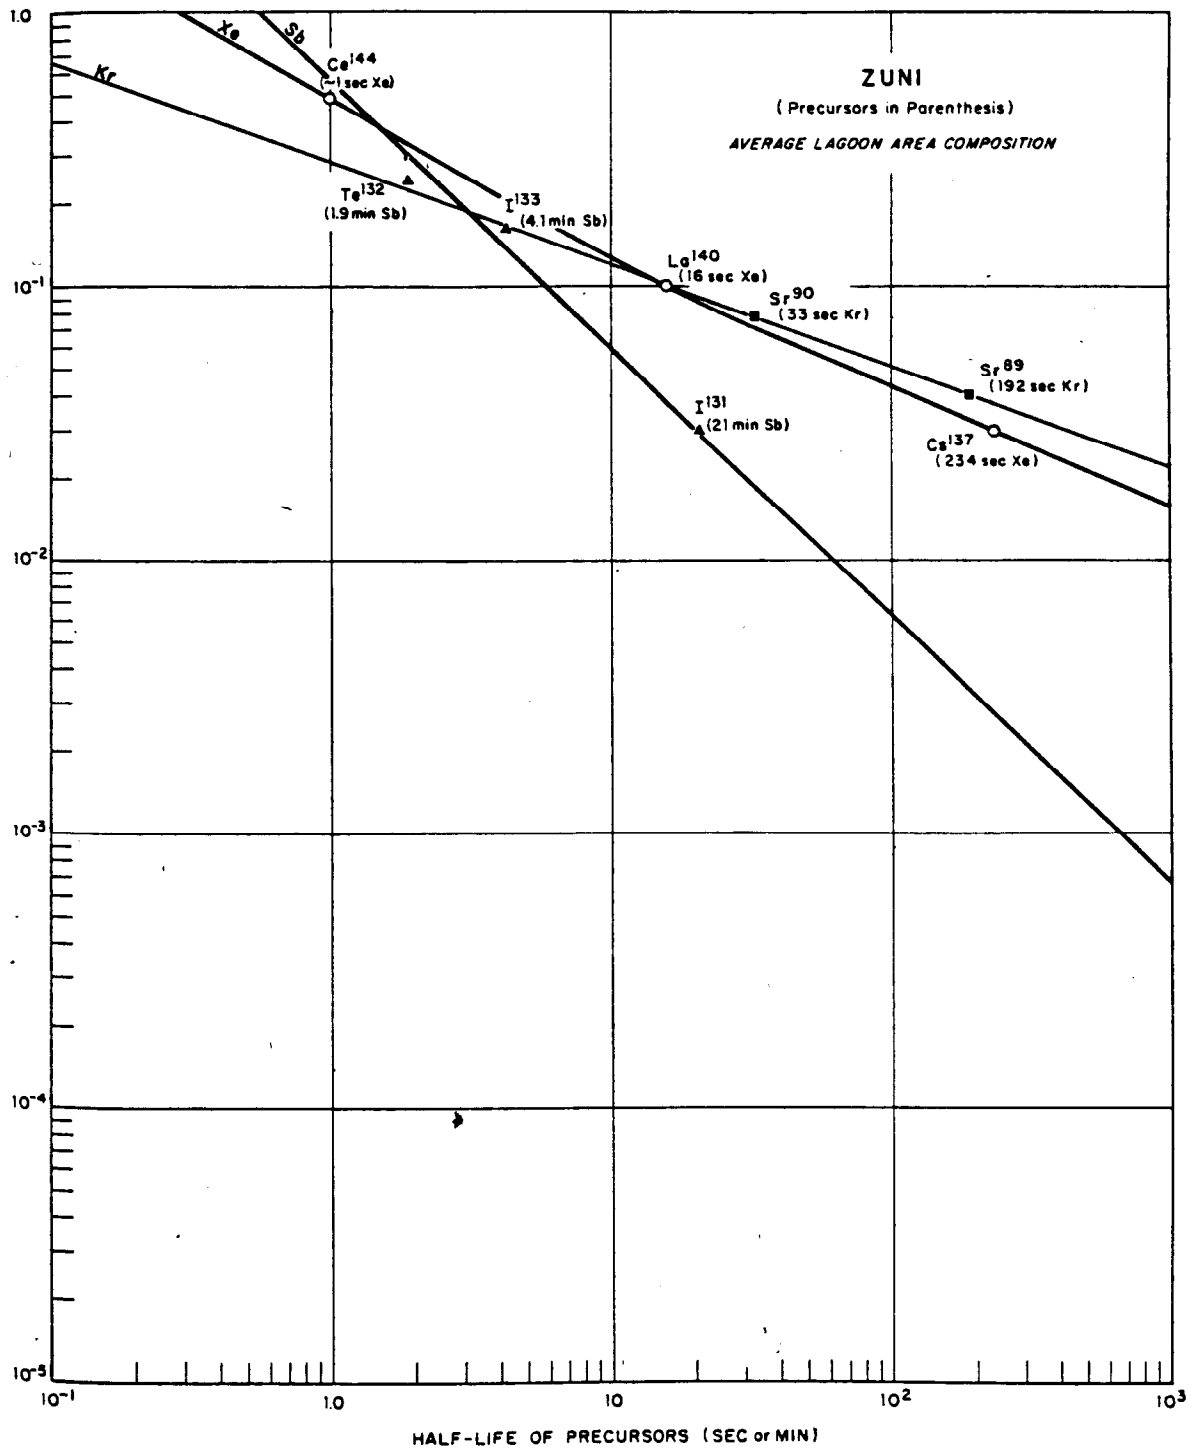


Figure 3.32 Radionuclide fractionation of xenon, krypton, and antimony products, Shot Zuni.

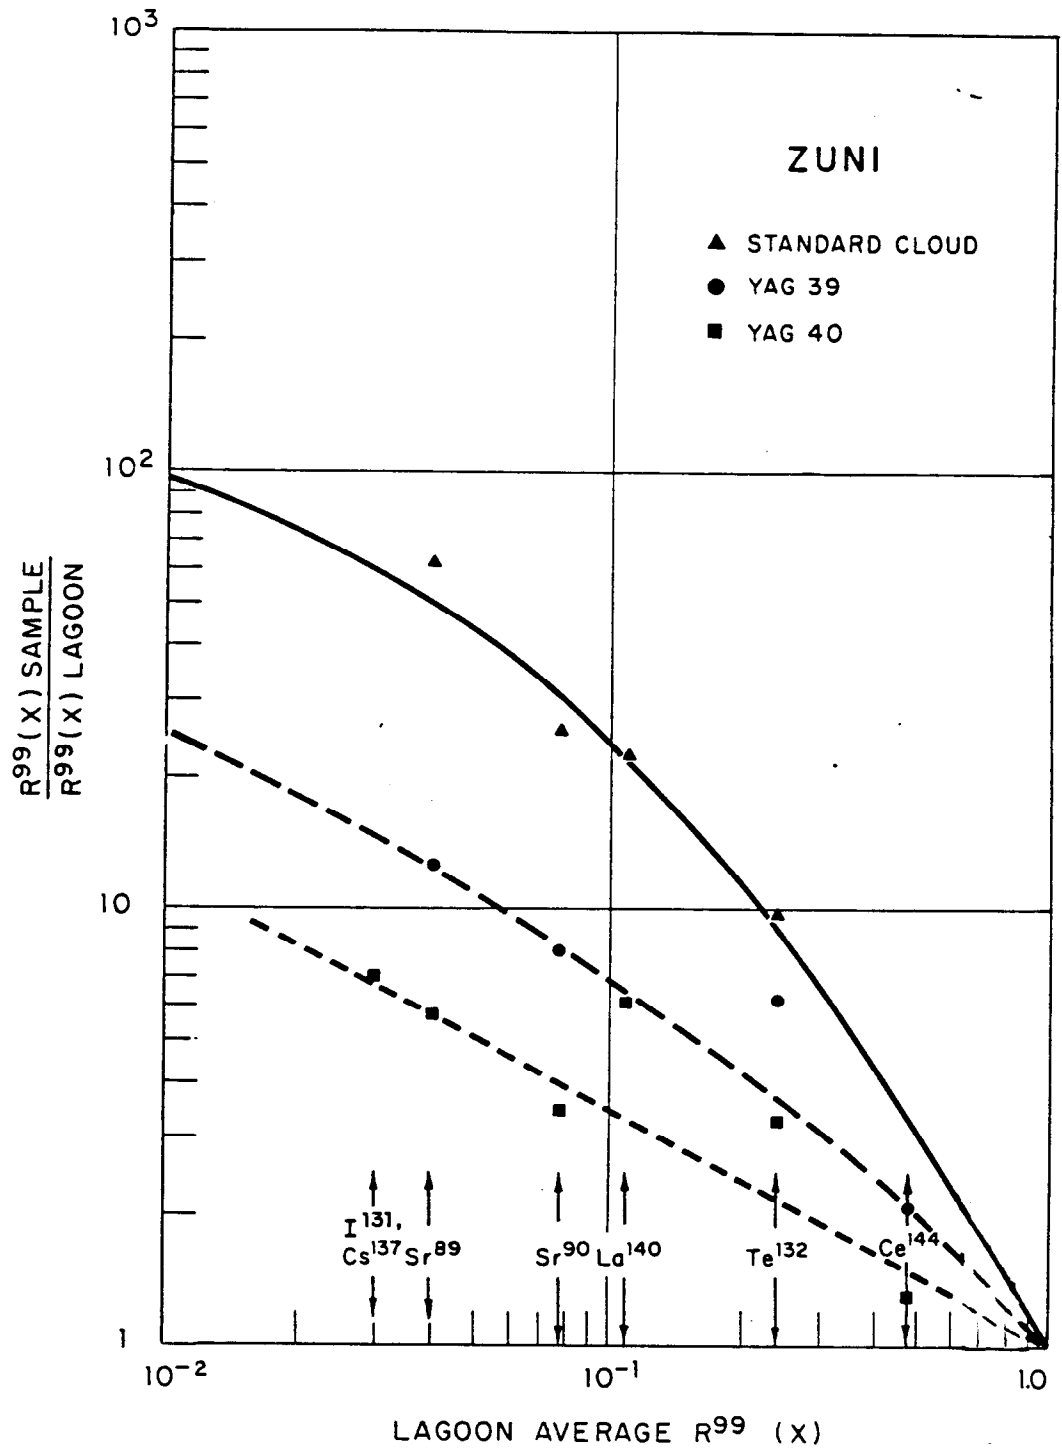


Figure 3.33 R-value relationships for several compositions, Shot Zuni.

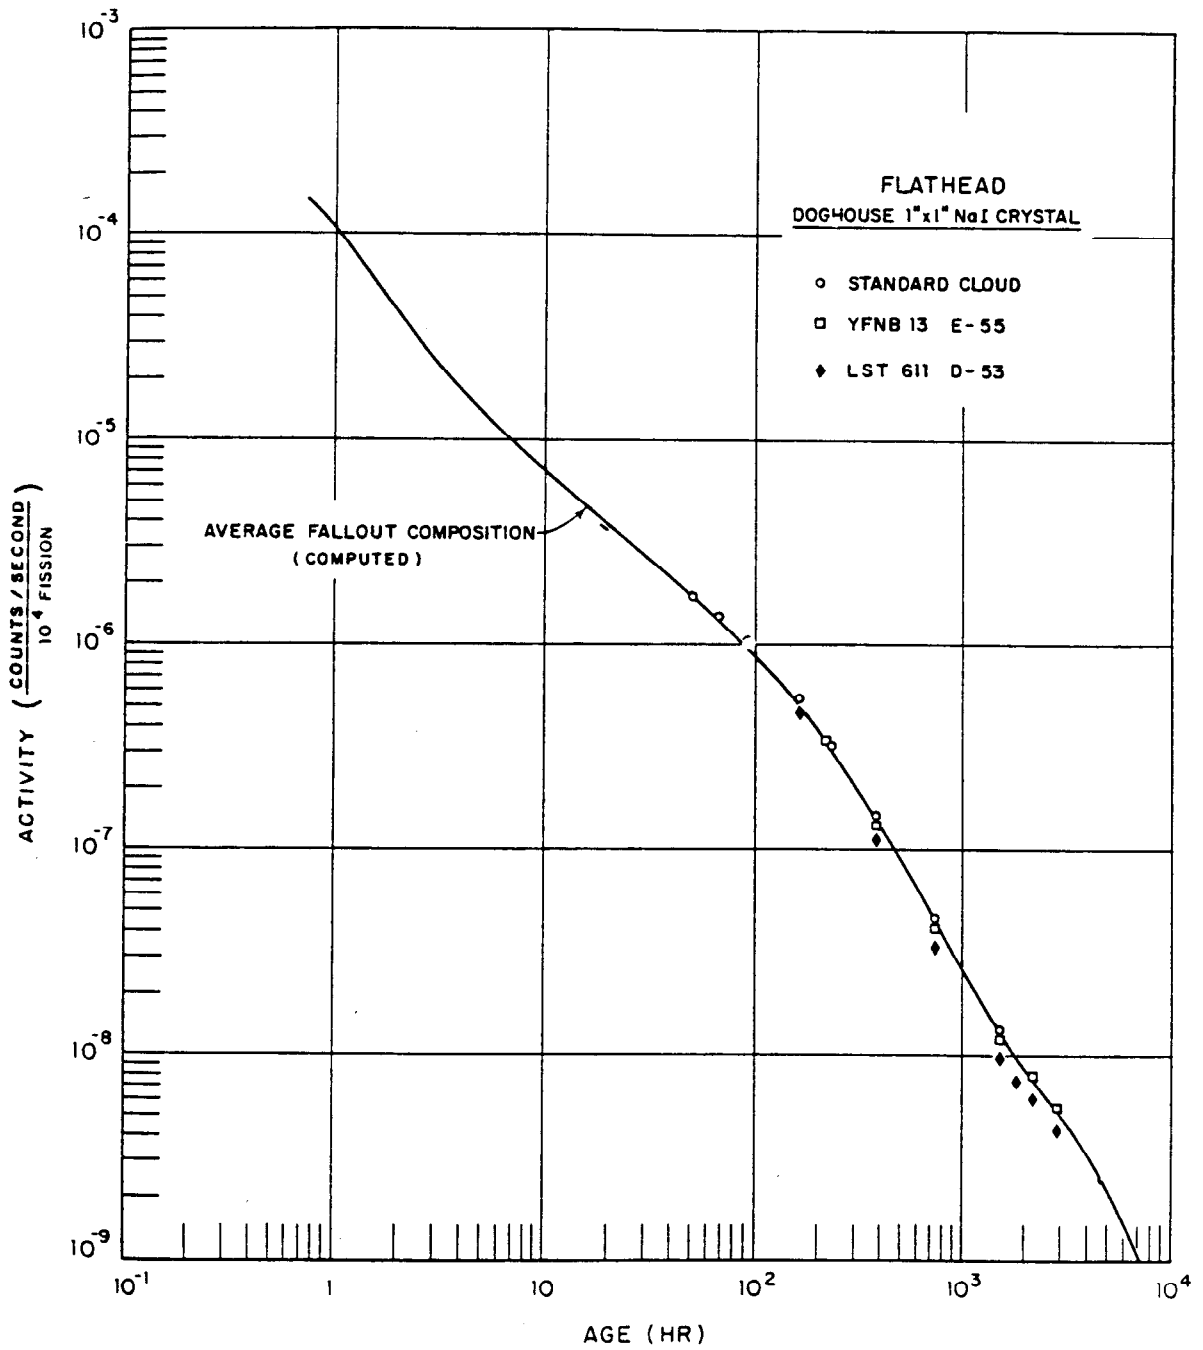


Figure 3.34 Photon-decay rate by doghouse counter, Shot Flathead.

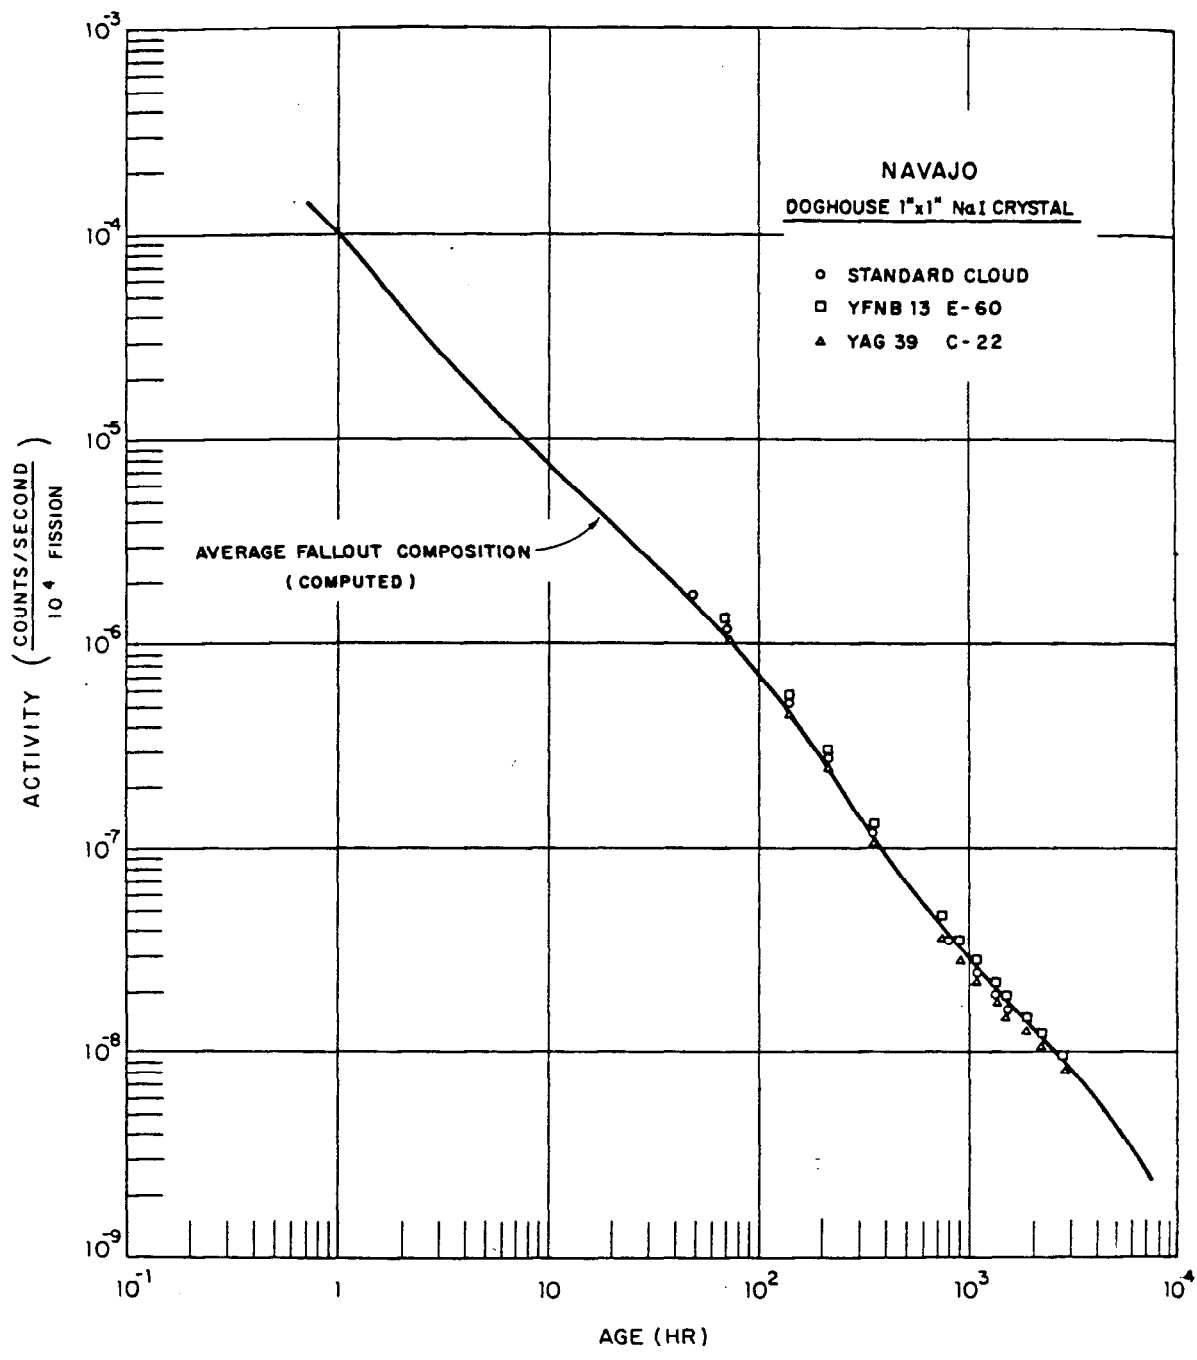


Figure 3.35 Photon-decay rate by doghouse counter, Shot Navajo.

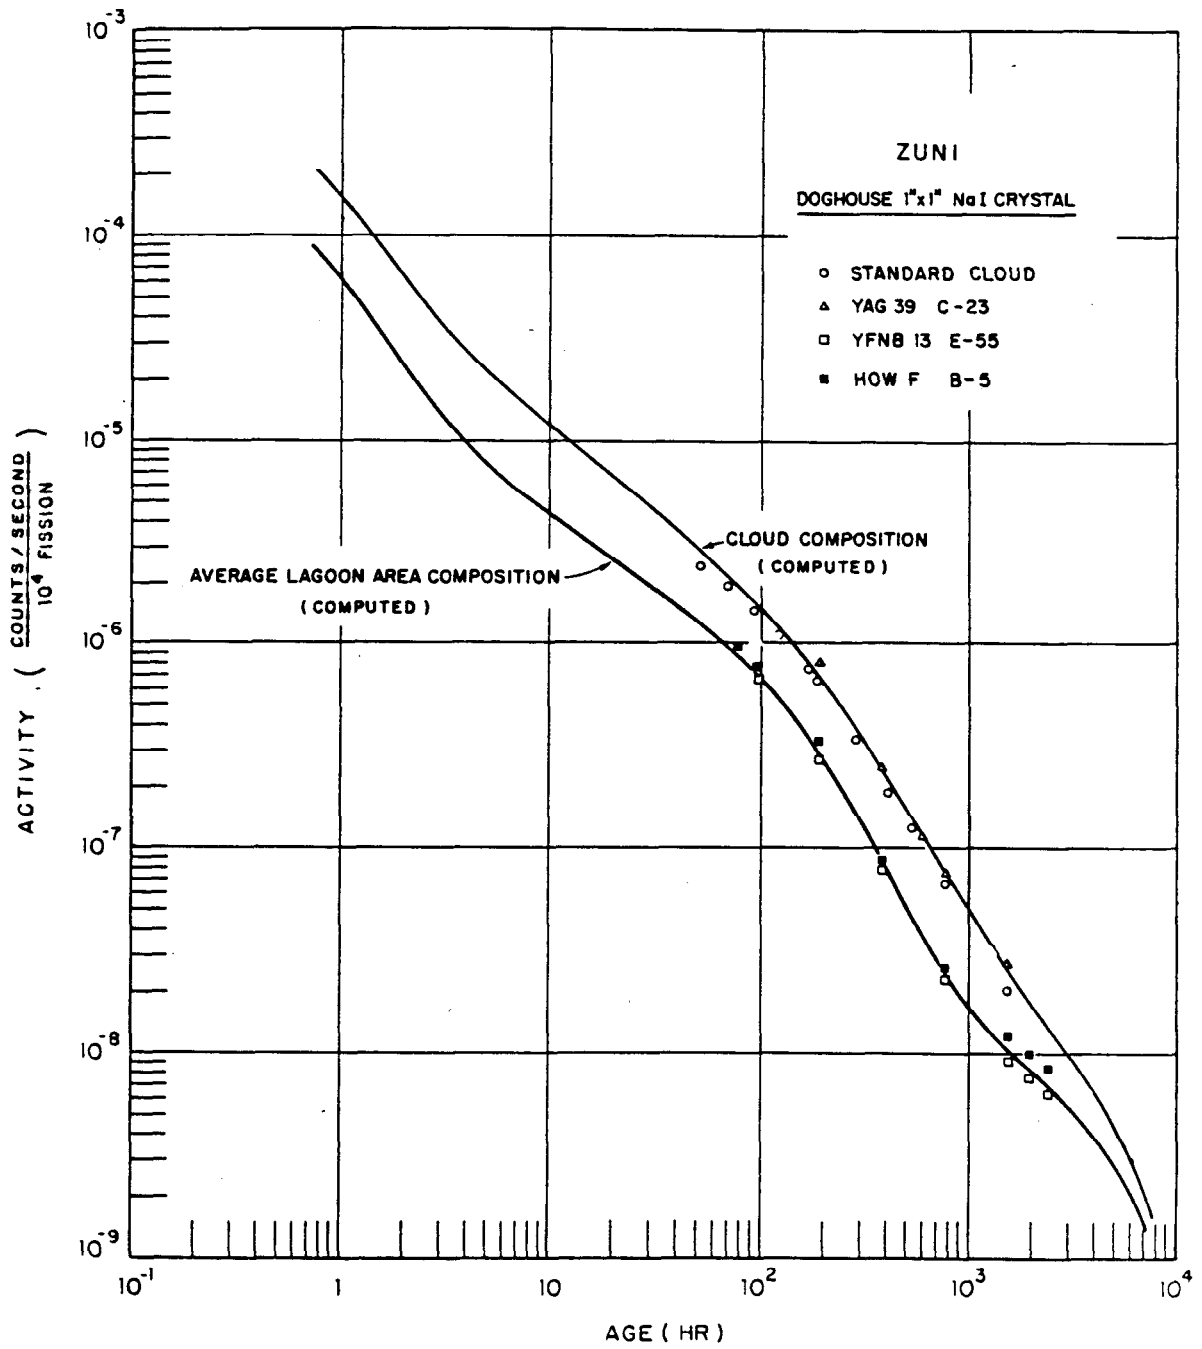


Figure 3.36 Photon-decay rate by doghouse counter, Shot Zuni.

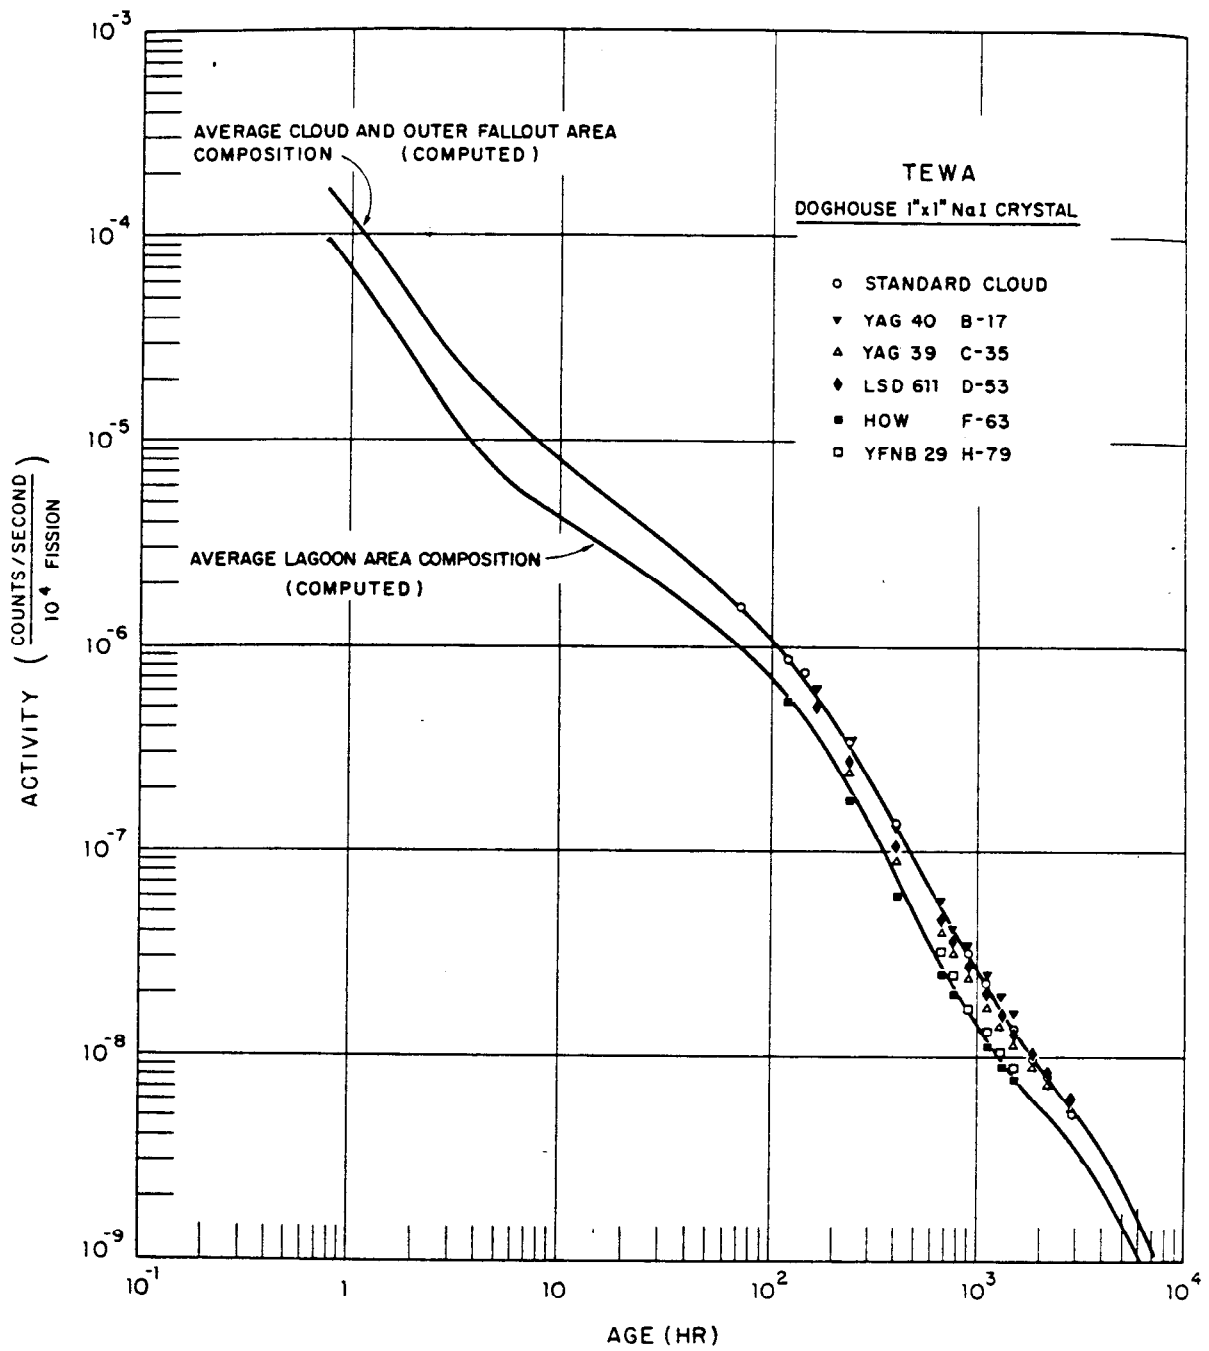


Figure 3.37 Photon-decay rate by doghouse counter, Shot Tewa.

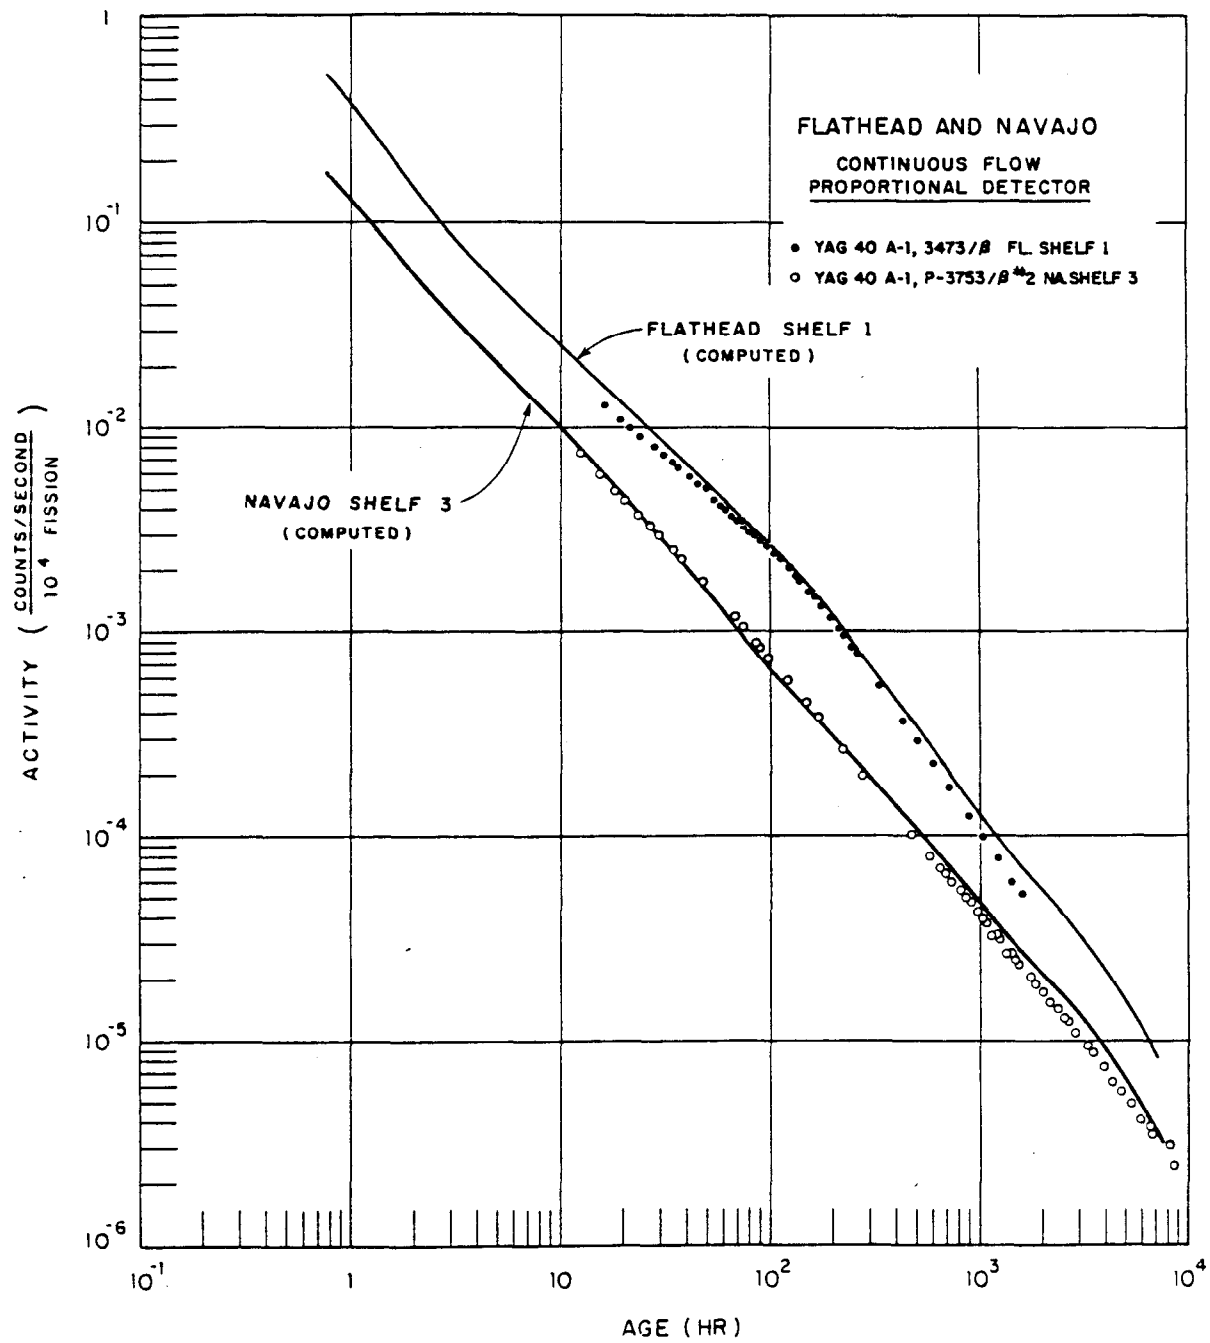


Figure 3.38 Beta-decay rates, Shots Flathead and Navajo.

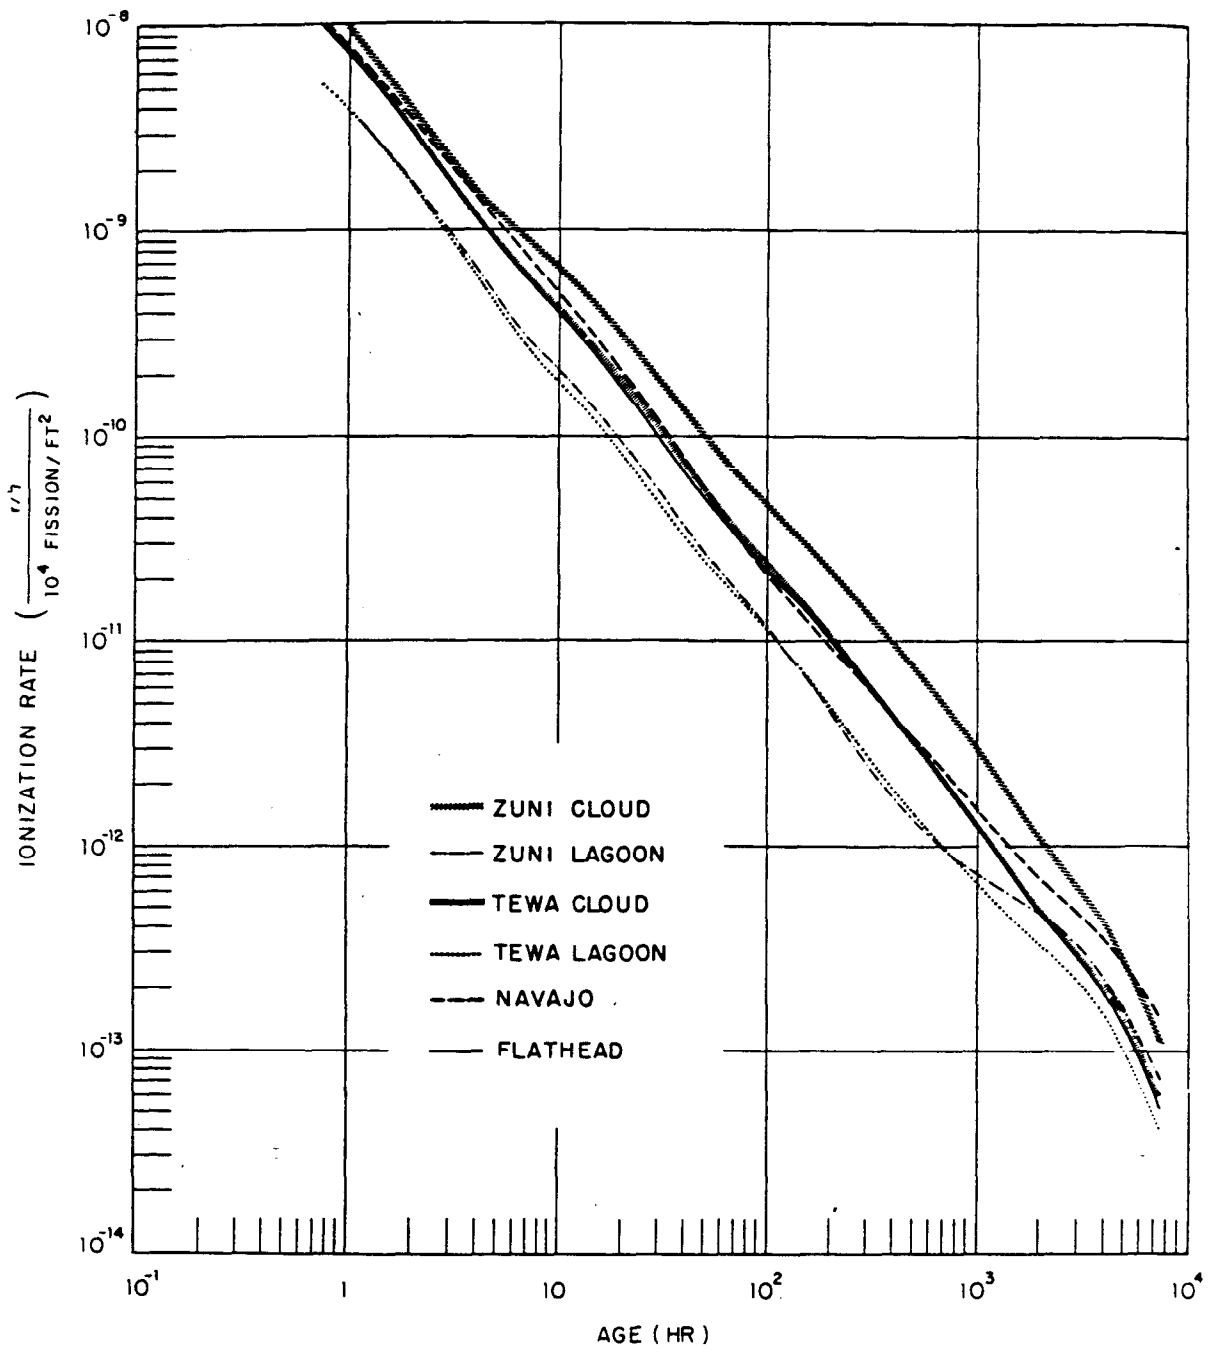


Figure 3.39 Computed ionization-decay rates, Shots Flathead, Navajo, Zuni, and Tewa.

Chapter 4

DISCUSSION

4.1 SHOT CHEROKEE

Because the residual radiation level from Shot Cherokee was too low to be of any military significance, the results were omitted from Chapter 3. However, this should not be interpreted to mean that no fallout occurred; the evidence is clear that very light fallout was deposited over a large portion of the predicted area.

Partly to obtain background data and provide a full-scale test of instrumentation and procedures, and partly to verify that the fallout was as light as anticipated, all stations were activated for the shot, and all exposed sampling trays were processed according to plan (Section 2.4). Small amounts of fallout were observed on the YAG 40 and YAG 39; the collectors removed from Skiffs AA, BB, CC, DD, GG, HH, MM, and VV were slightly active; and low levels of activity were also measured in two water samples collected by the SIO vessel DE 365. Results from all other stations were negative.

The approximate position of each station during the collection interval is shown in Figure 4.1; more exact locations for the skiffs and project ships are included in Tables 2.3 and 2.4. The boundaries of the fallout pattern predicted by the methods described in Section 4.3.1 are also given in the figure, and it may be seen that nearly all of the stations falling within the pattern received some fallout. (Skiff PP and the LST 611 probably do not constitute exceptions, because the former was overturned by the initial shock wave and the incremental collectors on the latter were never triggered.)

On the YAG 40, an increase in normal background radiation was detected with a survey meter at about H+6 hours, very close to the predicted time of fallout arrival. Although the ionization rate never became high enough for significant TIR measurements, open-window survey meter readings were continued until the level began to decrease. The results, plotted in Figure 4.2, show a broad peak of about 0.25 mr/hr centered roughly on H+9 hours. In addition, a few active particles were collected in two SIC and two IC trays during the same period; these results, expressed in counts per minute per minute as before (Section 3.2.1), are given in Figure 4.3. The spread along the time axis reflects the fact that the SIC trays were exposed for longer intervals than usual.

Radioautographs of the tray reagent films showed that all of the activity on each one was accounted for by a single particle, which appeared in every case to be a typical slurry droplet of the type described in Section 3.3.2. Successive gamma-energy spectra and the photon-decay rate of the most active tray (No. 729, ~6,200 counts/min at H+10 hours) were measured and are presented in Figures 4.4 and 4.5. The prominent peaks appearing at ~100 and 220 keV in the former appear to be due to Np^{239} .

A slight rise in background radiation was also detected with a hand survey meter on the YAG 39. The open-window level increased from about 0.02 mr/hr at H+10 hours to 0.15 mr/hr at H+12 hours, before beginning to decline. Only one IC tray was found to be active (No. 56 ~9,200 counts/min at H+10 hours), and this was the control tray exposed on top of the collector for 20 hours from 1300 on D-day to 0900 on D+1. Although about 25 small spots appeared on the reagent film, they were arranged in a way that suggested the breakup of one larger slurry particle on impact; as on the YAG 40 trays, only NaCl crystals were visible under low-power optics in the active regions.

Plots of the gamma-energy spectrum and decay for this sample are included in Figures 4.4 and 4.5; the similarities of form in both cases suggest a minimum of radionuclide fractionation.

By means of the Flathead conversion factor [$\sim 1.0 \times 10^6$ fissions/(dip counts/min at 100 hours)], the dip-counter results for the AOC's from the skiffs have been converted to fissions per square foot in Table 4.1, so that they may be compared with the values for the other shots (Table 3.15). The dip-counter activities of all water samples, including those for the DE 365, are summarized in Table B.32.

4.2 DATA RELIABILITY

The range and diversity of the measurements required for a project of this size virtually precludes the possibility of making general statements of accuracy which are applicable in all cases. Nevertheless, an attempt has been made in Table 4.2 to provide a qualitative evaluation of the accuracy of the various types of project measurements. Quantitative statements of accuracy, and sometimes precision, are given and referenced where available. No attempt has been made, however, to summarize the errors listed in the tables of results in the text; and certain small errors, such as those in station locations in the lagoon area and instrument exposure and recovery times, have been neglected.

Although the remaining estimates are based primarily on experience and judgment, comments have been included in most cases containing the principal factors contributing to the uncertainty. The following classification system is employed, giving both a quality rating and, where applicable, a probable accuracy range:

<u>Class</u>	<u>Quality</u>	<u>Accuracy Range</u>
A	Excellent	± 0 to 10 percent
B	Good	± 10 to 25 percent
C	Fair	± 25 to 50 percent
D	Poor	$\pm \geq 50$ percent
N	No information available	

4.3 CORRELATIONS

4.3.1 Fallout Predictions. As a part of operations in the Program 2 Control Center (Section 2.4), successive predictions were made of the location of the boundaries and hot line of the fallout pattern for each shot. (The hot line is defined in Reference 67 as that linear path through the fallout area along which the highest levels of activity occur relative to the levels in adjacent areas. The measured hot line in the figures was estimated from the observed contours, and the boundary established at the lowest isodose-rate line which was well delineated.) The final predictions are shown superimposed on the interim fallout patterns from Reference 13 in Figures 4.6 through 4.9. Allowance has been made for time variation of the winds during Shots Flathead and Navajo, and for time and space variation during Shots Zuni and Tewa. Predicted and observed times of fallout arrival at most of the major stations, as well as the maximum particle sizes predicted and observed at times of arrival, peak, and cessation, are also compared in Table 4.3. The marked differences in particle collections from close and distant stations are illustrated in Figure 4.10. In the majority of cases, agreement is close enough to justify the assumptions used in making the predictions; in the remaining cases, the differences are suggestive of the way in which these assumptions should be altered.

The fallout-forecasting method is described in detail in Reference 67. This method begins with a vertical-line source above the shot point, and assumes that all particle sizes exist at all altitudes; the arrival points of particles of several different sizes (75, 100, 200, and 350 microns in diameter in this case), originating at the centers of successive 5,000-foot altitude increments are then plotted on the surface. The measured winds are used to arrive at single vectors representative of the winds in each layer, and these vectors are applied to the particle for the period of time required for it to fall through the layer. The required times are calculated from

equations for particle terminal velocity, of the form described by Dallavalle. Such equations consider the variables of particle density, air density, particle diameter, air viscosity, and constants incorporating the effects of gravity and particle shape. (Modified versions of the original Dallavalle equations are presented in Reference 67; data on the Marshall Islands atmosphere required to evaluate air density and air viscosity are also given in this reference.) The last two steps are simplified, however, by the use of a plotting template, so designed that vectors laid off in the wind direction, to the wind speed, automatically include terminal velocity adjustments (Reference 68).

Size lines result from connecting the surface-arrival points for particles of the same size from increasing increments of altitude; height lines are generated by connecting the arrival points of particles of different sizes from the same altitudes. These two types of lines form a network from which the arrival times of particles of various sizes and the perimeter of the fallout pattern may be estimated, once the arrival points representing the line source have been expanded to include the entire cloud diameter. This last step requires the use of a specific cloud model. The model that was used in arriving at the results of Figures 4.6 through 4.9 and Table 4.3 is shown in Figure 4.11. Particles larger than 1,000 microns in diameter were restricted to the stem radius, or inner 10 percent of the cloud radius, while those from 500 to 1,000 microns in diameter were limited to the inner 50 percent of the cloud radius; all particle sizes were assumed to be concentrated primarily in the lower third of the cloud and upper third of the stem.

The dimensions shown in the figures were derived from empirical curves available in the field, relating cloud height and diameter to device yield (Reference 67). Actual photographic measurements of the clouds from Reference 69 were used wherever possible, however, for subsequent calculations leading to results tabulated in Table 4.3.

The location of the hot line follows directly from the assumed cloud model, being determined by the height lines from the lower third of the cloud, successively corrected for time and, sometimes, space variation of the winds. Time variation was applied in the field in all cases, but space variation later and only in cases of gross disagreement. The procedure generally followed was to apply the variation of the winds in the case of the 75- and 100-micron particles and use shot-time winds for the heavier particles. Wind data obtained from balloon runs at 3-hour intervals by the Task Force were used both to establish the initial shot-time winds and make the corrections for time and space variation. The calculations for Shot Zuni are summarized for illustrative purposes in Table B.29.

It is of particular interest to note that it was necessary to consider both time and space variation of the winds for Shots Zuni and Tewa in order to bring the forecast patterns into general agreement with the measured patterns. Vertical air motions were considered for Shot Zuni but found to have little effect on the overall result. It is also of interest to observe that the agreement achieved was nearly as good for Shots Flathead and Navajo with no allowance for space variation as for Shots Zuni and Tewa with this factor included, in spite of the fact that the fallout from the former consisted of slurry rather than solid particles below the freezing level (Sections 3.3.1 and 3.3.2). Whether this difference can be attributed to the gross differences in the nature of the fallout is not known.

4.3.2 Sampling Bias. When a solid object such as a collecting tray is placed in a uniform air stream, the streamlines in its immediate vicinity become distorted, and small particles falling into the region will be accelerated and displaced. As a result, a nonrepresentative or biased sample may be collected. Although the tray will collect a few particles that otherwise would not have been deposited, the geometry is such that a larger number that would have fallen through the area occupied by the tray will actually fall elsewhere. In an extreme case of small, light particles and high wind velocity, practically all of the particles could be deposited elsewhere, because the number deposited elsewhere generally increases with increasing wind velocity and decreasing particle size and density.

This effect has long been recognized in rainfall sampling, and some experimental collectors have been equipped with a thin horizontal windshield designed to minimize streamline distortion

(Reference 72). The sampling of solid fallout particles presents even more severe problems, however, because the particles may also blow out of the tray after being collected, producing an additional deficit in the sample.

In addition, samples collected in identical collectors located relatively close together in a fixed array have been found to vary with the position of the collector in the array and its height above the ground (References 10 and 72). It follows from such studies that both duplication and replication of sampling are necessary to obtain significant results.

Consideration was given to each of these problems in the design of the sampling stations. An attempt was made to minimize and standardize streamline distortion by placing horizontal windshields around all major array platforms and keeping their geometries constant. (The flow characteristics of the standard platform were studied both by small-scale wind-tunnel tests and measurements made on the mounted platform prior to the operation (Reference 73). It was found that a recirculatory flow, resulting in updrafts on the upwind side and downdrafts on the downwind side, developed inside the platform with increasing wind velocity, leading to approximately the same streamline distortion in every case.) Similar windshields were used for the SIC on the YAG 40 and the decay probe tank on the YAG 39, and funnels were selected for the minor array collectors partly for the same reason.

Honeycomb inserts, which created dead-air cells to prevent loss of material, were used in all OCC and AOC collectors. This choice represented a compromise between the conflicting demands for high collection efficiency, ease of sample removal, and freedom from adulterants in subsequent chemical and radiochemical analyses.

Retentive grease surfaces, used in the IC trays designed for solid-particle sampling, facilitated single-particle removal.

All total collectors were duplicated in a standard arrangement for the major arrays; and these arrays, like the minor arrays, were distributed throughout the fallout area and utilized for all shots to provide adequate replication.

At the most, such precautions make it possible to relate collections made by the same kind of sampling arrays; they do not insure absolute, unbiased collections. In effect, this means that, while all measurements made by major arrays may constitute one self-consistent set, and those made by minor arrays another, it is not certain what portion of the total deposited fallout these sets represent. As explained earlier (Section 3.1), this is one reason why radiological properties have been expressed on a unit basis wherever possible. Efforts to interpret platform collections include a discussion and treatment of the relative bias observed within the platforms, as well as comparisons of the resulting platform values with buried-tray and minor array collections on How Island, water sampling and YAG 39 tank collections, and a series of postoperation rainfall measurements made at NRDL.

Relative Platform Bias. The amount of fallout collected by the OCC and AOC₁ collectors in the upwind part of the standard platform was lower than that collected in the downwind portion. It was demonstrated in Reference 74 that these amounts usually varied symmetrically around the platform with respect to wind direction, and that the direction established by the line connecting the interpolated maximum and minimum collections (observed bias direction) coincided with the wind direction. A relative wind varying with time during fallout was treated by vectorial summation, with the magnitude of each directional vector proportional to the amount of fallout occurring in that time. (Variations in the relative wind were caused principally by ship maneuvers, or by oscillation of the anchored barges under the influence of wind and current; directions varying within ± 15 degrees were considered constant.) The resulting collection pattern with respect to the weighted wind resultant (computed bias direction) was similar to that for a single wind, although the ratio of the maximum to the minimum collection (bias ratio) was usually nearer unity, and the bias direction correspondingly less certain.

The variability in relative-wind direction and fallout rate, which could under certain conditions produce a uniform collection around the platform, may be expressed as a bias fraction (defined in Reference 74 as the magnitude of the resultant vector mentioned above divided by the arithmetic sum of the individual vector magnitudes). In effect, this fraction represents a measure of the degree of single-wind deposition purity, because the bias fraction in such a case

would be 1; on the other hand, the resultant vector would vanish for a wind that rotated uniformly around the platform an integral number of times during uniform fallout, and the fraction would be 0.

Where necessary, the mean value of the four OCC and two AOC₁ collectors was chosen as representative for a platform; but when a curve of fallout amount versus angular displacement from the bias direction could be constructed using these collections, the mean value of the curve was obtained from 10 equispaced values between 0 and 180 degrees. The latter applied to all platforms except the LST 611 and the YFNB's, probably indicating disturbances of the air stream incident on the platform by the geometry of the carrier vessel. These platforms, however, were mounted quite low; while the YAG platforms were high enough and so placed as to virtually guarantee undisturbed incidence for all winds forward of the beam.

Pertinent results are summarized in Table 4.4. Fallout amounts per collector are given as doghouse-counter activities at 100 hours, convertible to fissions by the factors given in Table B.13; the mean values so converted appear in Table 3.15. Wind velocities are listed in Table B.37; as in the summary table, the directions given are true for How Island and relative to the bow of the vessel for all other major stations.

No attempt was made to account quantitatively for the values of the bias ratio observed, even for a single-wind system; undoubtedly, the relative amount deposited in the various parts of the platform depends on some function of the wind velocity and particle terminal velocity. As indicated earlier, the airflow pattern induced by the platform itself appeared to be reproducible for a given wind speed, and symmetrical about a vertical plane parallel with the wind direction. Accordingly, for a given set of conditions, collections made on the platform by different instruments with similar intrinsic efficiencies will vary only with location relative to the wind direction. Further experimentation is required to determine how the collections are related to a true ground value for different combinations of particle characteristics and wind speeds.

A limited study of standard-platform bias based on incremental collector measurements was also made, using the data discussed in Section 3.2.4 (Reference 19). These results are presented in Figures 4.12, 4.13, and 4.14. The first compares particle-size frequency distributions of collections made at the same time by different collectors located at the same station; studies for the YAG 39 and YAG 40 during Shots Zuni and Tewa are included. The second compares the total relative mass collected as a function of time, and the variation of relative mass with particle size, for different collectors located at the same station; as above, YAG 39 and YAG 40 collections during Shots Zuni and Tewa were used. The last presents curves of the same type given in Section 3.2.4 for the two IC's located on the upwind side of the YAG 39 platform; these may be compared with the curves in Figure 3.8 which were derived from the IC on the downwind side.

The results show that, except at late times, the overall features of collections made by different instruments at a given station correspond reasonably well, but that appreciable differences in magnitude may exist for a particular time or particle size. In the case of collections made on a single platform (YAG 39), the differences are in general agreement with the bias curves discussed above; and these differences appear to be less than those between collections made near the deck and in the standard platform (A-1 and B-7, YAG 40). It is to be noted that incremental-collector comparisons constitute a particularly severe test of bias differences because of the small size (~0.0558 ft²) of the collecting tray.

How Island Collections. One of the primary purposes of the Site How station was to determine the overall collection efficiency of the total collectors mounted in the standard platform. An area was cleared on the northern end of the island, Platform F with its supporting tower was moved from the YFNB 13 to the center of this area, and 12 AOC₁ trays were filled with local soil and buried in a geometrical array around the tower with their collecting surfaces flush with the ground (Figure 2.8). After every shot, the buried trays were returned to NRDL and counted in the same manner as the OCC trays from the platform.

It is assumed that the collections of these buried trays represent a near-ideal experimental approach to determining the amount of fallout actually deposited on the ground. (Some differences, believed minor, were present in OCC and AOC₁-B doghouse-counter geometries. Very

little differential effect is to be expected from a lamina of activity on top of the 2 inches of sand versus activity distributed on the honeycomb insert and bottom of the tray. The more serious possibility of the active particles sifting down through the inert sand appears not to have occurred, because the survey-meter ratios of $\text{AOC}_1\text{-B's}$ to OCC's taken at Site Nan, Site Elmer, and NRDL did not change significantly with time.)

In Table 4.5, weighted-mean platform values, obtained as described above, are converted to fissions per square foot and compared to the average buried-tray deposit taken from Table B.27. It may be seen that, within the uncertainty of the measurements, the weighted-mean platform values are in good agreement with the ground results. It must be recalled, however, that single winds prevailed at How Island for all shots, and that the observed bias ratios were low (< 2).

The AOC_2 collections at Station K (Table 3.15) are also included in Table 4.5 for comparison. They appear to be consistently slightly lower than the other determinations, with the exception of the much lower value for Shot Navajo. The latter may be due to recovery loss and counting error resulting from the light fallout experienced at the station during this shot. Because only one collector was present in each minor sampling array, bias studies of the kind conducted for the major arrays were not possible. As mentioned earlier, however, an attempt was made to minimize bias in the design of the collector and, insofar as possible, to keep geometries alike. Although it was necessary to reinforce their mounting against blast and thermal damage on the rafts and islands (Figure 2.7), identical collectors were used for all minor arrays.

Shipboard Collections and Sea Water Sampling. The platform collections of the YAG 39 and YAG 40 may be compared with the water-sampling results reported in Reference 20, decay-tank data from the YAG 39, and in some cases with the water-sampling results from the SIO vessel Horizon (Reference 15). Strictly speaking, however, shipboard collections should not be compared with post-fallout ocean surveys, because, in general, the fallout to which the ship is exposed while attempting to maintain geographic position is not that experienced by the element of ocean in which the ship happens to be at cessation.

The analysis of an OCC collection for total fission content is straightforward, although the amount collected may be biased; the ocean surface, on the other hand, presents an ideal collector but difficult analytical problems. For example, background activities from previous shots must be known with time, position, and depth; radionuclide fractionation, with depth, resulting from leaching in sea water should be known; and the decay rates for all kinds of samples and instruments used are required. Fallout material which is fractionated differently from point-to-point in the fallout field before entry into the ocean presents an added complication.

Table 4.6 summarizes the results of the several sampling and analytical methods used. The ocean values from Reference 20 were calculated as the product of the equivalent depth of penetration (Section 3.2.5) at the ship and the surface concentration of activity (Method I). The latter was determined in every case by averaging the dip-count values of appropriate surface samples listed in Table B.32 and converting to equivalent fissions per cubic foot. When penetration depths could not be taken from the plots of equivalent depth given in Figure B.1, however, they had to be estimated by some other means. Thus, the values for both ships during Shot Zuni were assumed to be the same as that for the YAG 39 during Shot Tewa; the value for the YAG 39 during Shot Flathead was estimated by extrapolating the equivalent depth curve, while that for the YAG 40 was taken from the same curve; and the values for the YAG 40 during Shots Navajo and Tewa were estimated from what profile data was available.

The conversion factor for each shot (fissions/(dip counts/min at 200 hours) for a standard counting volume of 2 liters) was obtained in Method I from the response of the dip counter to a known quantity of fissions. Although direct dip counts of OCC aliquots of known fission content became available at a later date (Table B.15), it was necessary at the time to derive these values from aliquots of OCC and water samples measured in a common detector, usually the well counter. The values for the decay tank listed under Method I in Table 4.6 were also obtained from dip counts of tank samples, similarly converted to fissions per cubic foot. Dip-counter response was decay-corrected to 200 hours by means of the normalized curves shown in Figure B.14.

Another estimate of activity in the ocean was made (private communication from R. Caputi, NRDL), using the approach of planimetry of the total areas of a number of probe profiles meas-

ured at late times in the region of YAG 39 operations during Shots Navajo and Tewa (Method II). (The probe profiles were provided, with background contamination subtracted out and converted from microamperes to apparent milliroentgens per hour by F. Jennings, Project 2.62a, SIO. Measurements were made from the SIO vessel Horizon.) The integrated areas were converted to fissions per square foot by applying a factor expressing probe response in fissions per cubic foot. This factor was derived from the ratio at 200 hours of surface probe readings and surface sample dip counts from the same station, after the latter had been expressed in terms of fissions using the direct dip counter-OCC fission content data mentioned above. These results are also listed in Table 4.6.

The set of values for the YAG 39 decay tank labeled Method III in the same table is based on direct radiochemical analyses of tank (and ocean surface) samples for Mo^{99} (Table B.30). The results of Methods I and II were obtained before these data became available and, accordingly, were accomplished without knowledge of the actual abundance distribution of molybdenum with depth in sea water.

Table 4.7 is a summary of the dip-to-fission conversion factors indicated by the results in Table B.30; those used in Methods I and II are included for comparison. It is noteworthy that, for the YAG 39, the ocean surface is always enriched in molybdenum, a result which is in agreement with the particle dissolution measurements described earlier (Figures 3.11 and 3.12); in this experiment Mo^{99} , Np^{239} , and probably I^{131} were shown to begin leaching out preferentially within 10 seconds. The tank value for Shot Zuni, where the aliquot was withdrawn before acidifying or stirring, shows an enrichment factor of ~ 3.5 relative to the OCC; acidification and stirring at Shot Tewa eliminated the effect. The slurry fallout from Shots Flathead and Navajo, however, shows only a slight tendency to behave in this way.

Finally, Table 4.6 also lists the representative platform values obtained earlier, as well as the maximum values read from the platform-collection curves for the cases where deposition occurred under essentially single-wind conditions (Table 4.4). These values are included as a result of postoperation rainfall measurements made at NRDL (Table B.31). (Although the data have not received complete statistical analysis, the ratio of the maximum collection of rainfall by an OCC on the LST 611 platform to the average collection of a ground array of OCC trays is indicated to be 0.969 ± 0.327 for a variety of wind velocities (Reference 75).)

It may be seen by examination of Table 4.6 that the most serious discrepancies between ocean and shipboard collections arise in two cases: the YAG 39 during Shot Zuni, where the ocean/OCC (maximum) ratio of ~ 2 may be attributed entirely to the fission/dip conversions employed—assuming the OCC value is the correct average to use for a depth profile; and the YAG 39 during Shot Navajo, where the ocean/OCC ratio is ~ 10 , but the tank radiochemical value and the Horizon profile value almost agree within their respective limits. While the OCC value appears low in this multiwind situation, the difference between the YAG 39 and Horizon profiles may be the background correction made by SIO.

In the final analysis, the best and most complete data were obtained at the YAG 39 and Horizon stations during Shot Tewa. Here, preshot ocean surface backgrounds were negligibly small; equipment performed satisfactorily for the most part; the two vessels ran probe profiles in sight of each other; and the Horizon obtained depth samples at about the same time. The YAG 39 did not move excessively during fallout, and the water mass of interest was marked and followed by drogue buoys. In addition to the values reported in Table 4.6, the value 1.82×10^{15} fissions/ft² was obtained for the depth-sample profile, using the dip-to-fission factor indicated in Table 4.7. (Because of the variations in the fission conversion factor with the fractionation exhibited from sample to sample, a comparison was made of the integral value of the dip counts (dip counts/min)/2 liters) feet from the depth-sample profile with the OCC YAG 39-C-21 catch expressed in similar units. The ratio ocean integral/OCC-C-21 = 1.08 was obtained.)

It may be seen that all values for this shot and area agree remarkably well, in spite of the fact that Method I measurements extend effectively down to the thermocline, some of the Method II profiles to 500 meters, and the depth sample cast to 168 meters. If the maximum OCC catch is taken as the total fallout, then it must be concluded that essentially no activity was lost to depths greater than those indicated. Although the breakup of friable particles and dissolution

of surface-particle activity might provide an explanation, contrary evidence exists in the rapid initial settling rates observed in some profiles, the solid nature of many particles from which only ~20 percent of the activity is leachable in 48 hours, and the behavior of Zuni fallout in the YAG 39 decay tank. Relative concentrations of 34, 56, and 100 were observed for samples taken from the latter under tranquil, stirred, and stirred-plus-acidified conditions. (Based on this information and the early Shot Tewa profiles of Figure 3.10, the amount lost is estimated at about 50 percent at the YAG 39 locations in Reference 20.) If on the other hand it is assumed that a certain amount of activity was lost to greater depths, then the curious coincidence that this was nearly equal to the deficit of the maximum OCC collection must be accepted.

It is unlikely that any appreciable amount of activity was lost below the stirred layer following Shots Flathead and Navajo. No active solids other than the solids of the slurry particles, which existed almost completely in sizes too small to have settled below the observed depth in the time available, were collected during these shots (Section 3.3.2).

In view of these considerations and the relative reliability of the data (Section 4.2), it is recommended that the maximum platform collections (Table B.12) be utilized as the best estimate of the total amount of activity deposited per unit area. An error of about ± 50 percent should be associated with each value, however, to allow for the uncertainties discussed above. Although strictly speaking, this procedure is applicable only in those cases where single-wind deposition prevailed, it appears from Table 4.6 that comparable accuracy may be achieved for cases of multiwind deposition by retaining the same percent error and doubling the mean platform value.

4.3.3 Gross Product Decay. The results presented in Section 3.4.6 allow computation of several other radiological properties of fission products, among them the gross decay exponent. Some discussion is warranted because of the common practice of applying a $t^{-1.2}$ decay function to any kind of shot, at any time, for any instrument.

This exponent, popularized by Reference 58, is apparently based on a theoretical approximation to the beta-decay rate of fission products made in 1947 (Reference 59), and some experimental gamma energy-emission rates cited in the same reference. Although these early theoretical results are remarkably good when restricted to the fission-product properties and times for which they were intended, they have been superseded (References 41, 60, 61, and 62); and, except for simple planning and estimating, the more-exact results of the latter works should be used.

If fractionation occurs among the fission products, they can no longer be considered a standard entity with a fixed set of time-dependent properties; a fractionated mixture has its own set of properties which may vary over a wide range from that for normal fission products.

Another source of variation is induced activities which, contrary to Section 9.19 of Reference 47, can significantly alter both the basic fission-product-decay curve shape and gross property magnitudes per fission.

The induced products contributed 63 percent of the total dose rate in the Bikini Lagoon area 110 hours after Shot Zuni; and 65 percent of the dose rate from Shot Navajo products at an age of 301 days was due to induced products, mainly Mn^{54} and Ta^{182} . Although many examples could be found where induced activities are of little concern, the a priori assumption that they are of negligible importance is unsound.

Because the gross disintegration rate per fission of fission products may vary from shot to shot for the reason mentioned above, it is apparent that gamma-ray properties will also vary, and the measurement of any of these with an instrument whose response varies with photon energy further complicates matters.

Although inspection of any of the decay curves presented may show an approximate $t^{-1.2}$ average decay rate when the time period is judiciously chosen, it is evident that the slope is continuously changing, and more important, that the absolute values of the functions, e. g., photons per second per fission or roentgens per hour per fissions per square foot, vary considerably with sample composition.

As an example of the errors which may be introduced by indiscriminate use of the $t^{-1.2}$

tion or by assuming that all effects decay alike, consider the lagoon-area ionization curve for Shot Tewa (Figure 3.39) which indicates that the 1-hour dose rate may be obtained by multiplying the 24-hour value by 61.3. A $t^{-1.2}$ correction yields instead a factor of 45.4 (-26 percent error), and if the doghouse-decay curve is assumed proportional to the ionization-decay curve, a factor of 28.3 (-54 percent) results. To correct any effect to another time it is important, therefore, to use a theoretical or observed decay rate for that particular effect.

4.3.4 Fraction of Device by Chemistry and Radiochemistry. The size of any sample may be expressed as some fraction of device. In principle, any device component whose initial weight is known may serve as a fraction indicator; and in the absence of fractionation and analytical errors, all indicators would yield the same fraction for a given sample. In practice, however, only one or two of the largest inert components will yield enough material in the usual fallout sample to allow reliable measurements. These measurements also require accurate knowledge of the amount and variability of background material present, and fractionation must not be introduced in the recovery of the sample from its collector.

The net amounts of several elements collected have been given in Section 3.4.4, with an assessment of backgrounds and components of coral and sea water. The residuals of other elements are considered to be due to the device, and may therefore be converted to fraction of device (using Table B.17) and compared directly with results obtained from Mo^{99} . This has been done for iron and uranium, with the results shown in Table 4.8. Fractions by copper proved inexplicably high (factors of 100 to 1,000 or more), as did a few unreported analyses for lead; these results have been omitted. The iron and uranium values for the largest samples are seen to compare fairly well with Mo^{99} , while the smaller samples tend to yield erratic and unreliable results.

4.3.5 Total Dose by Dosimeter and Time-Intensity Recorder. Standard film-pack dosimeters, prepared and distributed in the field by the U. S. Army Signal Engineering Laboratories, Project 2.1, were placed at each major and minor sampling array for all shots. Following sample recovery, the film packs were returned to this project for processing and interpretation as described in Reference 76; the results appear in Table 4.9.

The geometries to which the dosimeters were exposed were always complicated and, in a few instances, varied between shots. In the case of the ship arrays, they were located on top of the TIR dome in the standard platform. On How-F and YFNB 29, Shot Zuni, they were taped to an OCC support ~2 feet above the deck of the platform before the recovery procedure became established. All other major array film packs were taped to the RA mast or ladder stanchion ~2.5 feet above the rim of the platform to facilitate their recovery under high-dose-rate conditions. Minor array dosimeters were located on the exterior surface of the shielding cone ~4.5 feet above the base in the case of the rafts and islands, and ~5 feet above the deck on the masts of all skiffs except Skiffs BB and DD where they were located ~10 feet above the deck on the mast for Shot Zuni; subsequently the masts were shortened for operational reasons.

Where possible, the dose recorded by the film pack is compared with the integrated TIR readings (Table B.1) for the period between the time of fallout arrival at the station and the time when the film pack was recovered; the results are shown in Table 4.9. It has already been indicated (Section 3.4.6) that the TIR records only a portion of the total dose in a given radiation field because of its construction features and response characteristics. This is borne out by Table 4.10, which summarizes the percentages of the film dose represented in each case by the TIR dose.

It is interesting to observe that for the ships, where the geometry was essentially constant, this percentage remains much the same for all shots except Navajo, where it is consistently low. The same appears to be generally true for the barge platforms, although the results are much more difficult to evaluate. A possible explanation may lie in the energy-response curves of the TIR and film dosimeter, because Navajo fallout at early times contained Mn^{56} and Na^{24} —both of which emit hard gamma rays—while these were of little importance or absent in the other shots.

4.3.6 Radiochemistry-Spectrometry Comparison. Calibrated spectrometer measurements on samples of known fission content allow expected counting rates to be computed for the samples in any gamma counter for which the response is simply related to the gross photon frequency and energy. Accordingly, the counting rate of the doghouse counter was computed for the standard-cloud samples by application of the calibration curve (Reference 43) to the spectral lines and frequencies reported in Reference 57 and reproduced in Table B.20. These results are compared with observations in Table 4.11, as well as with those obtained previously using radiochemical-input information with the same calibration curve. Cloud samples were chosen, because the same physical sample was counted both in the spectrometer and doghouse counter, thereby avoiding uncertainties in composition or fission content introduced by aliquoting or other handling processes.

Several of the spectrometers used by the project were uncalibrated, that is, the relation between the absolute number of source photons emitted per unit time at energy E and the resulting pulse-height spectrum was unknown. A comparison method of analysis was applied in these cases, requiring the area of a semi-isolated reference photopeak, whose nuclide source was known, toward the high-energy end of the spectrum. From this the number of photons per seconds per fissions per area can be computed. The area of the photopeak ascribed to the induced product, when roughly corrected by assuming efficiency to be inversely proportional to energy, yields photons per seconds per fissions. The latter quantity leads serially, via the decay scheme, to disintegration rate per fission at the time of measurement, then to atoms at zero time per fission, which is the desired product/fission ratio. The γ line at 0.76 Mev provides a satisfactory reference from ~ 30 days to 2 years, but the gross spectra are usually not simple enough to permit use of this procedure until an age of $\sim \frac{1}{2}$ year has been reached.

A few tracings of the recorded spectra appear in Figure 4.15, showing the peaks ascribed to the nuclides of Table 3.20. Wherever possible, spectra at different ages were examined to insure proper half-life behavior, as in the Mn^{56} illustration. The Zuni cloud-sample spectrum at 226 days also showed the 1.7-Mev line of Sb^{124} , though not reproduced in the figure. This line was barely detectable in the How Island spectrum, shown for comparison, and the 0.60-Mev line of Sb^{124} could not be detected at all.

Average energies, photon-decay rates and other gamma-ray properties have been computed from the reduced spectral data in Table B.20 and appear in Table B.21.

4.3.7 Air Sampling. As mentioned earlier, a prototype instrument known as the high volume filter (HVF) was proof-tested during the operation on the ship-array platforms. This instrument, whose intended function was incremental aerosol sampling, is described in Section 2.2. All units were oriented fore and aft in the bow region of the platform between the two IC's shown in Figure A.1. The sampling heads opened vertically upward, with the plane of the filter horizontal, and the airflow rate was $10 \text{ ft}^3/\text{min}$ over a filter area of 0.0670 ft^2 , producing a face velocity of 1.7 mph.

The instruments were manually operated according to a fixed routine from the secondary control room of the ship; the first filter was opened when fallout was detected and left open until the TIR reading on the deck reached $\sim 1 \text{ r/hr}$; the second through the seventh filters were exposed for $\frac{1}{2}$ -hour intervals, and the last filter was kept open until it was evident that the fallout rate had reached a very low level. This plan was intended to provide a sequence of relative air concentration measurements during the fallout period, although when 1 r/hr was not reached only one filter was exposed. Theoretically, removal of the dimethylterephthalate filter material by sublimation will allow recovery of an unaltered, concentrated sample; in practice however, the sublimation process is so slow that it was not attempted for this operation.

After the sampling heads had been returned to NRDL, the filter material containing the activity was removed as completely as possible and measured in the $4-\pi$ ionization chamber; these data are summarized in Table B.36. It may be seen that the indicated arrival characteristics generally correspond with those shown in Figures 3.1 to 3.4.

A comparative study was also made for some shots of the total number of fissions per square foot collected by HVF's, IC's, and OCC's located on the same platform. Ionization-chamber

activities were converted to fissions by means of aliquots from OCC YAG 39-C-21, Shots Flat-head and Navajo, and YAG 40-B-6, Shot Zuni, which had been analyzed for Mo⁹⁹. It may be seen in Table 4.12 that, with one exception, the HVF collected about the same or less activity than the other two instruments. In view of the horizontal aspect of the filter and the low airflow rate used, there is little question that the majority of the activity the HVF collected was due to fallout. The results obtained should not, therefore, be interpreted as an independent aerosol hazard.

TABLE 4.1 ACTIVITY PER UNIT AREA FOR
SKIFF STATIONS, SHOT CHEROKEE

No fallout was collected on the skiffs omitted from
the table.

Station	Dip counts/min at H + hr	Approximate fissions/ft ²
AA	3,094	196.6
BB	3,094	196.6
CC	4,459	150.3
DD	9,885	214.2
GG	5,720	196.2
HH	858	196.1
MM	8,783	214.0
VV	452	432.0

TABLE 4.2 EVALUATION OF MEASUREMENT AND DATA RELIABILITY

I. Field Measurements and Deposition Properties

Class	Measurement	Instrument	Comments
A	Station location, ships	—	± 500 to 1,000 yards.
A	Station location, skiffs	—	± 1,000 yards.
A-C	Time of arrival	TIR	Arbitrary selection of significant increase above background.
A-C	Time of arrival	IC	Uncertainty in first tray significantly above background; arrival uncertain within time interval tray exposed.
A-D	Time of arrival	TOAD	Uncertain for initially low rates of field increase; malfunctions on skiffs; clock-reading difficulties.
A	Time of peak ionization rate	TIR	—
A-C	Time of peak fallout arrival rate	IC	Uncertain for protracted fallout duration and sharp deposition rate peaks.
D	Time of cessation	TIR	Depends on knowledge of decay rate of residual material.
B-D	Time of cessation	IC	Rate plot for protracted fallout and fallout with sharp deposition-rate peaks may continue to end of exposure period; cumulative activity slope approaches 1.
C	Ionization rate, in situ	TIR	Poor directional-energy response (Appendix A.2); variations in calibration; poor inter-chamber agreement.
C	Apparent ionization rate, in ocean	SIO-P	Calibration variable, mechanical difficulties.
C	Apparent ionization rate, in tank	SIO-D	Calibration variable, electrical difficulties.
N	Ionization rate, above sea surface	NYO-M	High self-contamination observed.
B	Ionization rate, in situ	T1B, Cutie Pie	Calibration for point source in calibration direction; readings ~ 20 percent low above extended source.
C	Total dose	TIR	See above: Ionization rate, TIR.
N	Total dose	ESL film pack	Assumed ± 20 percent.
D	Weight of fallout/area	OCC	Bias uncertainty (Section 4.3.2); variability of background collections; see below: Elemental composition, fallout.
D	Fraction of device/area (Fe, U)	OCC	Bias uncertainty (Section 4.3.2); uncertainty of indicator abundance in device surroundings; see below: Elemental composition, fallout.
D	Original coral-sea-water constituents	OCC	Variations in atoll, reef, and lagoon bottom composition; see below: Elemental composition, fallout.
C	Fissions and fraction of device/area (Mo ⁹⁹)	OCC	Bias uncertainty (Section 4.3.2); device fission yield uncertainty.
D	Fissions/area	SIO-P, dip	Uncertainties in dip to fission conversion factor, ocean backgrounds, fractionation of radionuclides, motion of water; see above: Apparent ionization rate, in ocean.

TABLE 4.2 CONTINUED

II. Laboratory Activity Measurements.

Class	Measurement	Sample	Comments
A	Gamma activity, doghouse	OCC, AOC ₁ , AOC ₁ -B	Precision better than ±5 percent, except for end portion of decay curves.
A-C	Gamma activity, dip	AOC ₂ aliquots, tank, sea water	Aliquoting uncertainty with occasional presence of solids in high specific-activity sample.
A	Gamma activity, end-window	IC trays	Precision better than ±5 percent.
A	Gamma activity, well	Individual particles, aliquots of most samples	Precision for single particles ±3 percent (Reference 26).
B	Gamma activity, 4-π ion chamber	Aliquots of most samples	Some skill required in operation; precision ±5 to 20 percent at twice background (Reference 26).
A	Mo ⁹⁹ assay, radiochemical	OCC, cloud	Accuracy ±10 percent (Reference 34).
B	Radiochemical R-values, product/fission ratios	OCC, cloud	Accuracy of nuclide determination ±20 to 25 percent (Reference 34).
D	Spectrometry R-values, product/fission ratios	OCC, cloud, IC	Factor of 2 or 3; misidentification possible.
A	Relative decay rates, all instruments	All required	With few exceptions, necessary decay corrections made from observed decay rates of appropriate samples in counters desired.

III. Laboratory Physical and Chemical Measurements

Class	Measurement	Sample	Comments
A	Chloride content, slurry drops	IC reagent film	Accuracy ±5 percent (Reference 31).
B	Water volume, slurry drops	IC reagent film	Accuracy ±25 percent (Reference 31).
D	Identification, compounds and elements of slurry solids	IC reagent films, OCC	Possible misidentification; small samples, small number of samples.
A	Solid particle weights	IC trays, OCC, unscheduled	Accuracy and precision ±5 μg, leading to ±1 percent or better on most particles (Reference 26).
A	Solid particle densities	IC trays, OCC, unscheduled	Precision better than ±5 percent.
C	Elemental composition, fallout	OCC	Large deviations in composition from duplicate trays; recovery loss, and possible fractionation, ~40 mg; honeycomb interference.
D	Identification, compounds and elements of slurry solids	IC reagent film, OCC	Possible misidentification; small samples; small number of samples.
B-C	Particle size-frequency distributions, concentrations and relative weights versus time	IC trays	Difficulties in recognition of discrete particles, treatment of flaky or aggregated particles; uncertain application of defined diameter to terminal-velocity equations; tray backgrounds and photographic resolution in smaller size ranges.

IV. Radiation Characteristics Data

Class	Item	Comments
A-C	Gamma-ray decay schemes	Amount of decay scheme data available dependent on particular nuclide.
A-B	Fission-product-disintegration rates	About ±20 percent for time period considered (Reference 41).
N	Computed $\frac{r}{hr}$ at 3 ft above infinite plane $\frac{\text{photon/tims/area}}{\text{versus photon energy}}$	Error assumed small compared to errors in fallout concentration, radionuclide composition, and decay scheme data.
B	Absolute calibration, beta counter	Personal communication from J. Mackin, NRD. L.
B	Absolute calibration, doghouse counter	Uncertainty in disintegration rate of calibrating nuclides; dependence on gamma-ray decay schemes.

TABLE 4.3 COMPARISON OF PREDICTED AND OBSERVED TIMES OF ARRIVAL AND MAXIMUM PARTICLE-SIZE VARIATION WITH TIME

Shot *	Station	Time of Arrival		Maximum Particle Size (microns) at					
		Predicted	Observed †	Time of Arrival		Time of Peak Activity †		Time of Cessation †	
				Predicted	Observed ‡	Predicted	Observed ‡	Predicted	Observed ‡
TSD, hr									
Flathead	YFNB 13	§	0.35	—	—	—	—	—	—
	How I	§	§	—	—	—	—	—	—
	YAG 39	3	4.5	200	—	¶	—	¶	—
	YAG 40	9	8.0	125	—	70	120	<70	—
	LST 611	6	6.6	120	112	¶	—	¶	—
Navajo	YFNB 13	<0.5	0.20	>1,000	—	>1,000	—	—	—
	How I	1.5	0.75	500	—	500	—	¶	—
	YAG 39	2	2.3	500	—	180	—	~100	—
	YAG 40	4	6.0	200	—	130	96	~75	84
	LST 611	3	3.0	300	—	180	166	—	—
Zuni	YFNB 13	<1	0.33	500	1,400	500	695	500	545
	How I	<1.5	0.38	>500	—	>500	365	>500	—
	YAG 40	~6	3.4	§	325	150	300	125	245
	YAG 39	9	12	100	—	¶	—	¶	—
	LST 611	§	§	—	—	—	—	—	—
Tewa	YFNB 13	<0.5	0.25	2,000	285	350	—	¶	—
	YFNB 29	<1	0.23	800	1,100	500	1,000	¶	—
	How I	1	1.6	1,000	205	250	285	¶	—
	YAG 39	2	2.0	500	—	180	395	¶	—
	YAG 40	3.5	4.4	200	—	100	285	90	255
	LST 611	7	7.0	150	285	80	205	—	—

* The following cloud dimensions were used in the calculations:	Shot Flathead	Shot Navajo	Shot Zuni	Shot Tewa
Top, × 1,000 ft	65	85	80	90
Base, × 1,000 ft	35	50	50	50
Diameter, naut mi	6	40	40	60

† Table 3.1.

‡ Section 3.2.4 and Tables B.3 and B.5.

§ No fallout, or no fallout at reference time.

¶ Fallout completed by reference time.

TABLE 4.4 RELATIVE BIAS OF STANDARD-PLATFORM COLLECTIONS

Platform	Shot	Collection Curve		Bias Ratio	Bias Fraction	Bias Direction		Weighted Mean Platform Value doghouse counts/min at 100 hrs
		Maximum	Minimum			Observed	Computed	
		doghouse counts/min at 100 hrs				deg	deg	
How F	Zuni	2.91×10^6	1.59×10^6	1.8	1.0	75	77	$2.24 \pm 0.51 \times 10^6$
	Flathead	*	*	*	*	*	*	*
	Navajo	1.98×10^4	1.45×10^4	1.4	1.0	75	79	$1.72 \pm 0.20 \times 10^4$
	Tewa	3.31×10^5	2.02×10^5	1.6	1.0	69	92	$2.65 \pm 0.50 \times 10^5$
YAG 40-B	Zuni	7.48×10^6	3.76×10^6	2.0	0.68	152	126	$5.61 \pm 1.45 \times 10^6$
	Flathead	4.57×10^5	0.229×10^5	20.	0.98	0	342	$2.25 \pm 1.85 \times 10^5$
	Navajo	9.04×10^4	5.14×10^4	1.8	0.16	356	37	$7.07 \pm 1.47 \times 10^4$
	Tewa	15.8×10^6	1.30×10^6	12.	0.85	358	350	$8.39 \pm 5.72 \times 10^6$
YAG 39-C	Zuni	13.8×10^4	1.45×10^4	9.5	0.97	345	353	$7.54 \pm 4.68 \times 10^4$
	Flathead	11.5×10^4	2.12×10^4	5.4	0.41	327	12	$6.79 \pm 3.61 \times 10^4$
	Navajo	2.33×10^5	1.12×10^5	2.1	0.44	352	343	$1.71 \pm 0.46 \times 10^5$
	Tewa	2.82×10^7	0.282×10^7	10.	0.97	358	357	$1.50 \pm 1.03 \times 10^7$
LST 611-D	Zuni	*	*	*	*	*	*	*
	Flathead	†	†	†	†	†	†	$7.42 \pm 6.12 \times 10^4$ †
	Navajo	§	§	§	§	§	§	$1.47 \pm 0.47 \times 10^4$ †
	Tewa	18.8×10^5	8.34×10^5	2.3	¶	332	¶	$1.35 \pm 0.57 \times 10^6$
YFNB 13-E	Zuni	5.12×10^6	2.54×10^6	2.0	¶	15	¶	$3.84 \pm 1.02 \times 10^6$
	Flathead	7.36×10^6	4.42×10^6	1.7	¶	13	¶	$5.86 \pm 1.08 \times 10^6$
	Navajo	8.43×10^6	6.39×10^6	1.3	¶	354	¶	$7.41 \pm 0.79 \times 10^6$
	Tewa	6.90×10^6	1.92×10^6	3.6	¶	349	¶	$4.28 \pm 1.99 \times 10^6$
YFNB 29-G	Zuni	5.81×10^6	3.49×10^6	1.7	¶	342	¶	$4.65 \pm 0.90 \times 10^6$
	Flathead	3.12×10^5	2.01×10^5	1.6	¶	350	¶	$2.56 \pm 0.40 \times 10^5$
	Navajo	1.21×10^4	0.85×10^4	1.4	¶	17	¶	$1.03 \pm 0.13 \times 10^4$
	Tewa	3.90×10^7	1.56×10^7	2.5	¶	10	¶	$2.73 \pm 0.93 \times 10^7$
YFNB 29-H	Zuni	9.10×10^6	4.98×10^6	1.8	¶	346	¶	$6.97 \pm 1.60 \times 10^6$
	Flathead	§	§	§	¶	§	¶	$2.91 \pm 0.84 \times 10^5$ †
	Navajo	§	§	§	¶	§	¶	$1.45 \pm 0.24 \times 10^4$ †
	Tewa	6.73×10^7	3.32×10^7	2.0	¶	0	¶	$4.99 \pm 1.40 \times 10^7$

* Very light or no fallout occurred. † Instrument malfunction; analysis not attempted. ‡ Average of six total collectors in platform. § Collection curve could not be constructed. ¶ Vectorial analysis not attempted.

TABLE 4.5 COMPARISON OF HOW ISLAND COLLECTIONS

Shot	Standard Platform	Buried Trays	AOC ₂	Platform/Buried Trays
	weighted mean fissions/ft ²	weighted mean fissions/ft ²	fissions/ft ²	
Zuni	2.07 ± 0.47 × 10 ¹⁴	2.08 ± 0.22 × 10 ¹⁴	1.87 × 10 ¹⁴	0.995 ± 0.249
Flathead	6.14 ± 2.72 × 10 ¹⁰ *	†	2.16 × 10 ¹⁰	—
Navajo	1.49 ± 0.17 × 10 ¹³	1.24 ± 0.51 × 10 ¹³	2.67 × 10 ¹¹	1.202 ± 0.512
Tewa	2.61 ± 0.49 × 10 ¹³	2.30 ± 0.35 × 10 ¹³	1.53 × 10 ¹³	1.135 ± 0.274

* Mean of six total collectors.

† No activity resolvable from Zuni background.

TABLE 4.6 SURFACE DENSITY OF ACTIVITY DEPOSITED ON THE OCEAN

Shot	Station	Ocean, Probe Analysis		Decay Tank, YAG 39		OCC, Ship Platform	
		Method I	Method II	Method I	Method III	Weighted Mean	Maximum Extrapolation *
		fissions/ft ²		fissions/ft ²		fissions/ft ²	
Zuni	YAG 39	9 × 10 ¹² †	—	8.3 × 10 ¹²	—	2.74 ± 1.70 × 10 ¹²	5.02 × 10 ¹²
	YAG 40	1 × 10 ¹⁴ †	—	—	—	3.67 ± 0.95 × 10 ¹⁴	—
Flathead	YAG 39	1.1 × 10 ¹³	—	7.0 × 10 ¹²	6.96 ± 2.89 × 10 ¹²	4.36 ± 2.32 × 10 ¹²	—
	YAG 40	3 × 10 ¹³	—	—	—	1.55 ± 1.27 × 10 ¹³	3.15 × 10 ¹³
Navajo	YAG 39	1.6 × 10 ¹⁴	—	5.2 × 10 ¹³	3.40 ± 0.72 × 10 ¹³	1.54 ± 0.41 × 10 ¹³	—
	Horizon	—	5.98 ± 1.02 × 10 ¹³ §	—	—	—	—
Tewa	YAG 40	4.4 × 10 ¹³	—	—	—	6.05 ± 1.26 × 10 ¹²	—
	YAG 39	2.2 × 10 ¹⁵ †	—	3.6 × 10 ¹⁵	2.75 ± 0.88 × 10 ¹⁵	1.11 ± 0.76 × 10 ¹⁵	2.08 × 10 ¹⁵
	Horizon	—	3.00 ± 0.77 × 10 ¹⁵ ¶	—	—	—	—
	YAG 40	1.1 × 10 ¹⁵ †	—	—	—	4.70 ± 3.20 × 10 ¹⁴	8.85 × 10 ¹⁴

* For cases of essentially single-wind deposition.

† Not corrected for material possibly lost by settling below stirred layer.

‡ Considerable motion of ship during fallout period.

§ Average of profiles taken at Horizon stations 4, 4A, 5, 7, and 8 from 18.6 to 34.3 hours (Table B.33).

¶ Average of profiles taken at Horizon stations 2-5, 5A, 6, and 12 from 21.3 to 81.2 hours (Table B.33).

TABLE 4.7 DIP-COUNTER CONVERSION FACTORS

Unless otherwise noted, all factors given are based on a direct dip count and radiochemical analysis for Mo⁹⁹. Sample designators and bottle numbers are given in parentheses.

Station	Source	Shot Zuni × 10 ⁶	Shot Flathead × 10 ⁶	Shot Navajo × 10 ⁶	Shot Tewa × 10 ⁶
A. Fissions/(dip counts/min at 100 hrs)					
YAG 39	OCC	0.530 (C-21) *	0.945 (C-21)	1.285 (C-21)	1.02 (C-21)
	Decay tank	1.853 (T-1B, 8,035) †	0.774 (T-1B, 8,549)	0.960 (T-3B, 8,585)	0.645 (T-1B, 8,350)
	Ocean surface	4.537 (S-1B, 8,030)	1.137 (S-1B, 8,544)	1.430 (S-3B, 8,581)	1.525 (S-1B, 8,326)
YAG 40	OCC	1.02 (B-6)	1.006 (B-4) *	1.248 (B-4) *	0.817 (B-4) *
	Ocean surface	0.906 (S-1B, 8,254)	—	—	1.709 (S-2B, 8,289)
McGinty	Ocean surface	—	—	0.726 (MS-5A, 8,052)	—
	Ocean surface	—	—	1.09 (MS-5B, 8,053)	—
B. Fissions/(dip counts/min at 200 hrs) ‡					
YAG 39	OCC	1.37	2.16	3.36	2.45
	Decay tank	4.80	1.77	2.51	1.55
	Ocean surface	11.75	2.61	3.73	3.66
	Method I	2.33	2.46	4.03	2.46
	Method II			3.23 ± 0.39	2.90 ± 0.51

* No OCC aliquot counted in dip counter; computed from Table B.13 and doghouse/dip average ratio in Table B.15.

† Tank unacidified and unstirred when sample taken.

‡ Values in A corrected to 200 hours by average photon-decay factors 2.59, 2.29, 2.61, and 2.40 for Shots Zuni, Flathead, Navajo, and Tewa, respectively. These decay-curve shapes are practically identical to those shown in Figure B.14 over this time period.

TABLE 4.9 GAMMA DOSAGE BY ESL FILM DOSIMETER AND INTEGRATED TIR MEASUREMENTS

Station	Shot Zuni			Shot Flathead			Shot Navajo			Shot Tewa		
	Film Dose	TIR Dose	Exposure Time	Film Dose	TIR Dose	Exposure Time	Film Dose	TIR Dose	Exposure Time	Film Dose	TIR Dose	Exposure Time
	r	r	to H+hr	r	r	to H+hr	r	r	to H+hr	r	r	to H+hr
YAG 40-B	30	19.8	28.2	2.5	1.7	33.6	1.77	0.8	32.8	41.6	31.0	32.6
YAG 39-C	0.2	0.2	34.6	0.05	0.5	28.1	10	4.6	50.3	68	67.0	51.3
LST 611-D	<0.05	0.0	62.0	1.7	1.3	51.6	0.81	0.3	26.6	3.62	3.4	31.7
YFNB 13-E	44	17.8*	26.7	400	74.6*	26.7	68.5	13.7	58.3	20.3	8.7	7.8
YFNB 29-G	20	23.6	6.9	7.5	3.7	5.7	1.64	0.2	6.5	310	158.0*	51.1
YFNB 29-H	43	41.7	27.7	12	3.9	25.9	1.65	0.7	5.5	320	284.0*	75.6
How F	19	6.7	11.1	0.22	0.0	6.3	1.82	†	6.7	4.5	0.8	8.3
How K	51	—	30.2	3.1	—	6.3	3.37	—	10.7	6.7	—	8.4
George L	260	—	32.7	230	—	31.7	150	—	32.5	†	—	†
Charlie M	—	—	—	—	—	—	107	—	32.7	†	—	†
William M	110	—	31.6	5.2	—	30.9	—	—	—	—	—	—
Raft 1	25	—	30.8	1.5	—	29.4	1.32	—	27.3	3.35	—	31.7
Raft 2	40	—	29.8	24	—	28.6	4.62	—	28.1	45.5	—	32.3
Raft 3	34	—	28.6	19	—	27.8	16.1	—	28.8	204	—	33
Skiff AA	17	—	52.1	25	—	24.2	13.2	—	59.9	45.5	—	63.25
Skiff BB	33	—	56.9	59	—	28.3	†	—	†	141	—	37.9
Skiff CC	20	—	72.9	9.4	—	30.6	5.2	—	53.2	42.5	—	36.6
Skiff DD	17	—	74.6	†	—	†	2.56	—	50.3	1.28	—	33.4
Skiff EE	2.3	—	171.9	0.6	—	48.4	1.45	—	48.8	9.87	—	31.7
Skiff FF	†	—	†	1.1	—	55.1	0.56	—	29.3	0.3	—	26.5
Skiff GG	10	—	59.3	†	—	†	—	—	—	295	—	60.1
Skiff HH	16	—	60.8	20	—	32.7	29.5	—	52.3	61	—	39.8
Skiff KK	6.8	—	75.7	2.0	—	51.4	6.3	—	33.0	0.62	—	34.7
Skiff LL	†	—	†	1.0	—	53.4	2.05	—	31.0	1.40	—	29.8
Skiff MM	1.8	—	50.1	†	—	†	†	—	†	410	—	61.5
Skiff PP	—	—	—	16	—	34.8	77	—	35.4	60	—	58.3
Skiff RR	2.4	—	77.1	2.0	—	60.8	11.7	—	33.8	0.6	—	41.9
Skiff SS	1.1	—	155.3	3.6	—	58.0	—	—	—	—	—	—
Skiff TT	1.2	—	168.7	1.2	—	56.4	1.09	—	27.8	0.3	—	28.0
Skiff UU	†	—	†	0.45	—	59.3	—	—	—	—	—	—
Skiff VV	†	—	†	—	—	—	—	—	—	—	—	—
Skiff WW	—	—	—	—	—	—	—	—	—	154	—	56.7
Skiff XX	—	—	—	—	—	—	—	—	—	2.05	—	54.6
Skiff YY	—	—	—	—	—	—	—	—	—	1.41	—	52.6

* Estimated value, TIR saturated.

† Instrument malfunctioned or lost.

‡ Not instrumented.

131

Page 130 Deleted

TABLE 4.10 PERCENT OF FILM DOSIMETER READING
RECORDED BY TIR

Station	Shot Zuni pct	Shot Flathead pct	Shot Navajo pct	Shot Tewa pct
YAG 40-B	66	68	45	75
YAG 39-C	100	~100	46	97
LST 811-D	*	76	37	94
YFNB 13-E	41 †	19 †	20	43
YFNB 29-G	~100 ‡	49	12	51 †
YFNB 29-H	97	32	42	89 †
How F	35 ‡	*	‡	18

* No fallout occurred.

† TIR saturated.

‡ Dosimeter location varied from other shots.

§ Instrument malfunctioned.

TABLE 4.11 COMPARISON OF THEORETICAL DOGHOUSE ACTIVITY OF STANDARD-
CLOUD SAMPLES BY GAMMA SPECTROMETRY AND RADIOCHEMISTRY

Time of Spectral Run H+hr	Observed Dog- house Activity counts/min	Computed Activity and Errors			
		Spectrometer counts/min	Error pct	Radiochemical counts/min	Error pct
Shot Zuni Standard Cloud, 9.84×10^{12} fissions					
53	142,500	95,300	-33.1	163,541	+14.8
117	70,000	47,450	-32.2	74,981	+7.11
242	26,700	20,640	-22.7	29,107	+9.01
454	9,500	7,518	-20.9	10,745	+13.1
790	3,700	3,790	+2.43	4,546	+22.9
1,295	1,550	1,973	+27.3	1,984	+28.0
Shot Flathead Standard Cloud, 2.79×10^{13} fissions					
96.5	171,000	142,090	-16.9	154,008	-9.93
195	72,000	51,490	-28.5	66,960	-7.00
262	45,000	29,850	-33.7	43,022	-4.39
334	30,500	22,760	-25.4	29,128	-4.49
435	19,300	14,920	-22.7	19,084	-1.11
718	8,200	6,778	-17.3	7,985	-2.62
1,031	4,400	3,341	-22.5	4,152	-5.63
1,558	2,130	2,243	+5.31	2,076	-2.53
Shot Navajo Standard Cloud, 3.46×10^{12} fissions					
51.5	34,000	27,470	-19.2	31,350	-7.79
69	25,500	20,724	-18.7	22,630	-11.3
141	11,000	9,432	-14.2	9,757	-11.3
191	7,000	7,411	+5.87	6,290	-10.1
315	3,050	2,834	-7.08	2,927	-4.03
645	980	958	-2.24	1,038	+5.92
Shot Tewa Standard Cloud, 4.71×10^{13} fissions					
71.5	442,000	244,930	-44.6	429,600	-2.81
93.5	337,000	194,170	-42.4	325,000	-3.56
117	262,000	157,890	-39.7	255,800	-2.37
165	169,000	134,910	-20.2	161,000	-4.73
240	97,000	74,780	-22.9	91,000	-6.19
334	54,000	38,770	-28.2	52,280	-3.19
429	34,500	25,200	-27.0	33,200	-3.77
579	20,200	14,770	-26.9	19,640	-2.77
766	12,400	10,860	-12.4	12,150	-2.02
1,289	5,200	5,660	+8.85	4,974	-4.35
1,511	3,850	4,550	+18.2	3,759	-2.36

TABLE 4.12 COMPARISON OF ACTIVITIES PER UNIT AREA COLLECTED BY THE HIGH VOLUME FILTER AND OTHER SAMPLING INSTRUMENTS

Shot	Designation and Exposure Period, H+hr			Fissions/ft ² (Mo ⁹⁹)			
	HVF	IC	OCC and AOC ₁	HVF (area = 0.06696 ft ²)	IC (area = 0.05584 ft ²)	OCC and AOC ₁ (area = 2.60 ft ²)	
Zuni	YAG 40-B-9	3.4 to 4.8		10.14 × 10 ¹³			
	YAG 40-B-10	5.3		23.48			
	YAG 40-B-11	5.8		23.73			
	YAG 40-B-12	6.3		21.79			
	YAG 40-B-13	6.8		6.42			
	YAG 40-B-14	7.3		6.93			
	YAG 40-B-15	7.8		0.39			
	YAG 40-B-8	16.4		3.97			
	-HVF to	16.4	YAG 40-B-7 to 15.6	To 16.3 and 28.2 *	9.68 × 10 ¹⁴	6.06 × 10 ¹⁴	3.71 ± 0.88 × 10 ¹⁴
Flathead	YAG 40-B-8	to 26.4	YAG 40-B-7 to 19.9	To 26.4	2.03 × 10 ¹²	3.87 × 10 ¹²	16.3 ± 13.4 × 10 ¹²
	YAG 39-C-25	to 28.1	YAG 39-C-20 to 18.2	To 23.8	1.57 × 10 ¹² †	4.85 × 10 ¹²	4.37 ± 2.37 × 10 ¹²
Navajo	YAG 40-B-8	to 19.1	YAG 40-B-7 to 15.5	To 8.7 and 19.7 *	3.72 × 10 ¹²	3.70 × 10 ¹²	6.08 ± 1.26 × 10 ¹²
	YAG 39-C-25	to cessation	YAG 39-C-20 to 16.1	To 15.9 and 24.1 *	5.50 × 10 ¹²	11.9 × 10 ¹²	14.6 ± 3.5 × 10 ¹²

* Short-exposure trays as active as long.

† DMT spilled on recovery.

TABLE 4.13 NORMALIZED IONIZATION RATE (SC), CONTAMINATION INDEX, AND YIELD RATIO

A number in parentheses indicates the number of zeros between the decimal point and first significant figure.

Shot	Age	r/hr
		fissions/ft ²
Hypothetical, 100 pct fission, unfractionated fission products, no induced activities	1.12 hrs	(12)6254
	1.45 days	(14)6734
	9.82 days	(15)6748
	30.9 days	(15)1816
	97.3 days	(16)3713
	301 days	(17)5097
Zuni, lagoon-area composition	1.12 hrs	(12)3356
	1.45 days	(14)4134
	9.82 days	(15)3197
	30.9 days	(16)9165
	97.3 days	(16)4097
	301 days	(17)7607
Zuni, cloud composition	1.12 hrs	(12)7093
	1.45 days	(13)1407
	9.82 days	(14)1766
	30.9 days	(15)4430
	97.3 days	(16)8755
	301 days	(16)1121
Flathead, average composition	1.12 hrs	(12)5591
	1.45 days	(14)6994
	9.82 days	(15)7924
	30.9 days	(15)1893
	97.3 days	(16)3832
	301 days	(17)5230
Navajo, average composition	1.12 hrs	(12)6864
	1.45 days	(14)9481
	9.82 days	(15)7816
	30.9 days	(15)2160
	97.3 days	(16)5933
	301 days	(16)1477
Tewa, lagoon-area composition	1.12 hrs	(12)3321
	1.45 days	(14)3564
	9.82 days	(15)3456
	30.9 days	(16)9158
	97.3 days	(16)2843
	301 days	(17)4208
Tewa, cloud and outer fallout composition	1.12 hrs	(12)6446
	1.45 days	(14)8913
	9.82 days	(15)8670
	30.9 days	(15)1971
	97.3 days	(16)4019
	301 days	(17)6009

* Ratio of (r/hr)/(Mt(total)/ft²) at t for device to (r/hr)/(Mt(total)/ft²) at t for hypothetical device.

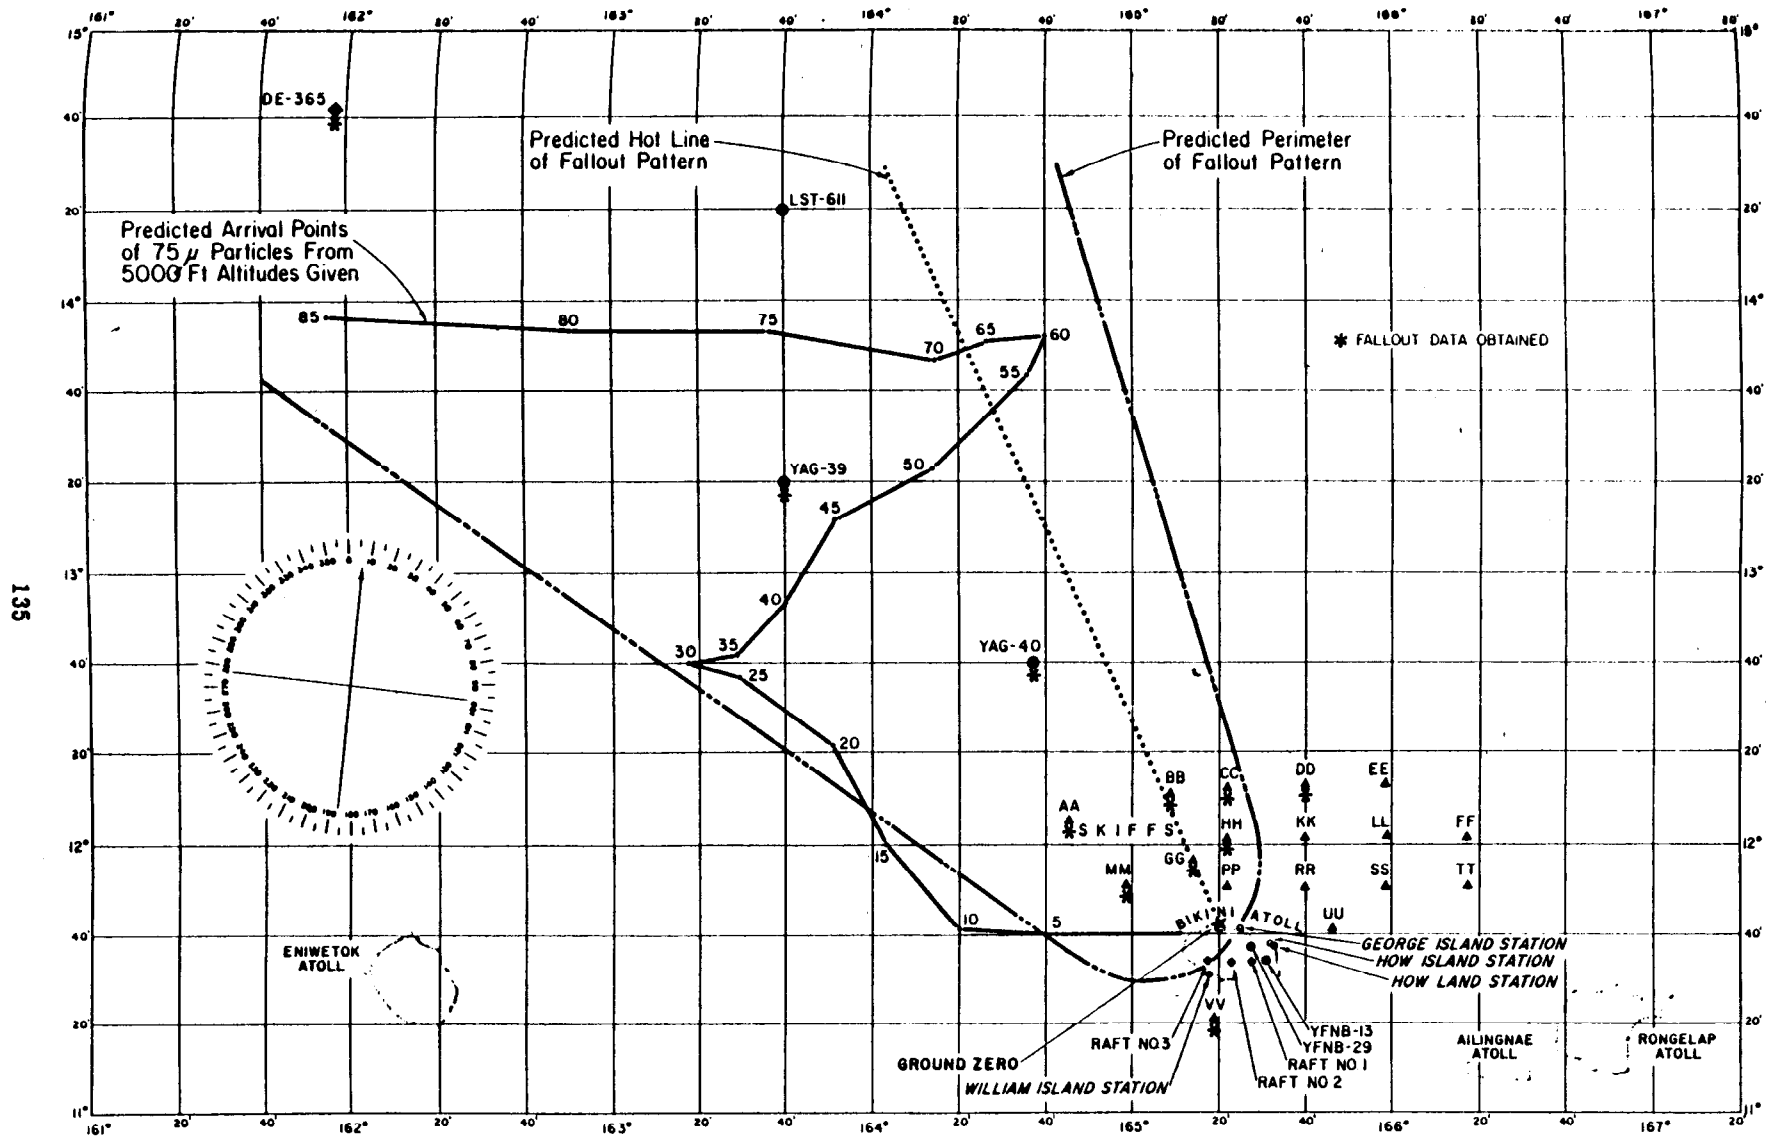


Figure 4.1 Approximate station locations and predicted fallout pattern, Shot Cherokee.

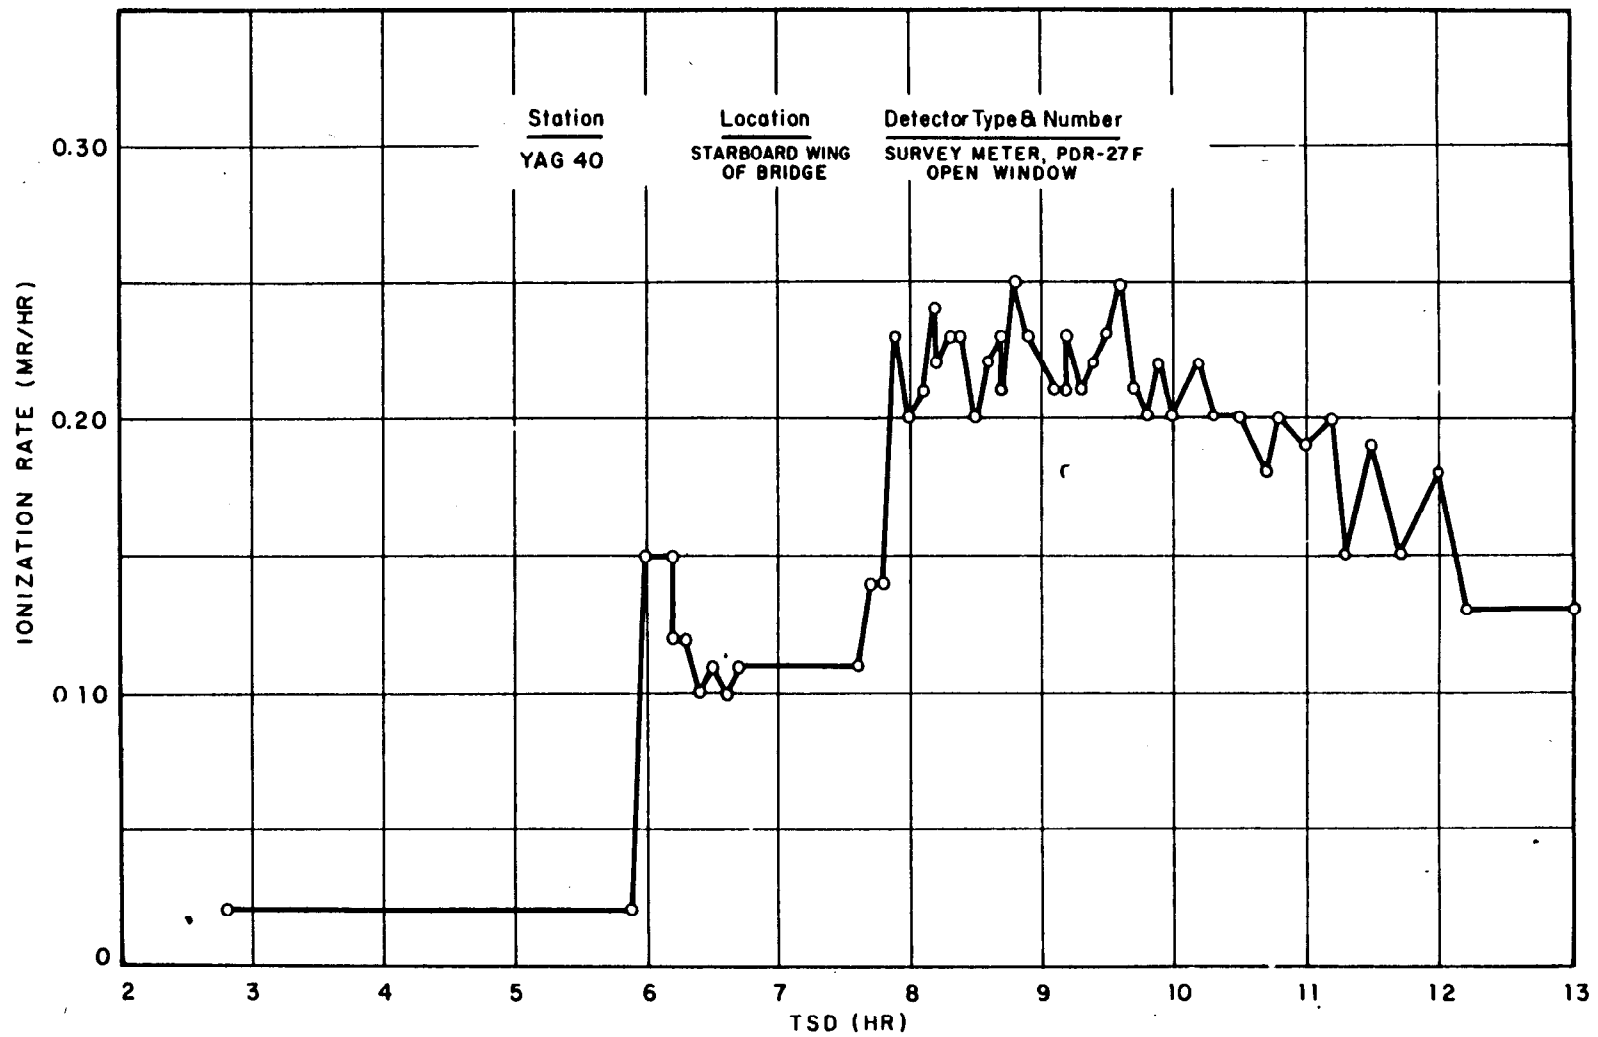


Figure 4.2 Survey-meter measurement of rate of arrival on YAG 40, Shot Cherokee.

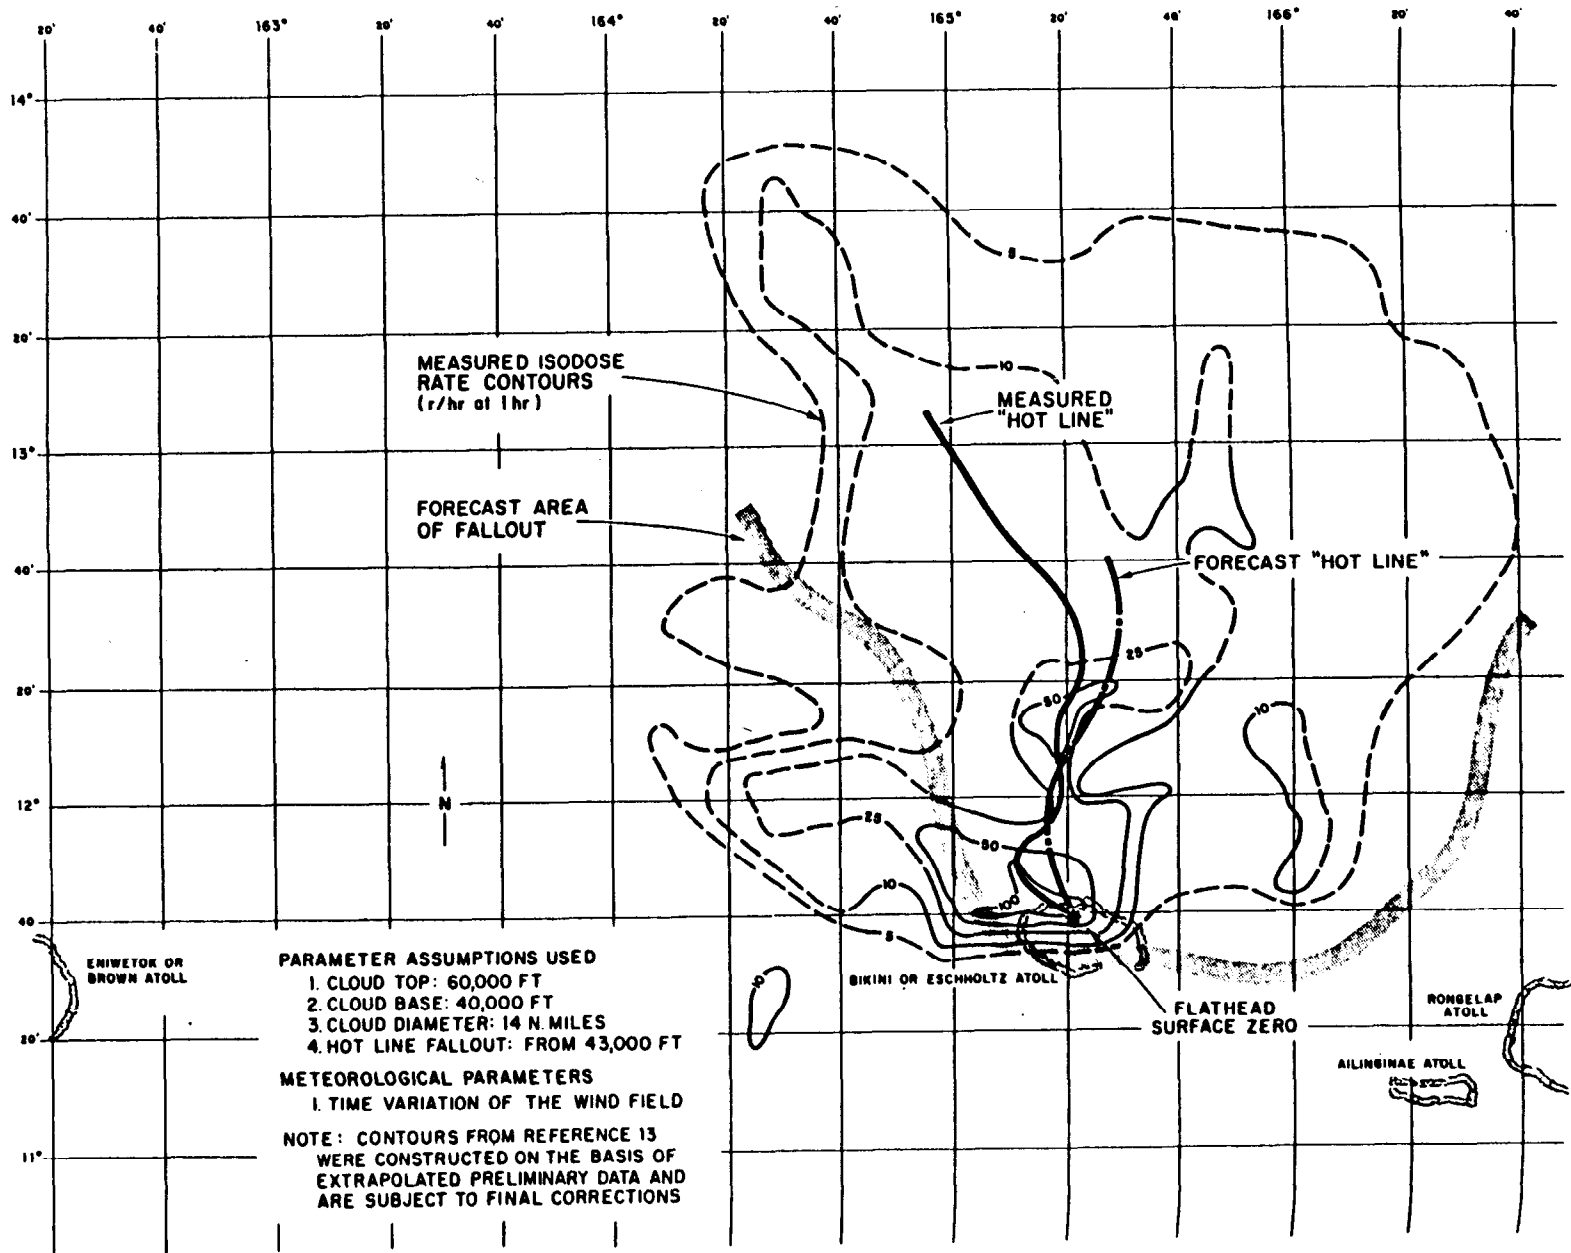


Figure 4.6 Predicted and observed fallout pattern, Shot Flathead.

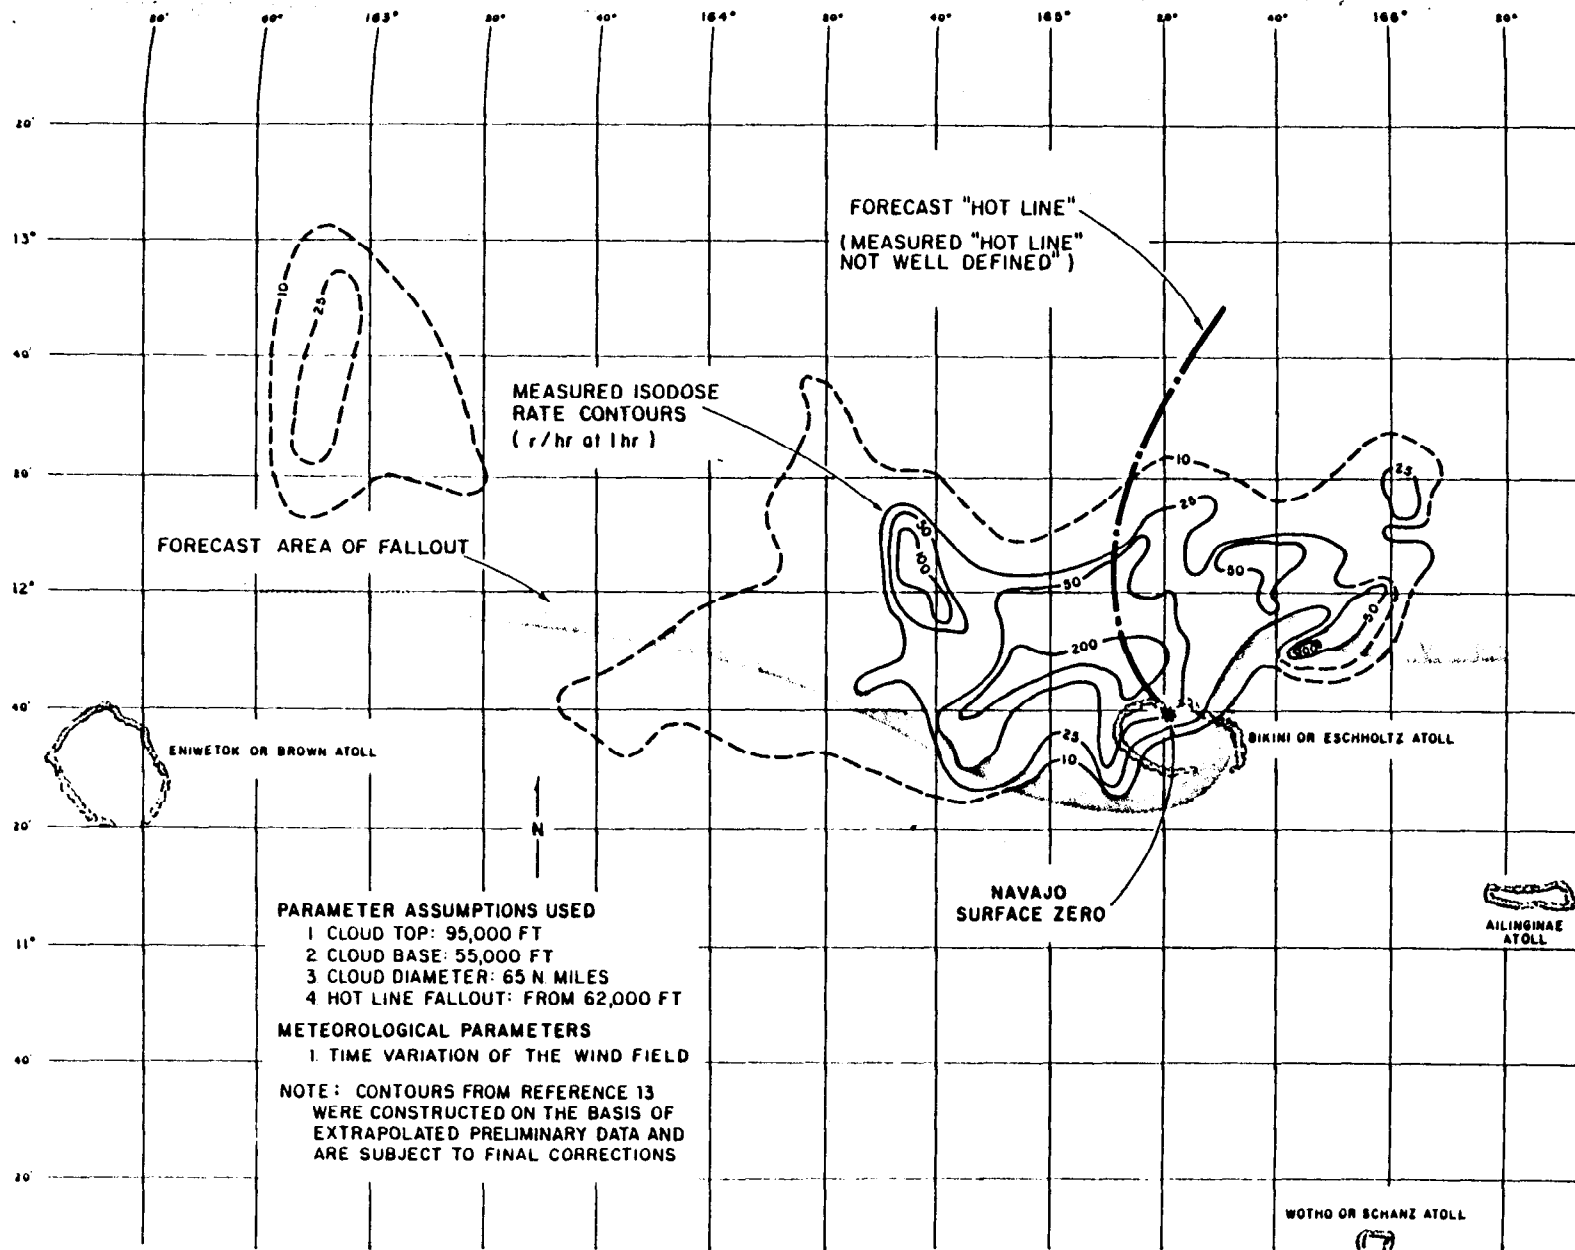


Figure 4.7 Predicted and observed fallout pattern, Shot Navajo.

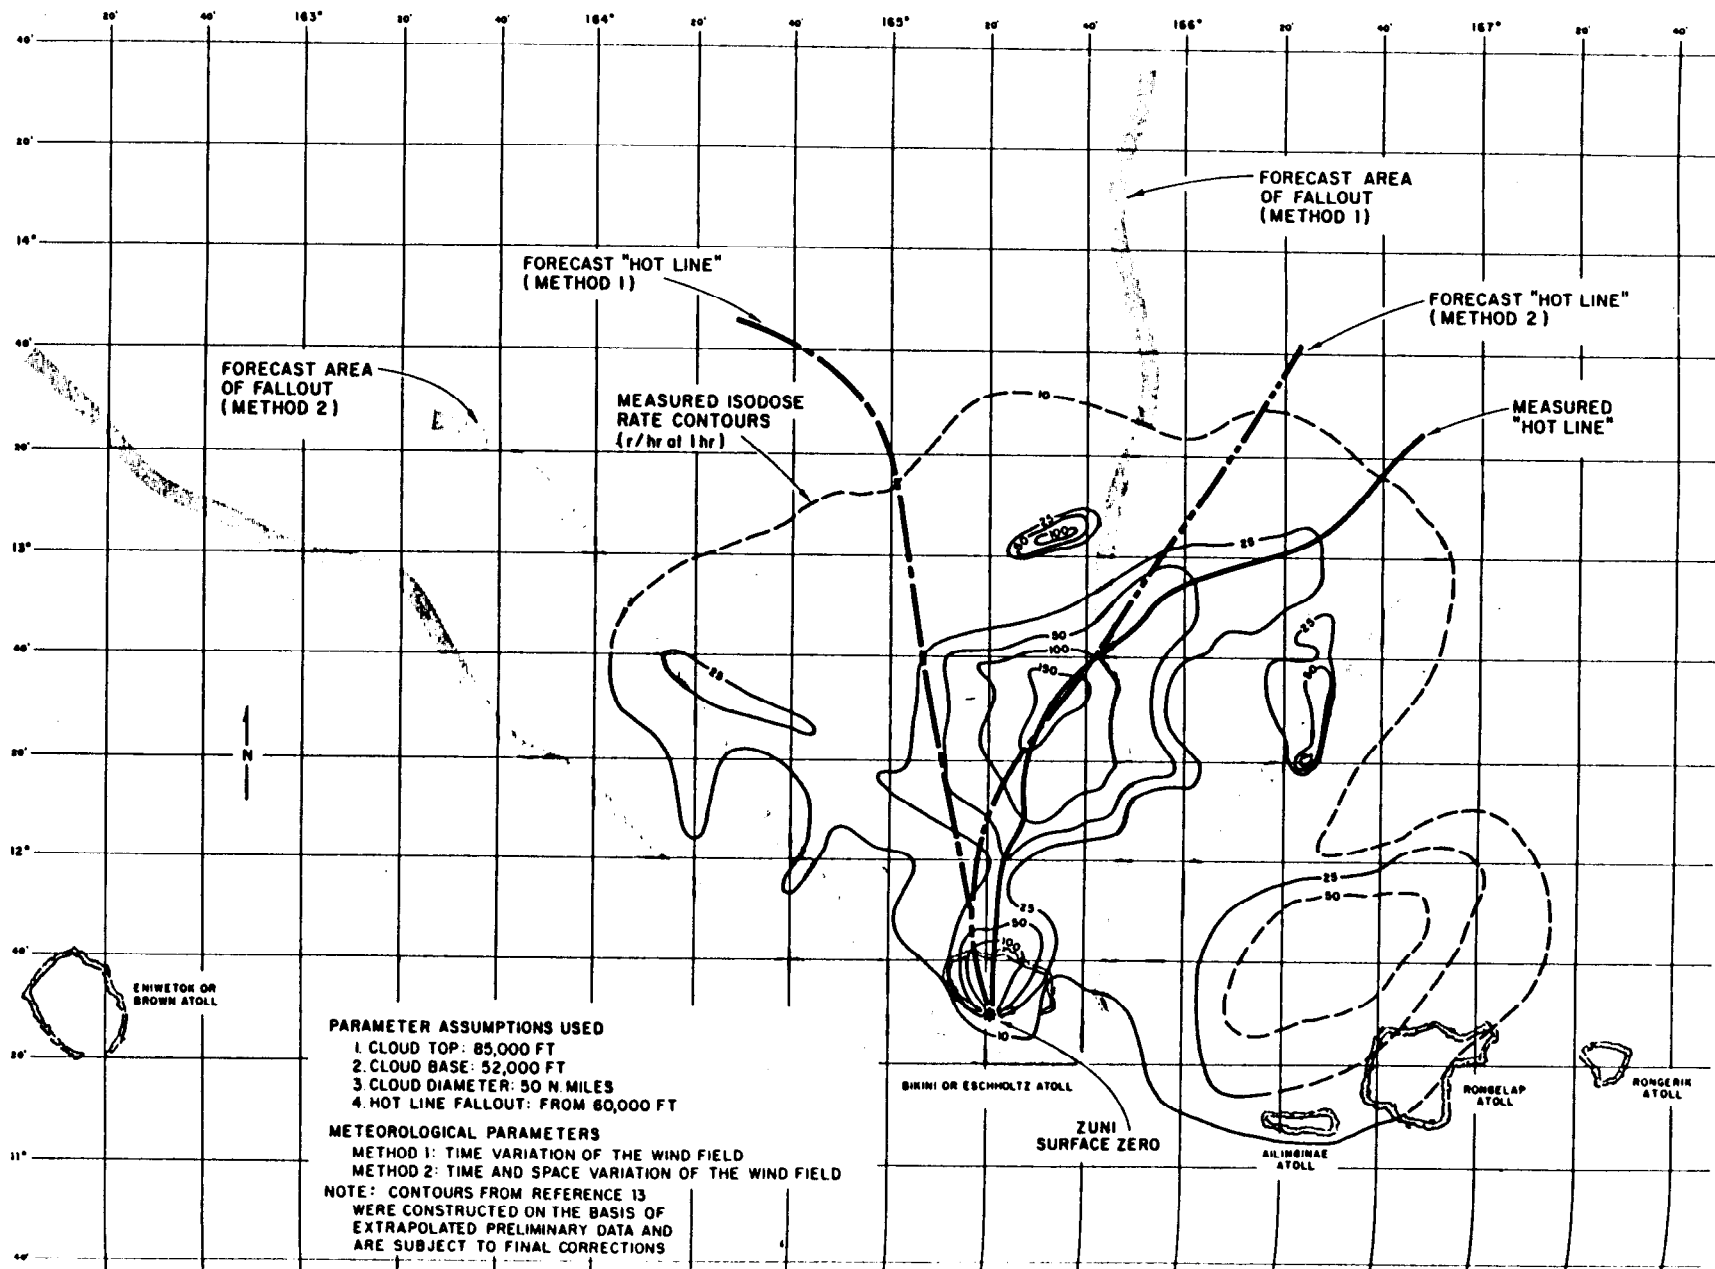


Figure 4.8 Predicted and observed fallout pattern, Shot Zuni.

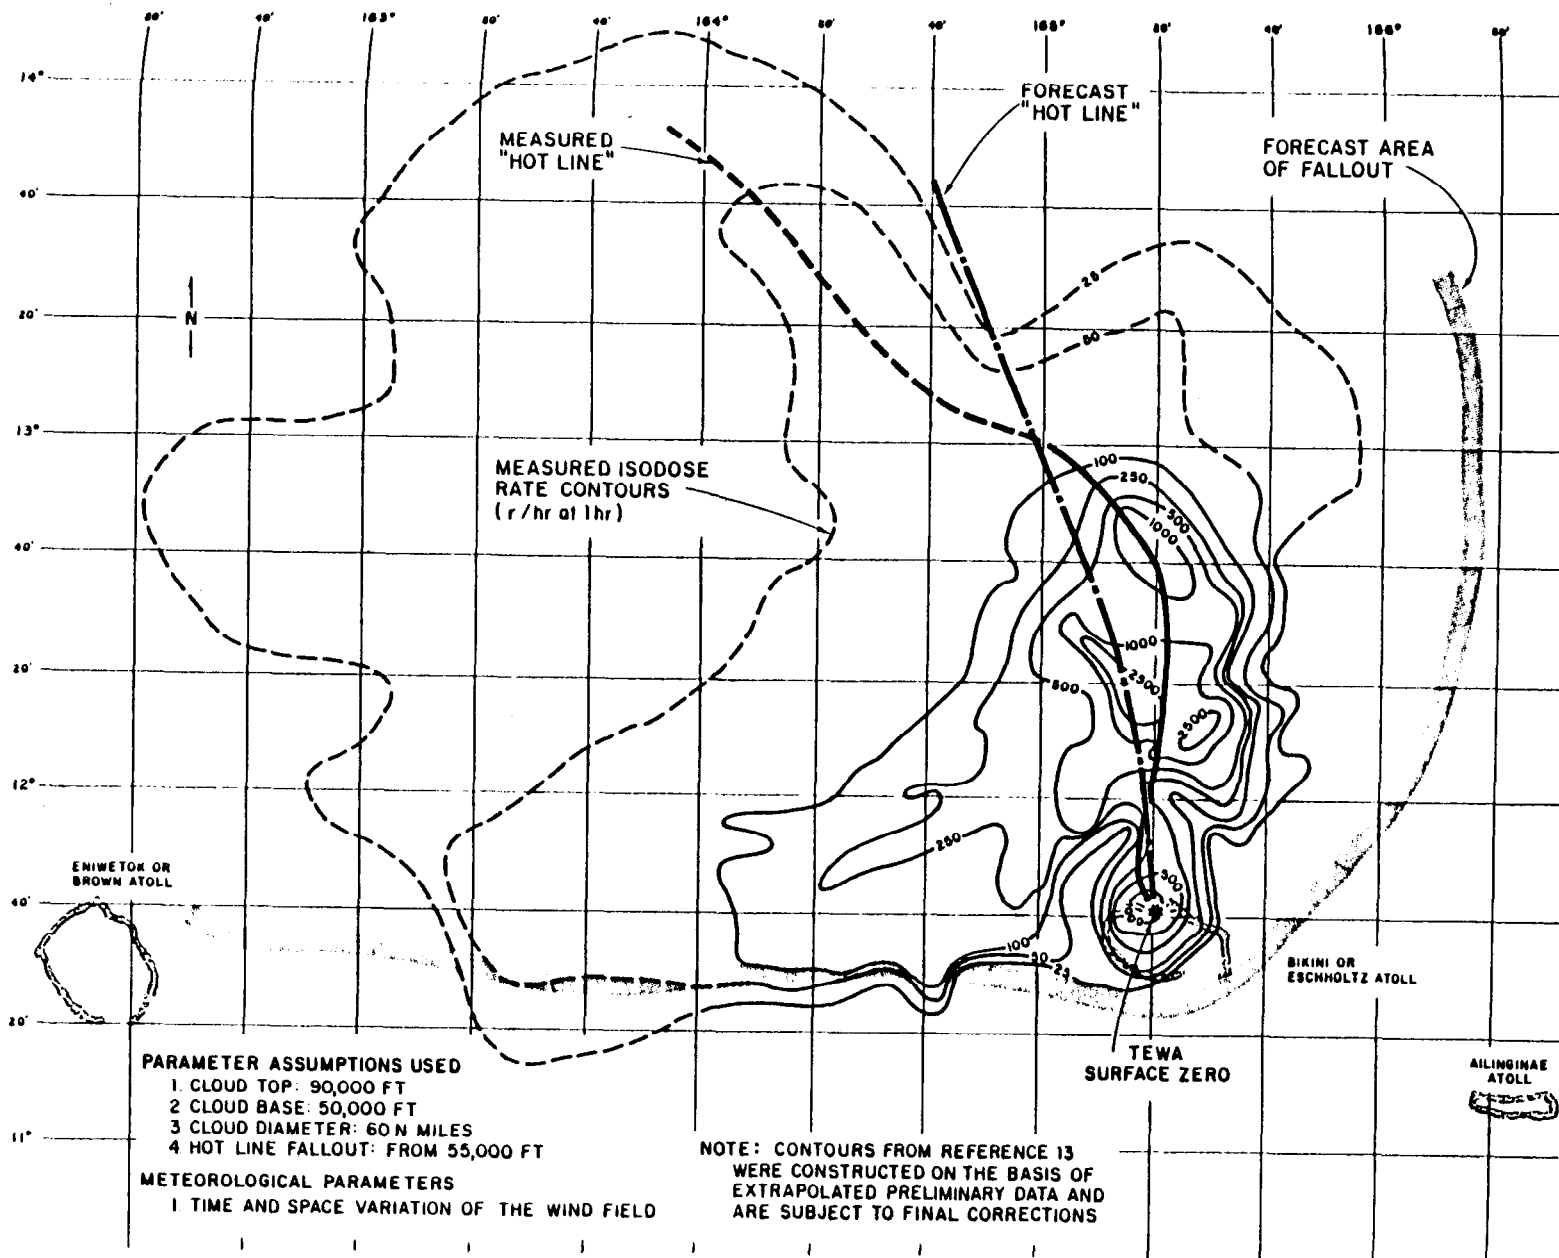


Figure 4.9 Predicted and observed fallout pattern, Shot Tewa.


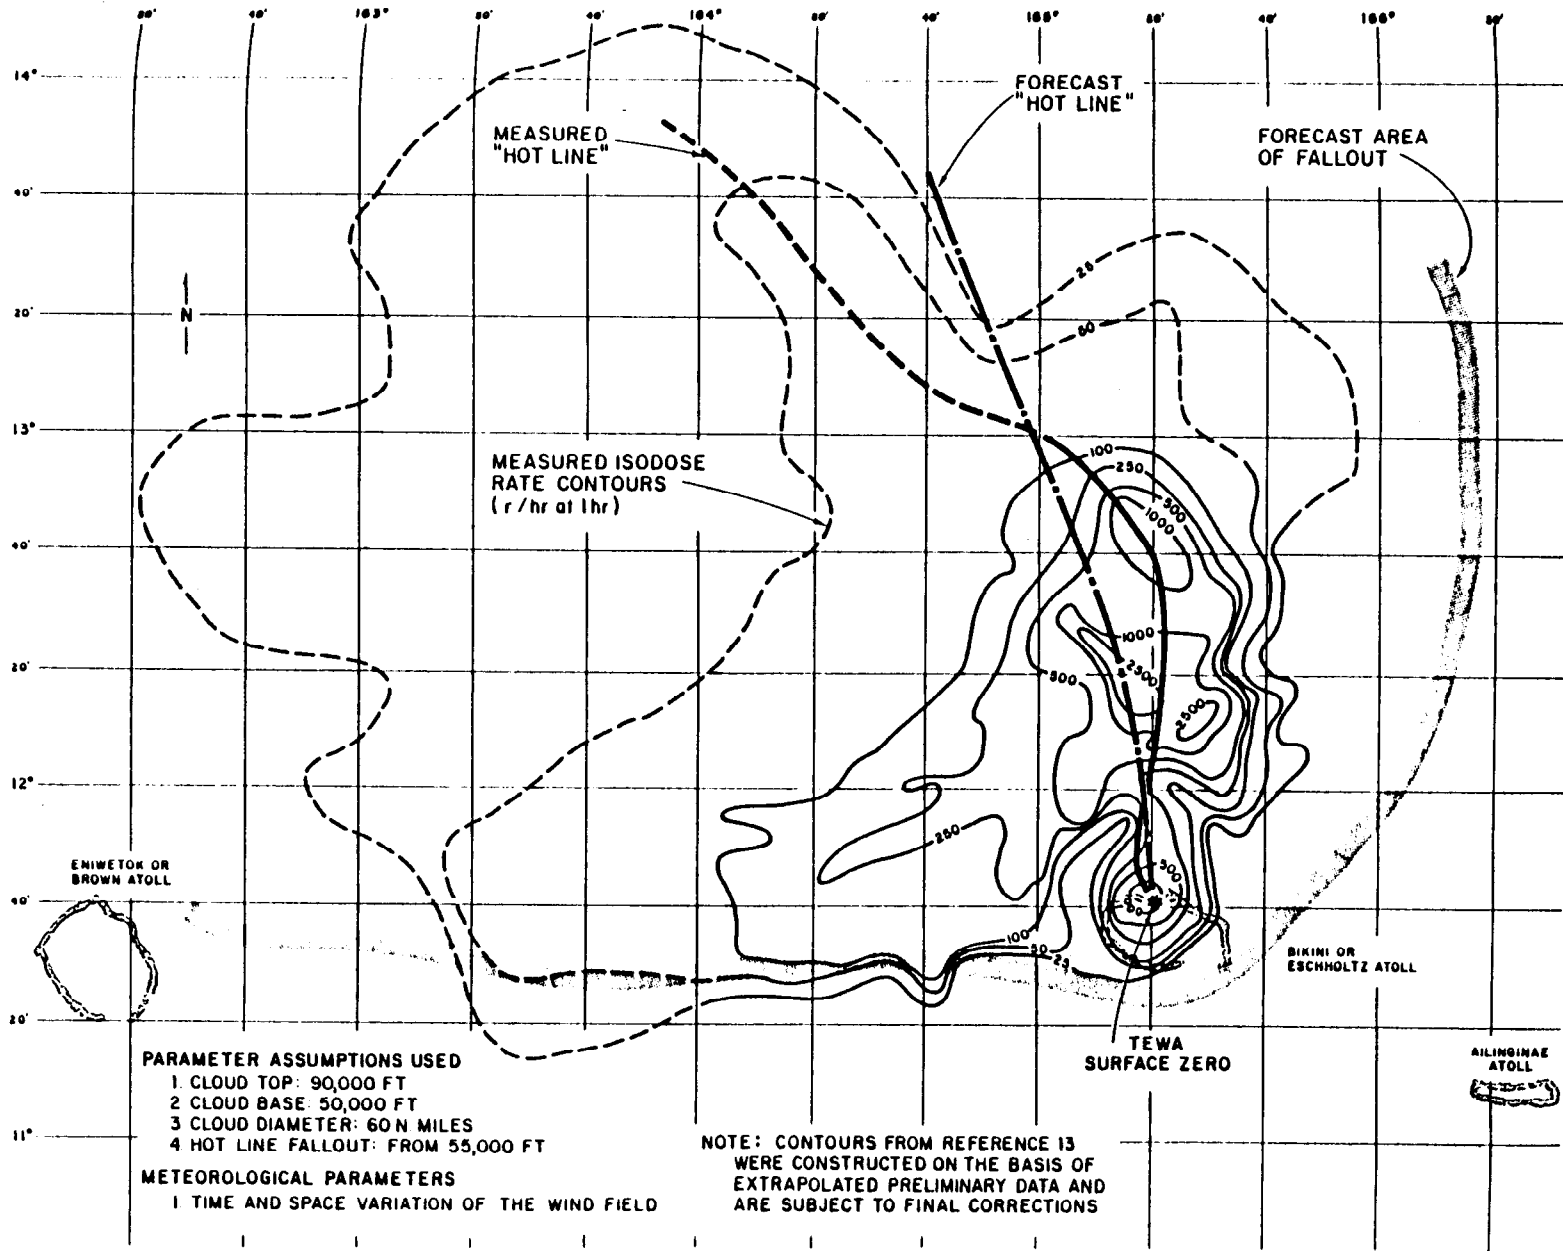



Figure 4.9 Predicted and observed fallout pattern, Shot Tewa.

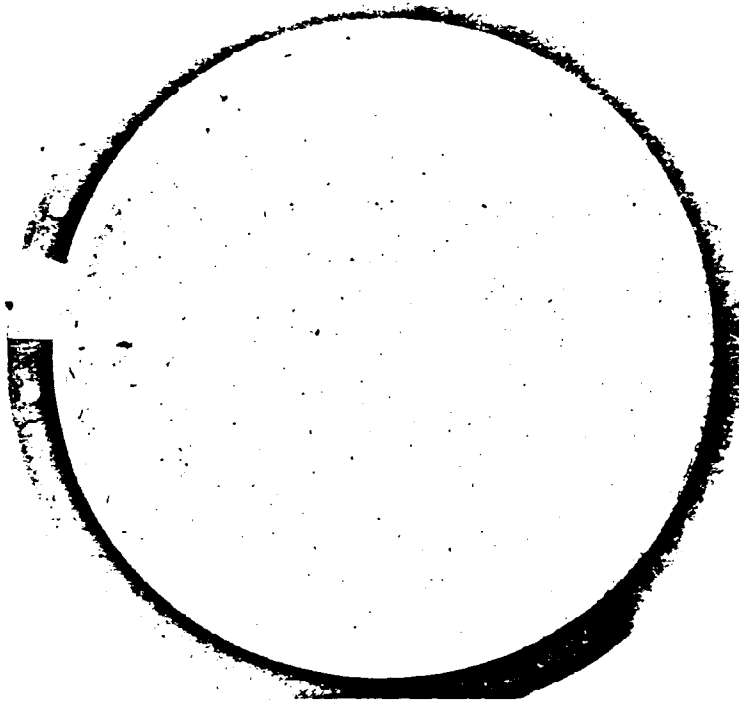

A HEAVY
COLLECTION
FAR OUT
15 MINUTE EXPOSURE

TRAY NO. 411

YAG 40, B-7
ZUNI

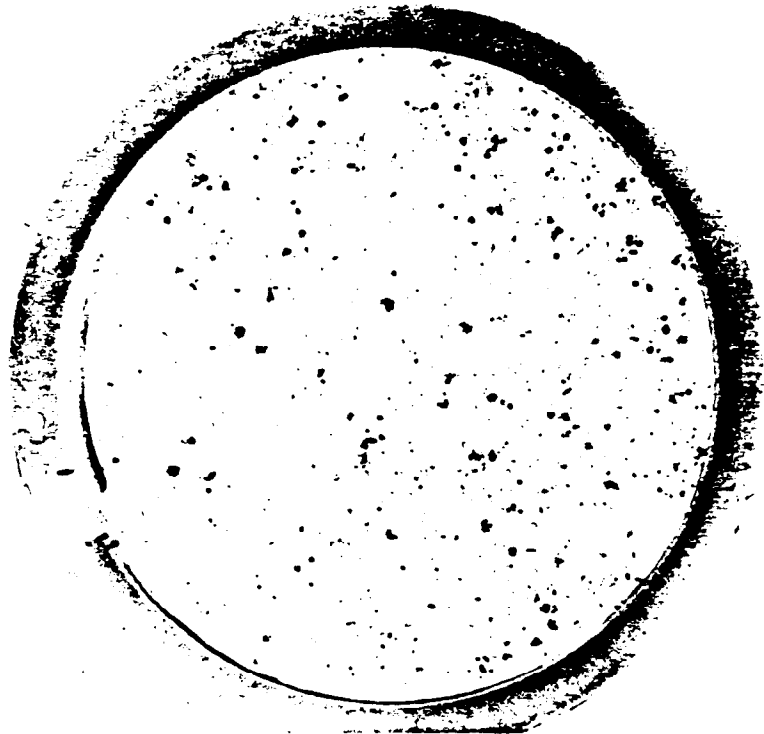

A HEAVY
COLLECTION
CLOSE IN
15 MINUTE EXPOSURE

TRAY NO. 1204

YFNB 13, E-57
ZUNI

Figure 4.10 Close and distant particle collections, Shot Zuni.

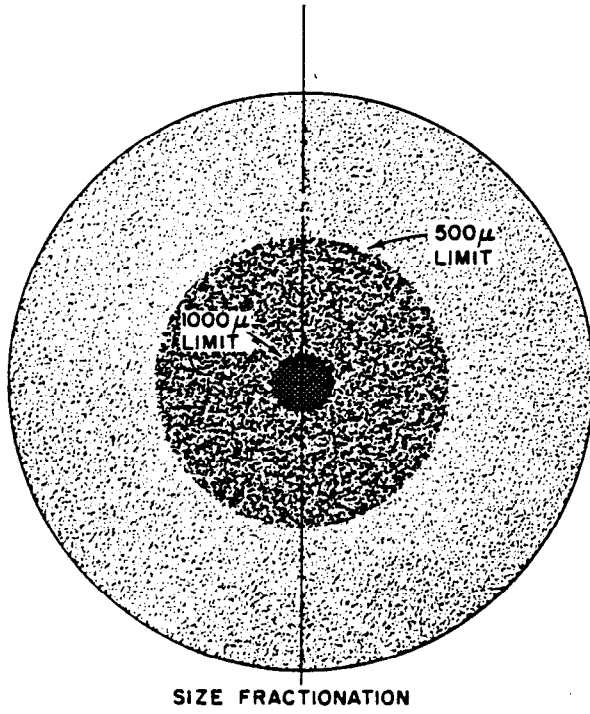
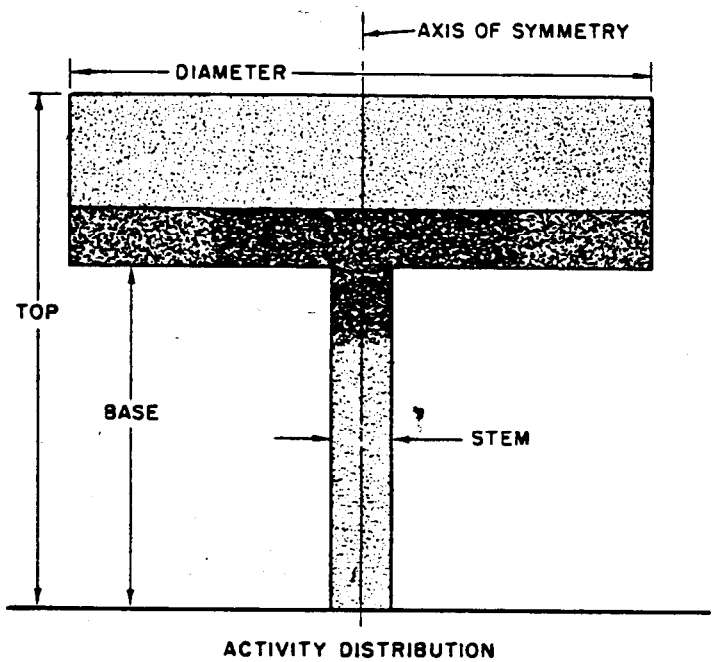


Figure 4.11 Cloud model for fallout prediction.

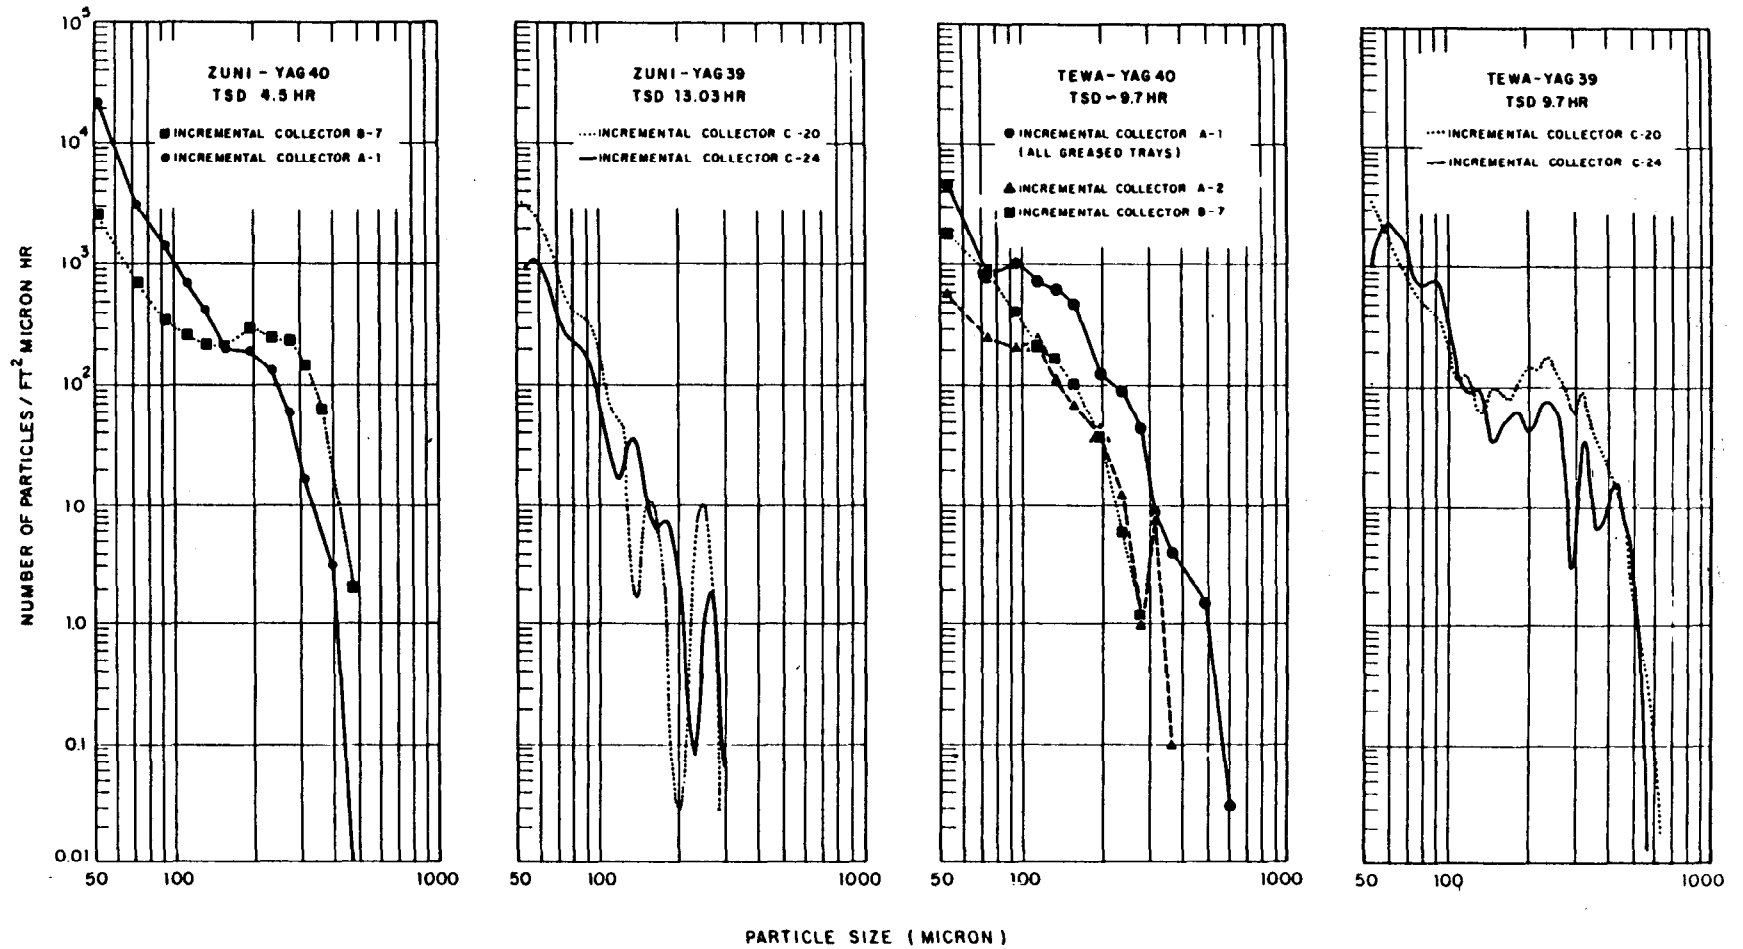


Figure 4.12 Comparison of incremental-collector, particle-size frequency distributions, Shots Zuni and Tewa.

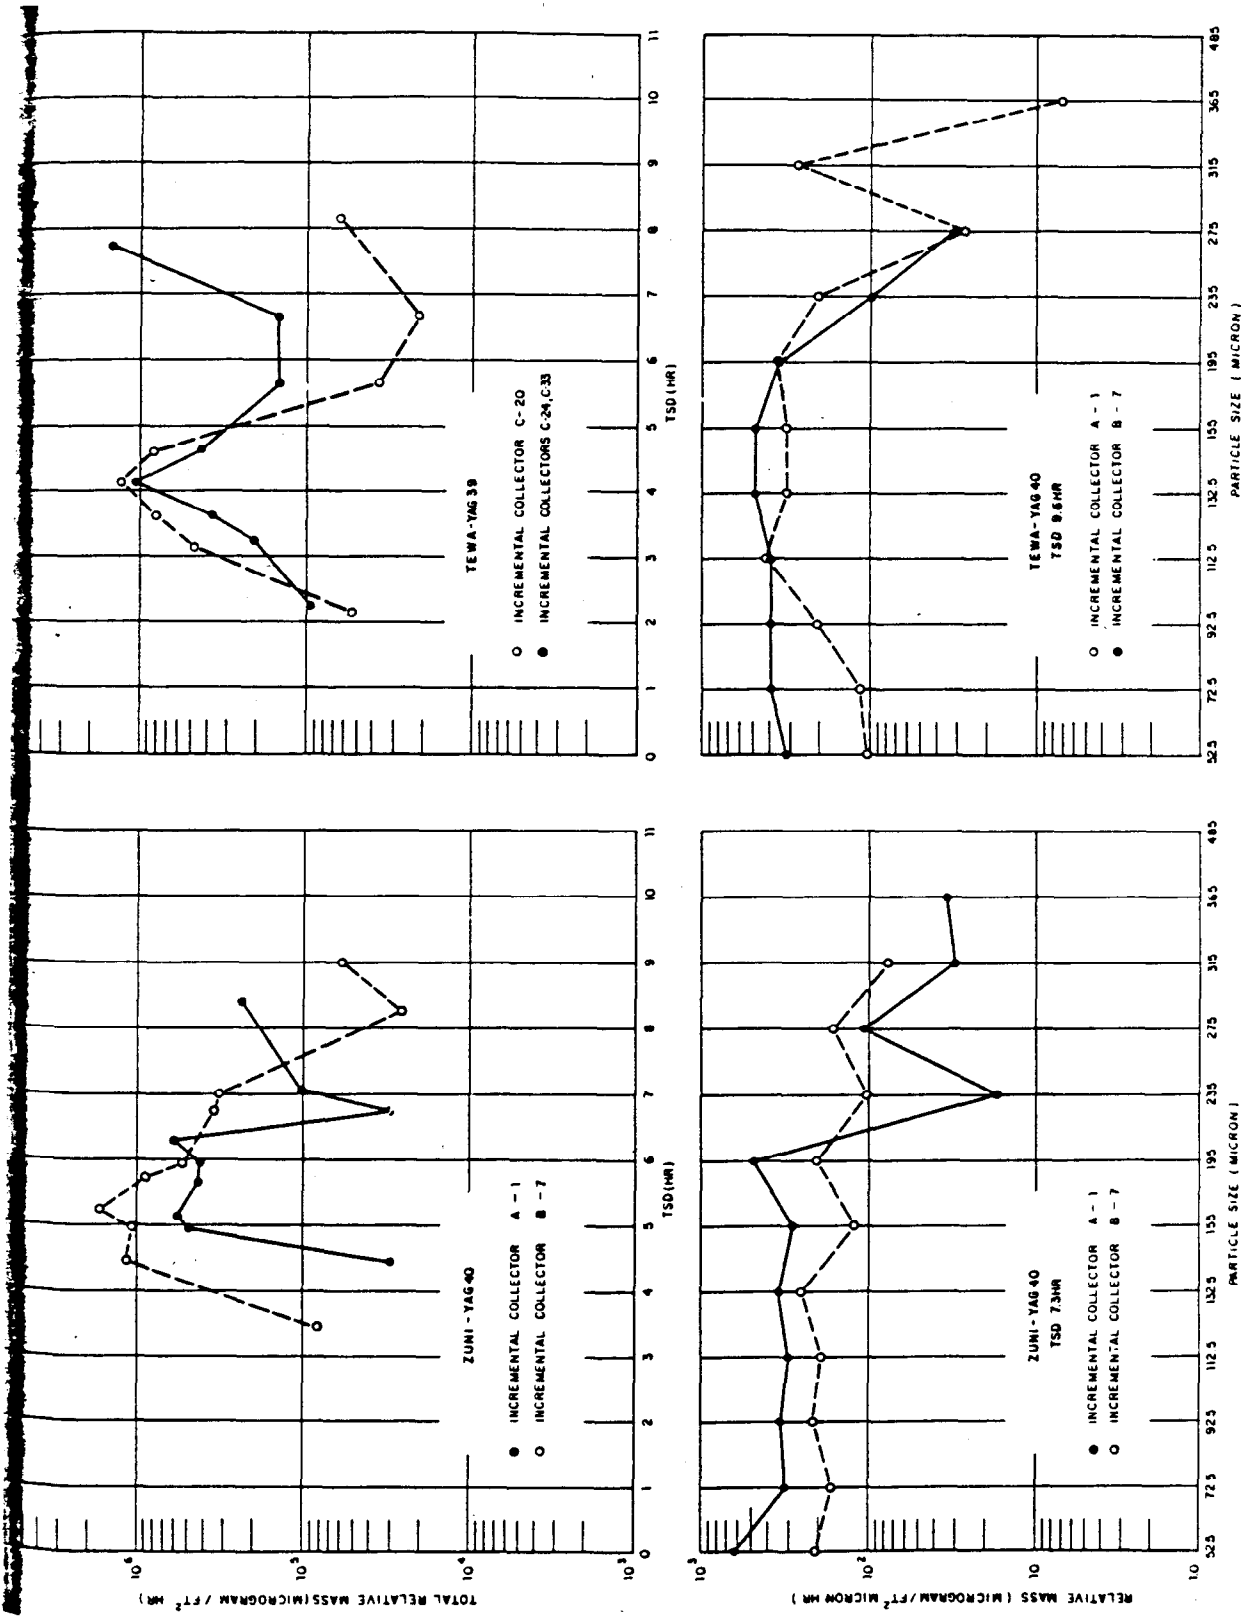


Figure 4.13 Comparison of incremental-collector, mass-arrival rates and variation with particle size, Shots Zuni and Tewa.

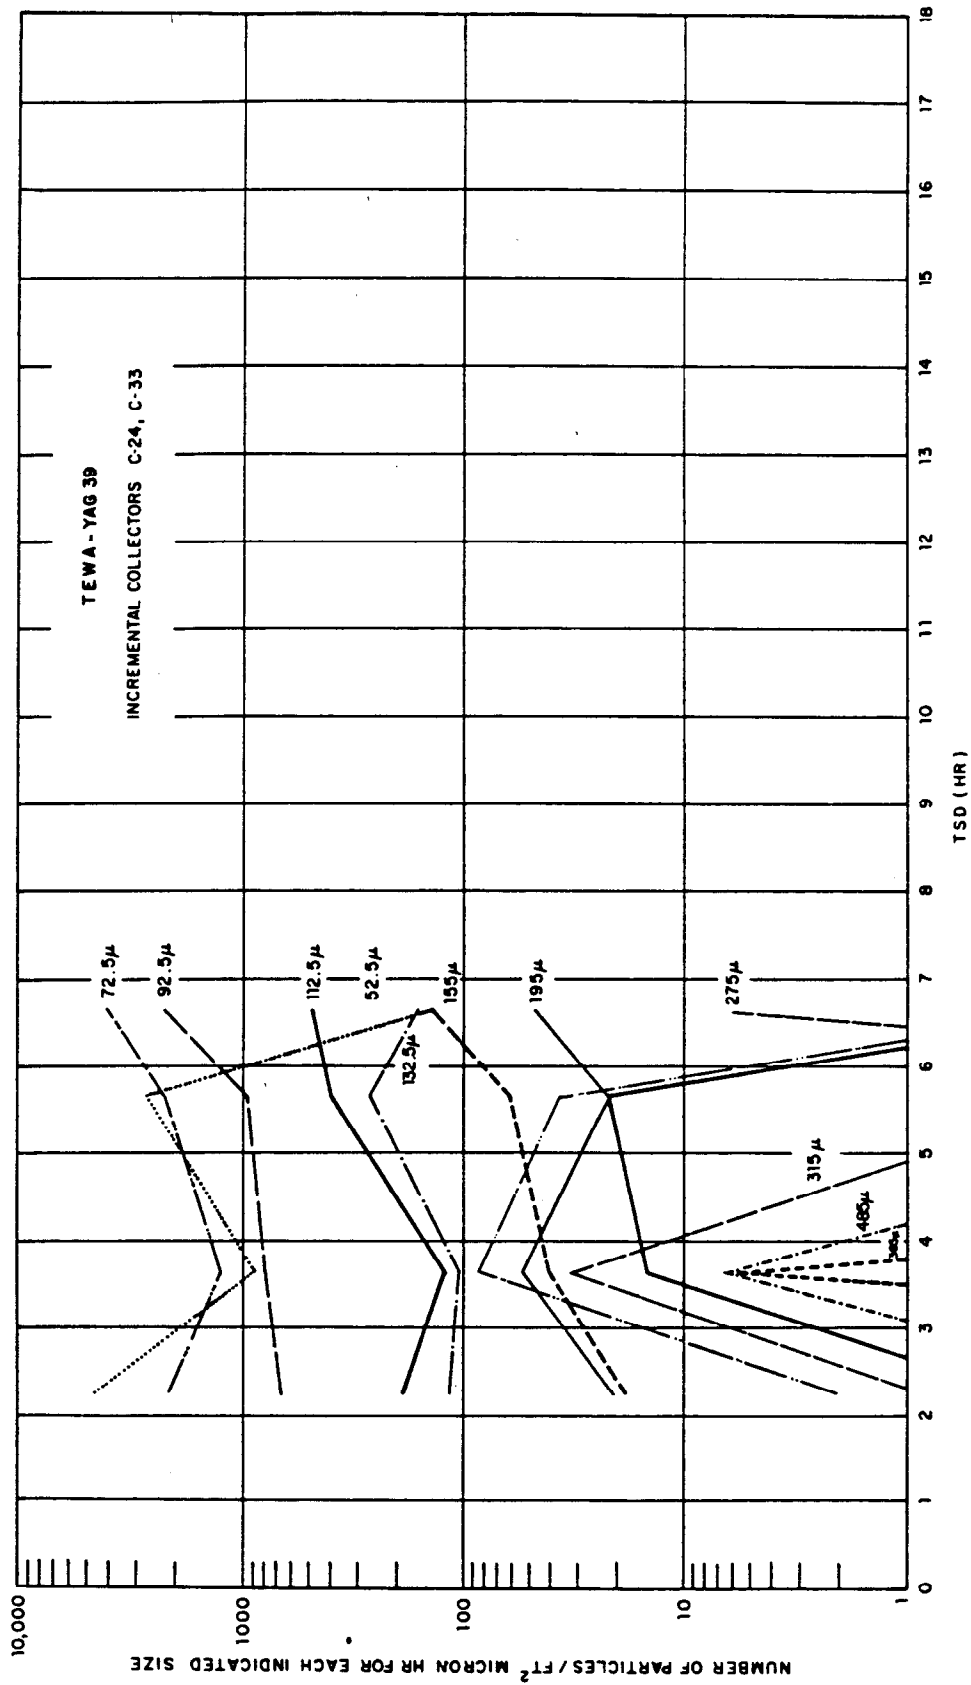


Figure 4.14 Comparative particle-size variation with time, YAG 39, Shot Tewa.

Chapter 5

CONCLUSIONS and RECOMMENDATIONS

5.1 CONCLUSIONS

5.1.1 Operational. The following features of project operations are concluded to have been satisfactory:

1. Emphasis on complete documentation of the fallout at a few points, rather than limited documentation at a large number of points. Because of this, integrated sets of data were obtained, better control of all measurements was achieved, and a number of important correlations became possible for the first time. It is a related conclusion that the care taken to locate project stations, and the close coordination maintained with the aerial and oceanographic survey projects, were necessary.
2. Concentration on specific measurements required by fallout theory, instead of on general observations and data collection. The results obtained by emphasizing time-dependent data promise to be of particular value in fallout research, as do the early-time measurements of particle properties made in the YAG 40 laboratory.
3. Devotion of laboratory work on the YAG 40 and Site Elmer to relative activity and associated measurements. In several cases, data were obtained that would otherwise have been lost or obscured by radioactive decay. Counting statistics were improved, and the confidence in all measurements and observations was increased by the elimination of intermediate handling. Conversely, chemical and radiochemical measurements, which require a disproportionate amount of effort in the field, could be made under more favorable conditions, although at the sacrifice of information on short-lived induced activities.
4. Utilization of standardized instrument arrays and procedures. Without this, measurements made at different locations could not have been easily related, and various correlations could not have been achieved. Instrument maintenance, sample recovery, and laboratory processing were considerably simplified. Because the use of the How Island station as a datum plane for all standardized instrumentation was an integral part of the overall concept, it should be noted that the station functioned as intended and obtained information of fundamental importance for data reduction and correlation.
5. Preservation of station mobility. It had not been possible to move both major and minor sampling arrays to conform with changes in shot location and wind conditions, much valuable data would have been lost. Some of the most useful samples came from the barges that were relocated between shots. Coordination of ship sampling operations from the Program 2 Control Center on the basis of late meteorological information and early incoming data also proved practical; sampling locations were often improved and important supplementary measurements added.
6. Determination of station locations by Loran. Despite the fact that it was difficult for the ships to hold position during sampling, adequate information on their locations as a function of time was obtained. Ideally, of course, it would be preferable for ships to remain stationary during sampling, using Loran only to check their locations. The deep-anchoring method used for the skiffs gave good results and appears to be appropriate for future use.
7. Establishment of organizational flexibility. The use of small teams with unified areas of responsibility and the capability of independent action during the instrument-arming and sample-recovery periods was a primary factor in withstanding operational pressures. The stabilizing influence provided by the sample-processing centers on Bikini and Eniwetok contributed significantly to the effectiveness of the system.

There were also certain features of project operations which were unsatisfactory:

1. The large size of the project. If more-limited objectives had been adopted, and the measurements to accomplish these objectives allotted to several smaller projects, the amount of field administrative work and the length of time key personnel were required to spend in the field could probably have been reduced. In future tests, the total number of shot participations should be kept to the minimum compatible with specific data requirements.

2. The difficulty of maintaining adequate communications between the test site and NRDL. Despite arrangements to expedite dispatches, frequent informal letters, and messages transmitted by sample couriers, several cases occurred where important information was delayed in transit.

3. The use of instruments developed by other projects. Malfunctions were frequent in such cases but were probably due partly to lack of complete familiarity with the design of the instrument. This is the principal reason why the water-sampling results are incomplete and of uncertain reliability.

4. The operational characteristics of certain project instruments. The time-of-arrival detectors (TOAD) were developed for the operation and had not been proof-tested in the field. They tended to give good results when located on stable stations, such as barges or islands, and poor results when located on stations like the skiffs. It seems probable that minor design modifications would suffice to make this a dependable instrument. The honeycomb inserts used in the open-close total collector (OCC) exhibited a tendency to spall and should be modified for future use. The sizes of the collecting areas of the always-open collector, Type 2 (AOC₂), and incremental collector (IC) should be increased if possible. Complete redesign of the gamma time-intensity recorder (TIR) to improve its response characteristics, reduce its size, and make it a self-contained unit was obviously required for future work and was initiated during the field phase.

5. The commitments of the project to supply early evaluations of field data. Because of the nature of fallout studies, inferences drawn from unreduced data may be misleading. Despite the urgency associated with studies of this kind, interim project reports should be confined to presenting the results of specific field measurements.

5.1.2 Technical. The general conclusions given below are grouped by subject and presented for the most part in the same order that the subjects are discussed in the preceding chapters. In a sense, the values tabulated and plotted in the text constitute the detailed conclusions, because they represent the numerical results derived from the reduced data of the appendixes. For this reason, numerical values will be extracted from the text only if some generality is evident or to illustrate an observed range. Although the conclusions presented are not necessarily those of the authors whose works have been referenced in the text, interpretations are usually compatible.

Buildup Characteristics.

1. The time from fallout arrival to peak radiation rate was approximately equal to the time of arrival for all stations and shots. Activity-arrival rate was roughly proportional to mass-arrival rate for the solid-particle shots, Zuni and Tewa. A similar result was obtained for outlying stations during Shot Flathead, although this proportionality did not hold for Shot Navajo nor for the close-in collections from Shot Flathead.

2. The shape of the activity-arrival-rate curve was not markedly different for solid- and slurry-particle shots. In both types of events, the time from the onset of fallout to the time when the radiation rate peaked was usually much shorter than the time required for the remainder of the fallout to be deposited. There was some tendency for slurry fallout to be more protracted and less concentrated in a single major arrival wave; however, statistical fluctuations due to low concentrations of particles and small collector areas were responsible for most of the rapid changes observed after the time of peak. Where fallout concentrations were sufficiently high, good time correlation was ordinarily obtained between peak rate of arrival and peak radiation rate.

3. Particle-size distributions varied continuously with time at each station during the solid-particle shots, activity arrival waves being characterized by sharp increases in the concentra-

tions of the larger particles. Because of background dust and unavoidable debris on the trays, correlation of the concentrations of smaller particles with radiological measurements was more difficult. The concentrations of the smallest sizes remained almost constant with time. Particle diameters gradually decreased with time at each station during the slurry-particle shots, though remaining remarkably constant at ~100 to 200 microns on the ships during the entire fallout period.

4. In the vicinity of the ships, the gross body of fallout activity for the slurry-particle shots penetrated to the thermocline from a depth of 10 to 20 meters at the rate of 3 to 4 m/hr. A considerable fraction of the activity for the solid-particle shots penetrated to the thermocline at about the same rate. This activity remained more or less uniformly distributed above the thermocline up to at least 2 days after the shot, and is presumed to have been in solution or associated with fine particles present either at deposition or produced by the breakup of solid aggregates in sea water. An unknown amount of activity, perhaps as much as 50 percent of the total, penetrated at a higher rate and may have disappeared below the thermocline during the solid-particle shots. It is unlikely that any significant amount of activity was lost in this way during the slurry-particle shots.

5. Fractionation of Mo^{99} , Np^{239} , and I^{131} occurred in the surface water layer following solid-particle deposition; a continuous variation in composition with depth is indicated. Only slight tendencies in this direction were noted for slurry fallout.

Physical, Chemical, and Radiological Characteristics.

1. The fallout from Shots Zuni and Tewa consisted almost entirely of solid particles similar to those observed after the land-surface shots during Operations Ivy and Castle, consisting of irregular, spheroidal, and agglomerated types varying in color from white to yellow and ranging in size from < 20 microns to several millimeters in diameter. Most of the irregular particles consisted primarily of calcium hydroxide with a thin surface layer of calcium carbonate, although a few unchanged coral particles were present; while the spheroidal particles consisted of calcium oxide and hydroxide, often with the same surface layer of calcium carbonate. The agglomerates were composed of calcium hydroxide with an outer layer of calcium carbonate. The particles almost certainly were formed by decarbonation of the original coral to calcium oxide in the fireball, followed by complete hydration in the case of the irregular particles, and incomplete hydration in the case of the other particles; the surface layer, which may not have been formed by deposition time, resulted from reaction with CO_2 in the atmosphere. The densities of the particles were grouped around 2.3 and 2.7 gm/cm³.

2. Radioactive black spherical particles, usually less than 1 micron in diameter, were observed in the fallout from Shot Zuni, but not in the fallout from Shot Tewa. Nearly all such particles were attached to the surfaces of irregular particles. They consisted partially of calcium iron oxide and could have been formed by direct condensation in the fireball.

3. The radionuclide composition of the irregular particles varied from that of the spheroidal and agglomerated particles. The irregular particles tended to typify the cloud-sample and distant-fallout radiochemistry, while the spheroidal and agglomerated particles were more characteristic of the gross fallout near ground zero. The irregular particles tended to be enriched in Ba^{140} - La^{140} and slightly depleted in Sr^{89} ; the spheroidal and agglomerated particles were depleted in these nuclides but were much higher in specific activity. It should be recognized that this classification by types may be an oversimplification, and that a large sample of individual particles of all types might show a continuous variation of the properties described. The inference is strong, nevertheless, that the fractionation observed from point to point in the fallout field at Shot Zuni was due to the relative abundance and activity contribution of some such particle types at each location.

4. The activities of the irregular particles varied roughly as their surface area or diameter squared, while those of the spheroidal particles varied as some power higher than the third. Indications are that the latter were formed in a region of higher activity concentration in the cloud, with the activity diffusing into the interior while they were still in a molten state. Activity was not related to particle density but varied with the weight of irregular particles in a manner consistent with a surface-area function.

5. The fallout from Shots Flathead and Navajo collected at the ship stations was made up entirely of slurry particles consisting of about 80 percent sodium chloride, 18 percent water, and 2 percent insoluble solids composed primarily of oxides of calcium and iron. The individual insoluble solid particles were generally spherical and less than 1 micron in diameter, appearing to be the result of direct condensation in the fireball.

6. The radionuclide composition of individual slurry drops could not be assessed because of insufficient activity, but the results of combining a number of droplets were similar to those obtained from gross fallout collections. In general, much less fractionation of radionuclides was evident in the slurry-particle shots than in the solid-particle shots. The amount of chloride in a slurry drop appeared to be proportional to the drop activity for the ship stations at Shot Flathead; however, variability was experienced for Shot Navajo, and the relation failed for both shots at close-in locations. Conflicting data was obtained on the contribution of the insoluble solids to the total drop activity. While the slurry nature of the fallout and certain properties such as drop diameters, densities, and concentrations have been adequately described, further experimentation is required to establish the composition of the insoluble solids, and the partition of activity among the components of the drop.

Radionuclide Composition and Radiation Characteristics.

1. The activities of products resulting from slow-neutron fission of U^{235} are sufficiently similar to those resulting from device fission to be quantitatively useful. It should also be noted that the absolute calibration of gamma counters is feasible, permitting calculation of the count-per-disintegration ratio of any nuclide whose photon-decay scheme is known. For establishing the quantity of a given nuclide in a complex mixture, radiochemistry is the method of choice; at the present time, gamma-ray spectrometry appears less reliable, even for nuclides readily identifiable. In addition, gross spectra obtained with a calibrated spectrometer led to computed counting rates for a laboratory gamma counter which were generally low.

2. Fractionation of radionuclides occurred in the fallout of all surface shots considered. By several criteria, such as R-values and capture ratios, Shot Navajo was the least fractionated, with fractionation increasing in Shots Flathead, Tewa, and Zuni. For Shot Zuni, the fractionation was so severe that the ionization per fission of the standard cloud sample was ~ 5 to 6 times greater than for close-in fallout samples. Important nuclides usually deficient in the fallout were members of the decay chains of antimony, xenon, and krypton, indicating that the latter products, because of their volatilities or rare-gas state, do not combine well with condensing or unaltered carrier particles. Although empirical methods have been employed to correct for fractionation in a given sample, and to relate the fractionation observed from sample to sample at Shot Zuni, the process is not well understood. As yet, no method is known for predicting the extent of fractionation to be expected for arbitrary yield and detonation conditions.

3. Tables of values are given for computing the infinite-field ionization rate for any point in the fallout field where the composition and fission density are known. The same tables permit easy calculation of the contribution of any induced nuclide to the total ionization rate. Based on How Island experience, rates so obtained are approximately twice as high as a survey meter would indicate. It is evident that unless fractionation effects, terrain factors, and instrument-response characteristics are quantitatively determined, accurate estimates of the fraction of the device in the local fallout cannot be obtained by summing observed dose-rate contours.

Correlations.

1. The maximum fission densities observed during the various shots were, in fissions per square foot, approximately 4×10^{15} for Shot Tewa, 8×10^{14} for Shot Zuni, 6×10^{14} for Shot Flathead, 9×10^{13} for Shot Navajo, and 9×10^{10} for Shot Cherokee. The fallout which was deposited during Shot Cherokee arrived as slurry particles similar to those produced by Shots Flathead and Navajo and appeared to be relatively unfractionated with regard to radionuclide composition; the total amount deposited was small, however, and of no military significance.

2. Reasonable agreement between the predicted and observed perimeters and central axes of the preliminary fallout patterns for Shots Zuni and Tewa was achieved by assuming the radioactive material to be concentrated largely in the lower third of the cloud and upper third of the stem, restricting particles larger than 1,000 and 500 microns in diameter to the inner 10 per-

cent and 50 percent of the cloud radius, respectively, and applying methods based on accepted meteorological procedures. Modified particle fall-rate equations were used and corrections were made for time and spatial variation of the winds. With the same assumptions, rough agreement was also achieved for Shots Flathead and Navajo by neglecting spatial variation of the winds, in spite of the gross differences in the character of the fallout. The reason for this agreement is not well understood. Predicted fallout arrival times were often shorter by 10 to 25 percent than the measured times, and the maximum particle sizes predicted at the times of arrival, peak, and cessation were usually smaller by 10 to 50 percent than the measured sizes.

3. The weighted mean values of the activity collected per unit area on the standard platform constitute a set of relative measurements, varying as a function of wind velocity and particle terminal velocity. The exact form of this function is not known; it appears, however, that the airflow characteristics of the platform were sufficiently uniform over the range of wind velocities encountered to make particle terminal velocity the controlling factor. The activity-per-unit-area measurements made on the samples from the skiffs may constitute a second set of relative values, and those made on samples from the raft and island minor arrays, a third set, closely related to the second.

4. The maximum platform collections should be utilized as the best estimate of the total amount of activity deposited per unit area. An error of about ± 50 percent should be associated with each value, however, to allow for measurement error, collection bias, and other uncertainties. Although this procedure is strictly applicable only in those cases where single-wind deposition prevailed, comparable accuracy may be achieved by doubling the mean platform value and retaining the same percent error.

5. Decay of unfractionated fission products according to $t^{-1.2}$ is adequate for planning and estimating purposes. Whenever fractionation exists or significant induced activities are present, however, an actual decay curve measured in a counter with known response characteristics, or computed for the specific radionuclide composition involved, should be used. Errors of 50 percent or more can easily result from misapplication of the $t^{-1.2}$ rule in computations involving radiological effects.

6. It is possible to determine fraction of device by iron or residual uranium with an accuracy comparable to a Mo^{99} determination, but the requirements for a large sample, low background, and detailed device information are severe. In general, fractions calculated from these elements tended to be high. Analysis of copper, aluminum, and lead produced very high results which were not reported. It is probable that backgrounds from all sources were principally responsible, because the amounts of these elements expected from the Redwing devices were quite small.

7. The time-intensity recorders consistently measured less gamma ionization dose than film dosimeters located on the same platforms. In those cases where the geometry remained nearly constant and comparisons could be made, this deficiency totaled ~ 30 to 60 percent, in qualitative agreement with the response characteristics of the instrument estimated by other methods.

8. Because nearly equal amounts of fallout per unit area were collected over approximately the same time interval by the incremental collector, high volume filter, and open-close collectors on the ship platforms, it appears that air filtration through a medium exposed to direct fallout at face velocities up to 1.7 mph offers no substantial advantage over passive fallout sampling. It is apparent that under such conditions the collections are not proportional to the volume of air filtered, and should not be interpreted as implying the existence of an independent aerosol hazard.

9. The contamination index, which provides a measure of the relative fallout ionization rate for unit device yield per unit area, is approximately proportional to the ratio of fission yield to total yield of the device.

5.2 RECOMMENDATIONS

It is believed that the preceding results emphasize the desirability of making the following additional measurements and analyses.

1. Time of fallout arrival, rate of arrival, time of peak, and time of cessation should be

measured at a number of widely separated points for as many different sets of detonation conditions as possible. Because these quantities represent the end result of a complex series of interactions between device, particle, and meteorological parameters, additional relationships between them would not only provide interim operational guides, but would also be useful as general boundary conditions to be satisfied by model theory.

2. The particle-size distributions with time reported herein should be further assessed to remove the effects of background dust collections and applied to a more detailed study of particle size-activity relationships. For future use, an instrument capable of rapidly sizing and counting fallout particles in the diameter-size range from about 20 to 3,000 microns should be developed. Several promising instruments are available at the present time, and it is probable that one of these could be adapted for the purpose. While appropriate collection and handling techniques would have to be developed as an integral part of the effort, it is likely that improved accuracy, better statistics, and large savings in manpower could be achieved.

3. Controlled measurements should be made of the amount of solid-particle activity which penetrates to depths greater than the thermocline at rates higher than ~ 3 to 4 m/hr. Supporting measurements sufficient to define the particle size and activity distribution on arrival would be necessary at each point of determination. Related to this, measurements should be made of radionuclide fractionation with depth for both solid and slurry particles; in general, the solubility rates and overall dispersion behavior of fallout material in ocean water should be studied further. Underwater gamma detectors with improved performance characteristics and underwater particle collectors should be developed as required. Underwater data are needed to make more-accurate estimates from measured contours of the total amount of activity deposited in the immediate vicinity of the Eniwetok Proving Ground.

4. A formation theory for slurry particles should be formulated. Separation procedures should be devised to determine the way in which the total activity and certain important radionuclides are partitioned according to physical-chemical state. Microanalytical methods of chemical analysis applicable both to the soluble and insoluble phases of such particles are also needed. The evidence is that the solids present represent one form of the fundamental radiological contaminant produced by nuclear detonations and are for this reason deserving of the closest study. The radiochemical composition of the various types of solid particles from fallout and cloud samples should also receive further analysis, because differences related to the history of the particles and the radiation fields produced by them appear to exist.

5. A fallout model appropriate for shots producing only slurry particles should be developed. At best, the fact that it proved possible to locate the fallout pattern for shots of this kind, using a solid-particle model, is a fortuitous circumstance and should not obscure the fact that the precipitation and deposition mechanisms are unknown. Considering the likelihood in modern warfare of detonations occurring over appreciable depths of ocean water near operational areas, such a model is no less important than a model for the land-surface case. It would also be desirable to expand the solid-particle model applied during this operation to include the capability of predicting radiation contours on the basis of conventional scaling principles or the particle size-activity relationships given earlier.

6. Theoretical and experimental studies of radionuclide fractionation with particle type and spatial coordinates should be continued. This is a matter of the first importance, for if the systematic variations in composition suggested herein can be established, they will not only make possible more accurate calculation of the radiation fields to be expected, but may also lead to a better understanding of the basic processes of fallout-particle formation and contamination.

7. A series of experiments should be conducted to determine the true ionization rates and those indicated by available survey meters for a number of well-known individual radionuclides deposited on various kinds of terrain. Although the absolute calibration of all gamma counters and a good deal of logistic and analytical effort would be required, the resulting data would be invaluable for comparison with theoretical results. Also in this connection, the proposed decay schemes of all fission products and induced activities should be periodically revised and brought up to date.

8. Some concept of fraction of device which is meaningful in terms of relative gamma-radiation hazard should be formulated. The total ionization from all products of a given device could, for example, be computed for a $4\text{-}\pi$ ionization chamber. Decay-corrected measurement in the chamber of any fallout sample, whether fractionated or not, would then give a quantity representing a fraction of the total gamma-ray hazard. The definition of contamination index should also be expanded to include the concept of contamination potential at any point in the fallout area. In addition to the effects of the fission-to-total-yield ratio of the device on the resultant radiation field, the final value should include the effects of the particle characteristics and chemical composition of the material as they affect chemical availability and decontamination. Ideally, the value should be derivable entirely from the parameters of the device and its environment, so that it could be incorporated in model theory and used as part of conventional prediction procedures.

9. Additional bias studies of collecting instruments and instrument arrays should be performed. If possible, a total collector, an incremental collector, and a standard collector array should be developed whose bias characteristics as a function of wind velocity and particle terminal velocity are completely known. This problem, which can be a source of serious error in fallout measurements, has never been satisfactorily solved. To do so will require full-scale tests of operational instruments using controlled airflow and particles of known shape, density, and size distribution. Collectors should be designed to present the largest collecting areas possible, compatible with other requirements, in order to improve the reliability of subsequent analyses.

10. More-detailed measurements of oceanographic and micro-meteorological variables should accompany any future attempt to make oceanographic or aerial surveys of fallout regions, if contour construction is to be attempted. It appears, in fact, that because of the difficulty of interpreting the results of such surveys, their use should be restricted to locating the fallout area and defining its extent and general features.

11. Based on the results presented in this report, and the final reports of other projects, a corrected set of fraction-of-device contours should be prepared for the Redwing shots. These contours may represent the best estimate of local fallout from megaton detonations available to date; however, more-accurate estimates could be made in the future by collecting and analyzing enough total-fallout samples of known bias to permit the construction of iso-amount contours for various important radionuclides.

REFERENCES

1. C. E. Adams, F. R. Holden, and N. R. Wallace; "Fall-Out Phenomenology"; Annex 6.4, Operation Greenhouse, WT-4, August 1951; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential.
2. I. G. Poppoff and others; "Fall-Out Particle Studies"; Project 2.5a-2, Operation Jangle, WT-395 (in WT-371), April 1952; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Secret Restricted Data.
3. R. K. Laurino and I. G. Poppoff; "Contamination Patterns at Operation Jangle"; USNRDL-399, 30 April 1953; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
4. W. B. Heidt, Jr. and others; "Nature, Intensity, and Distribution of Fall-Out from Mike Shot"; Project 5.4a, Operation Ivy, WT-615, April 1953; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
5. R. L. Stetson and others; "Distribution and Intensity of Fallout"; Project 2.5a, Operation Castle, WT-915, January 1956; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Secret Restricted Data.
6. Headquarters, Joint Task Force Seven, letter; Subject: "Radiological Surveys of Several Marshall Island Atolls," 18 March 1954.
7. T. R. Folsom and L. B. Werner; "Distribution of Radioactive Fallout by Survey and Analyses of Sea Water"; Project 2.7, Operation Castle, WT-935, April 1959; Scripps Institution of Oceanography, La Jolla, California, and U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Secret Restricted Data.
8. H. D. LeVine and R. T. Graveson; "Radioactive Debris from Operation Castle Aerial Survey of Open Sea Following Yankee-Nectar"; NYO-4618.
9. M. B. Hawkins; "Determination of Radiological Hazard to Personnel"; Project 2.4, Operation Wigwam, WT-1012, May 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Official Use Only.
10. R. L. Stetson and others; "Distribution and Intensity of Fallout from the Underground Shot"; Project 2.5.2, Operation Teapot, WT-1154, March 1958; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
11. D. C. Borg and others; "Radioactive Fall-Out Hazards from Surface Bursts of Very High Yield Nuclear Weapons"; AFSWP-507, May 1954; Headquarters, Armed Forces Special Weapons Project, Washington 13, D. C.; Secret Restricted Data.
12. "Fall-Out Symposium"; AFSWP-895, January 1955; Armed Forces Special Weapons Project, Washington 25, D. C.; Secret Restricted Data.
13. V. A. J. VanLint and others; "Fallout Studies During Operation Redwing"; Program 2, Operation Redwing, ITR-1354, October 1956; Field Command, Armed Forces Special Weapons Project, Sandia Base, Albuquerque, New Mexico; Secret Restricted Data.
14. R. T. Graveson; "Fallout Location and Delineation by Aerial Surveys"; Project 2.64, Operation Redwing, ITR-1318, February 1957; U. S. AEC Health and Safety Laboratory, New York, New York; Secret Restricted Data.

15. F. D. Jennings and others; "Fallout Studies by Oceanographic Methods"; Project 2.62a, Operation Redwing, ITR-1316, November 1956; University of California, Scripps Institution of Oceanography, La Jolla, California; Secret Restricted Data.
16. M. Morgenthau and others; "Land Fallout Studies"; Project 2.65, Operation Redwing, ITR-1319, December 1956; Radiological Division, Chemical Warfare Laboratories, Army Chemical Center, Maryland; Secret Restricted Data.
17. C. F. Miller and P. Loeb; "The Ionization Rate and Photon Pulse Rate Decay of Fission Products from Slow Neutron Fission of U^{235} "; USNRDL-TR-247, August 1958; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
18. P. D. LaRiviere; "The Relationship of Time of Peak Activity from Fallout to Time of Arrival"; USNRDL-TR-137, February 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
19. J. W. Hendricks; "Fallout Particle Size Measurements from Operation Redwing"; USNRDL-TR-264, July 1958; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential.
20. S. Baum; "Behavior of Fallout Activity in the Ocean"; NRDLD Technical Report (in publication); U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Secret.
21. C. E. Adams; "The Nature of Individual Radioactive Particles. II. Fallout Particles from M-Shot, Operation Ivy"; USNRDL-408, 1 July 1953; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential.
22. C. E. Adams; "The Nature of Individual Radioactive Particles. IV. Fallout Particles from the First Shot, Operation Castle"; USNRDL-TR-26, 17 January 1955; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential.
23. C. E. Adams; "The Nature of Individual Radioactive Particles. V. Fallout Particles from Shots Zuni and Tewa, Operation Redwing"; USNRDL-TR-133, 1 February 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential.
24. C. E. Adams and J. D. O'Connor; "The Nature of Individual Radioactive Particles. VI. Fallout Particles from a Tower Shot, Operation Redwing"; USNRDL-TR-208, December 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
25. W. Williamson, Jr.; "Investigation and Correlation of Some Physical Parameters of Fallout Material"; USNRDL-TR-152, 28 March 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
26. J. Mackin and others; "Radiochemical Analysis of Individual Radioactive Fallout Particles from a Land Surface Detonation"; USNRDL-TR-386, September 1958; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
27. C. D. Coryell and N. Sugarman; "Radiochemical Studies: The Fission Products"; Book 3; McGraw-Hill, 1951.
28. "Radiochemical Procedures in Use at the University of California Radiation Laboratory, Livermore"; UCRL-4377, 10 August 1954; University of California Radiation Laboratory, Livermore, California.
29. L. D. McIsaac; "Determination of Np^{239} , "Total Fissions," Mo^{99} , and Ce^{141} in Fission Product Mixtures by Gamma-Ray Scintillation Spectrometry"; USNRDL-TR-72, 5 January 1956; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
30. H. K. Chan; "Activity-Size Relationship of Fallout Particles from Two Shots, Operation Redwing"; USNRDL-TR-314, February 1959; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.

31. N. H. Farlow and W. R. Schell; "Physical, Chemical, and Radiological Properties of Slurry Particulate Fallout Collected During Operation Redwing"; USNRDL-TR-170, 5 May 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
32. W. R. Schell; "Physical Identification of Micron-Sized, Insoluble Fallout Particles Collected During Operation Redwing"; USNRDL-TR-364, 24 September 1959; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
33. N. H. Farlow; "Quantitative Analysis of Chloride Ion in 10^{-6} to 10^{-12} Gram Particles"; Analytical Chemistry; 29: 883, 1957.
-
34. L. R. Bunney and N. E. Ballou; "Bomb-Fraction Measurement Techniques"; USNRDL-TR-176, September 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Secret Restricted Data.
-
35. M. Honma; "Flame Photometric Determination of Na, K, Ca, Mg, and Sr in Seawater"; USNRDL-TR-62, September 1955; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
36. M. Honma; "Flame Photometric Determination of Na, K, Ca, Mg, and Sr in Coral"; Unpublished data; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California.
37. F. D. Snell and C. T. Snell; "Colorimetric Methods of Analysis"; Vol. II Third Edition; D. Van Nostrand Co., New York; 1949.
38. A. P. Smith and F. S. Grimaldi; "The Fluorimetric Determination of Uranium in Non-saline and Saline Waters, Collected Papers on Methods of Analysis for Uranium and Thorium"; Geological Survey Bulletin 1006; U. S. Government Printing Office, Washington, D. C.; 1954.
39. A. E. Greendale and M. Honma; "Glove Box and Associated Equipment for the Removal of Radioactive Fallout from Hexcell Collectors"; USNRDL-TR-157, May 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
40. M. Honma and A. E. Greendale; "Correction for Hexcell Background in Fallout Samples"; Unpublished data; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California.
41. R. C. Bolles and N. E. Ballou; "Calculated Activities and Abundances of U^{235} Fission Products"; USNRDL-456, August 1956; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
42. C. F. Miller; "Response Curves for USNRDL 4-Pi Ionization Chamber"; USNRDL-TR-155, May 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
43. P. D. LaRiviere; "Response of Two Low-Geometry Scintillation Counters to Fission and Other Products"; USNRDL-TR-303, February 1959; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
44. C. F. Miller; "Proposed Decay Schemes for Some Fission-Product and Other Radionuclides"; USNRDL-TR-160, 17 May 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
-
45. C. F. Miller; "Analysis of Fallout Data. Part III; The Correlation of Some Castle Fallout Data from Shots 1, 2, and 3"; USNRDL-TR-222, May 1958; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Secret Restricted Data.
46. V. A. J. VanLint; "Gamma Rays from Plane and Volume Source Distributions"; Program 2, Operation Redwing, ITR-1345, September 1956; Weapons Effects Tests, Field Command, Armed Forces Special Weapons Project, Sandia Base, Albuquerque, New Mexico; Confidential Restricted Data.

47. "The Effects of Nuclear Weapons"; U. S. Atomic Energy Commission, Washington, D. C., June 1957; Unclassified.
48. L. E. Glendenin; "Determination of Strontium and Barium Activities in Fission"; NNES IV, 9, Paper 236, 1951.
49. D. N. Hume; "Determination of Zirconium Activity by the Barium Fluozirconate Method"; NNES IV, 9, Paper 245, 1951.
50. E. M. Scadden; "Improved Molybdenum Separation Procedure"; Nucleonics 15, 102, 1957.
51. L. E. Glendenin; "Improved Determination of Tellurium Activity in Fission"; NNES IV, 9, Paper 274, 1951.
52. E. Mizzan; "Phosphotungstate Precipitation Method of Analysis of Radioactive Cesium in Solutions of Long-Lived Fission Products"; AECL Report PDB-128, July 1954.
53. L. E. Glendenin and others; "Radiochemical Determination of Cerium in Fission"; Anal. Chem. 27, 59, 1955.
54. L. Wish and M. Rowell; "Sequential Analysis of Tracer Amounts of Np, U, and Pu in Fission-Product Mixtures by Anion Exchange"; USNRDL-TR-117, 11 October 1956; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
55. "Salted Weapons (C)"; AFSWP SWPDV-11-942.6, May 1957; Secret Restricted Data.
56. J. O. Blomeke; "Nuclear Properties of U²³⁵ Fission Products"; ORNL-1783, November 1955; Oak Ridge National Laboratory, Oak Ridge, Tennessee; Unclassified.
57. W. E. Thompson; "Spectrometric Analysis of Gamma Radiation from Fallout from Operation Redwing"; USNRDL-TR-146, 29 April 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Confidential Restricted Data.
58. "The Effects of Atomic Weapons"; U. S. Atomic Energy Commission, Washington, D. C., Revised September 1950; Unclassified.
59. K. Way and E. P. Wigner; "The Rate of Decay of Fission Products"; MDDC 1194, August 1947; Unclassified; also Phys. Rev. 73, 1318, 1948.
60. H. F. Hunter and N. E. Ballou; "Simultaneous Slow Neutron Fission of U²³⁵ Atoms. Individual Total Rates of Decay of the Fission Products"; USNRDL ADC-65, April 1949; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
61. C. F. Miller; "Gamma Decay of Fission Products from the Slow-Neutron Fission of U²³⁵"; USNRDL-TR-187, 11 July 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.
62. "Radiological Recovery of Fixed Military Installations"; Navy, Bureau of Yards and Docks, NavDocks TPPL-13; Army Chemical Corps TM 3-225, interim revision, April 1958; Unclassified.
63. E. R. Tompkins and L. B. Werner; "Chemical, Physical, and Radiochemical Characteristics of the Contaminant"; Project 2.6a, Operation Castle, WT-917, September 1955; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Secret Restricted Data.
64. H. V. Sverdrup, M. W. Johnson, and R. H. Fleming; "The Oceans, Their Physics, Chemistry, and General Biology"; Prentice-Hall, New York, 1942.
65. K. O. Emery, J. L. Tracey, Jr., and H. S. Ladd; "Geology of Bikini and Nearby Atolls. Bikini and Nearby Atolls: Part 1, Geology"; Geological Survey Professional Paper 260-A, U. S. Government Printing Office, Washington, D. C., 1954.
66. S. C. Foti; "Construction and Calibration of a Low Geometry Scintillation Counter"; Un-

published data, U. S. Naval Radiological Defense Laboratory, San Francisco 24, California.

67. E. A. Schuert; "A Fallout Forecasting Technique with Results Obtained at the Eniwetok Proving Ground"; USNRDL-TR-139, 3 April 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.

68. E. A. Schuert; "A Fallout Plotting Device"; USNRDL-TR-127, February 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.

69. L. Fussell, Jr.; "Cloud Photography"; Project 9.1a, Operation Redwing, ITR-1343, March 1957; Edgerton, Germeshausen and Grier, Inc., Boston, Massachusetts; Secret Formerly Restricted Data.

70. Meteorological Report on Operation Redwing; Part I, "Meteorological Data," Volumes 1, 2, and 11 and Part II, "Meteorological Analyses," Volumes 1, 2, and 3; Joint Task Force 7; JTFMC TP-1, 1956; Unclassified.

71. D. F. Rex; "Vertical Atmospheric Motions in the Equatorial Central Pacific"; Joint Task Force 7 Meteorological Center, Pearl Harbor, T. H.; Unclassified.

72. J. C. Kurtyka; "Precipitation Measurements Study"; State of Illinois Water Survey Division, Report of Investigation No. 20, 1953.

73. L. E. Egeberg and T. H. Shirasawa; "Standard Platform Sampling Bias Studies, Part I, Preliminary Studies of Airflow"; USNRDL-TM-70, 25 February 1957; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.

74. H. K. Chan; "Analysis of Standard Platform Wind Bias to Fallout Collection at Operation Redwing"; USNRDL-TR-363, September 1959; U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.

75. W. W. Perkins and G. Pence; "Standard Platform Sampling Bias Studies, Part II, Rainfall Bias Studies"; USNRDL Technical Memorandum (in publication); U. S. Naval Radiological Defense Laboratory, San Francisco 24, California; Unclassified.

76. P. Brown and others; "Gamma Exposure versus Distance"; Project 2.1, Operation Redwing, WT-1310, 20 February 1960; U. S. Army Signal Engineering Laboratories, Fort Monmouth, New Jersey; Secret Restricted Data.

Appendix A

INSTRUMENTATION

A.1 COLLECTOR IDENTIFICATION

Collector designations are shown in Figure A.1.

A.2 DETECTOR DATA

A.2.1 End-Window Counter.

Crystal dimensions and type: 1½-inch diameter × ½ inch thick, NaI(Tl), Harshaw

Photomultiplier tube type: 6292 DuMont

Scaler types: Model 162 Nuclear Instrument Corporation, and Model 182 Nuclear-Chicago (in tandem)

Pb shield dimensions: 8½-inch outside diameter × 20 inches high × 1½ inches thick; additional 2-inch thickness in Site Elmer laboratory

Counting chamber dimensions: 5½-inch diameter × 4 inches high

Al absorber thickness: ¼ inch

Shelf distances from bottom of absorber:

Shelf	Distance cm
1	1.0
2	2.6
3	4.2
4	5.8
5	7.4

Ratios to Shelf 5 (most commonly used) for centered Cs¹³⁷ point source:

Shelf	Ratio
1	5.87
2	3.02
3	1.88
4	1.31
5	1.00

Minimum count rate requiring coincidence loss correction: 1.0×10^6 counts/min

Counting procedure: ordinarily 3- to 1-minute intervals for each sample

A.2.2 Beta Counter.

Gas proportions: 90 percent A, 10 percent CO₂

Pb shield dimensions: 8½-inch outside diameter × 12 inches high × 1½ inches thick; additional 2-inch thickness in Site Elmer laboratory

Counting chamber dimensions: 5½-inch diameter × 4 inches high

Al window thickness: 0.92 mg/cm²

Shelf geometries from bottom of window:

Shelf	Distance cm	Physical Geometry Correction
1	0.85	0.2628
2	1.50	0.1559
3	2.15	0.0958
4	3.75	0.0363
5	5.35	0.0177

Minimum count rate requiring coincidence loss correction: 3.0×10^5 counts/min

A.2.3 4-π Ionization Chamber (Analytical and Standards Branch). (Two newer chambers of modified design were also used. The response of these to 100 μg of Ra ≈ 700×10^{-9} ma at 600 psi; therefore, all readings were normalized to the latter value. Use of precision resistors (1 percent) eliminated scale correction factors.)

Gas type and pressure: A ~ 600 psi

Shield dimensions: Pb ~ 19-inch outside diameter × 22 inches high × 4 inches thick; additional 1-foot thickness of sandbags in Site Elmer laboratory

Counting chamber dimensions: 11-inch diameter × 14 inches high

Thimble dimensions: 1¾-inch inside diameter × 12 inches deep

Useful range: ~ 217×10^{-11} ma (background) to 200×10^{-8} ma

Correction factors to equivalent 10⁹ scale:

Scale ~ ohms	Factor
10 ¹¹	0.936
10 ¹⁰	0.963
10 ⁹	1.000
10 ⁸	1.000

Response versus sample (Ra) position:

Distance from Bottom of Tube in	Relative Response pct
0 to 3	100
3.5 to 5.5	99 to 92

Response to 100 μg Ra: 5.58×10^{-9} ma at ~ 600 psi

Efficiency factors relative to Co⁶⁰ for various nuclides:

Nuclide	Factor
Ce ¹⁴¹	0.186
Hg ²⁰³	0.282
Au ¹⁹⁸	0.355
Cs ¹³⁷	0.623
Sc ⁴⁶	0.884
Co ⁶⁰	1.000
K ⁴²	1.205
Na ²⁴	1.312

A.2.4 Well Counter.

Nuclear-Chicago Model DS-3

Crystal dimensions and type: 1³/₄-inch diameter x 2 inches thick, NaI(Tl)

Well dimensions: 3/₄-inch diameter x 1¹/₂ inches deep

Photomultiplier tube type: 6292 DuMont

Scaler type: Model MPC-1 Berkeley, or Nuclear Instrument Corporation 162 with Nuclear-Chicago 182 in tandem

Pb shield thickness: 1¹/₂ inches, with 3/₄-inch diameter hole above crystal well; additional 2-inch thickness in YAG 40 laboratory

Counting rate versus sample volume in test tube (15 x 125 mm):

Sample Volume ml	Relative Count Rate pct
0.01	100
1.81	99.2
3.9 (~ well depth)	90.6

Efficiency for several nuclides:

Nuclide	Efficiency counts/dis
Au ¹⁹⁸	0.42
Co ⁶⁰	0.43
I ¹³¹	0.51

Minimum count rate requiring coincidence loss correction: 1.0 x 10⁴ counts/min

Counting procedure: minimum of 10⁴ counts to maintain a statistical error of ~1.0 percent

A.2.5 20-Channel Analyzer.

Crystal dimensions and type: 2-inch diameter x 2 inches thick, NaI(Tl)

Glow transfer tube types: GC-10B and GC-10D

Fast register type: Sodeco

Voltage gain (with delay line pulse shaping): 1,000

Attenuation (with ladder attenuator): 63 decibels in 1-decibel steps

Pb shield thickness: ~2 inches

Counting chamber dimensions: 8-inch diameter x 3¹/₂ inches high

Shelf distances from bottom of detector:

Shelf	Distances cm
1	2.07
2	4.76
3	5.25
4	6.84

Tray distance from bottom of detector when outside of 1/2-inch diameter collimator: 13.95 cm

Calibration standards: Ba¹³³, Ce¹⁴¹, Hg²⁰³, Na²², and Cs¹³⁷

Calibration procedure: one per day and one following each adjustment of amplifier or detector voltage

Counting procedure: equal counting times for each series on a given sample

A.2.6 Doghouse Counter (Reference 43)

Crystal dimensions and type: 1-inch diameter x 1 inch thick, NaI(Tl), Harshaw aluminum absorber 1/₄-inch thick

Photomultiplier tube type: 6292 DuMont

Scaler type: Model 162 Nuclear Instrument Corporation, and Model 182 Nuclear-Chicago (in tandem)

Pb shield dimensions (detector): 10-inch diameter x 20 inches high x 1¹/₂ inches thick

Pb shield thickness (counting chamber): 2 inches
Counting chamber dimensions: 20 x 24 x 34 inches high

Size of hole in roof of counting chamber for detector: 7-inch diameter

Distance from bottom of sample tray to bottom of crystal: 36 inches

Sample tray dimensions: 18 x 21 x 2 inches deep

Counting efficiency for several point-source nuclides, centered in bottom of tray with 1/₄-inch aluminum cover in place:

Nuclide	counts/dis x 10 ⁻⁴
Na ²²	1.70
Na ²⁴	0.936
K ⁴²	0.151
Sc ⁴⁶	1.16
Co ⁶⁰	1.02
Nb ⁹⁵	0.506
Cs ¹³⁷ -Ba ^{137m}	0.548
Ce ¹⁴¹	0.622
Au ¹⁹⁸	0.711
Hg ²⁰³	0.842

Relative counter photon efficiency, computed for total aluminum thickness = 1/2 inch (3.43 gm/cm²):

Energy MeV	Efficiency pct
0.01	0
0.02	0.0034
0.03	3.24
0.05	33.3
0.07	48.7
0.10	57.8
0.15	63.7

0.20	61.5
0.30	54.0
0.50	43.3
0.70	37.5
1.00	33.4
1.50	29.5
2.00	27.1
3.00	25.3
4.00	24.4

Minimum count rate requiring coincidence loss correction: 1.0×10^6 counts/min

Counting procedure: ordinarily 3- to 1-minute intervals for each sample; trays decontaminated and counted with $\frac{1}{4}$ -inch aluminum cover in place

A.2.7 Dip Counter.

Crystal dimensions and type: $1\frac{1}{2}$ -inch diameter \times 1 inch thick, NaI(Tl)

Photomultiplier tube type: 6292 DuMont

Scaler type: Same as doghouse counter

Shield thickness and counting chamber dimensions: Same as doghouse counter

Sample volume: 2,000 ml (constant geometry)

Counting efficiency for several nuclides: (Private communication from J. O'Connor, NRDL)

Nuclide	counts/dis $\times 10^{-2}$
Ce ¹⁴¹	1.20
Hg ²⁰³	1.72
Au ¹⁹⁸	1.28
Cs ¹³⁷	0.916
Nb ⁹⁵	0.870
Sc ⁴⁶	1.76
Co ⁶⁰	1.56
Na ²⁴	1.29

Minimum count rate requiring coincidence loss correction: 2×10^6 counts/min

Counting procedure: 2,000-ml samples at constant geometry; counting intervals selected to maintain a statistical error < 1.0 percent

A.2.8 Single-Channel Analyzer (Nuclear Radiation Branch) (Reference 57)

Crystal dimensions and type: 4-inch diameter \times 4 inches thick, NaI(Tl)

Photomultiplier tube type: 6364 DuMont

Pulse-height analyzer type: Model 510-SC Atomic

Instruments

Pb shield thickness: $2\frac{1}{2}$ inches

Collimator dimensions: $\frac{1}{2}$ -inch diameter \times 6 inches long

Sample container type and size: glass vial, $\frac{1}{2}$ -inch diameter \times $2\frac{1}{2}$ inches long

Distance from bottom of sample to collimator opening: 2 inches

Calibration standards: Na²², and Hg²⁰³

A.2.9 Gamma Time-Intensity Recorder. The energy and directional response characteristics of the standard TIR detector, consisting of four ion chambers (A, Am, Bm, and Cm) with a protective dome, were determined at NRDL. (Measurements and calculations were carried out by G. Hitchcock, T. Shirasawa, and R. Caputi.)

A special jig permitted both horizontal and vertical rotation about the center of the chamber under study. Directional response was measured and recorded continuously for 360 degrees in planes at 30-degree increments through the longitudinal axis of the Cm chamber. Relative response data was obtained by effectively exposing the chamber to a constant ionization rate at six different energies — four X-ray energies: 35 kev, 70 kev, 120 kev and 180 kev; and two source energies: Cs¹³⁷ (0.663 Mev) and Co⁶⁰ (1.2 Mev).

The results for three mutually perpendicular planar responses have been illustrated graphically to show: (1) shadowing interference by other chambers in the horizontal plane (Figure A.2), (2) maximum shadowing interference by other chambers in the vertical plane (Figure A.3), and (3) minimum shadowing interference by other chambers in the vertical plane (Figure A.4).

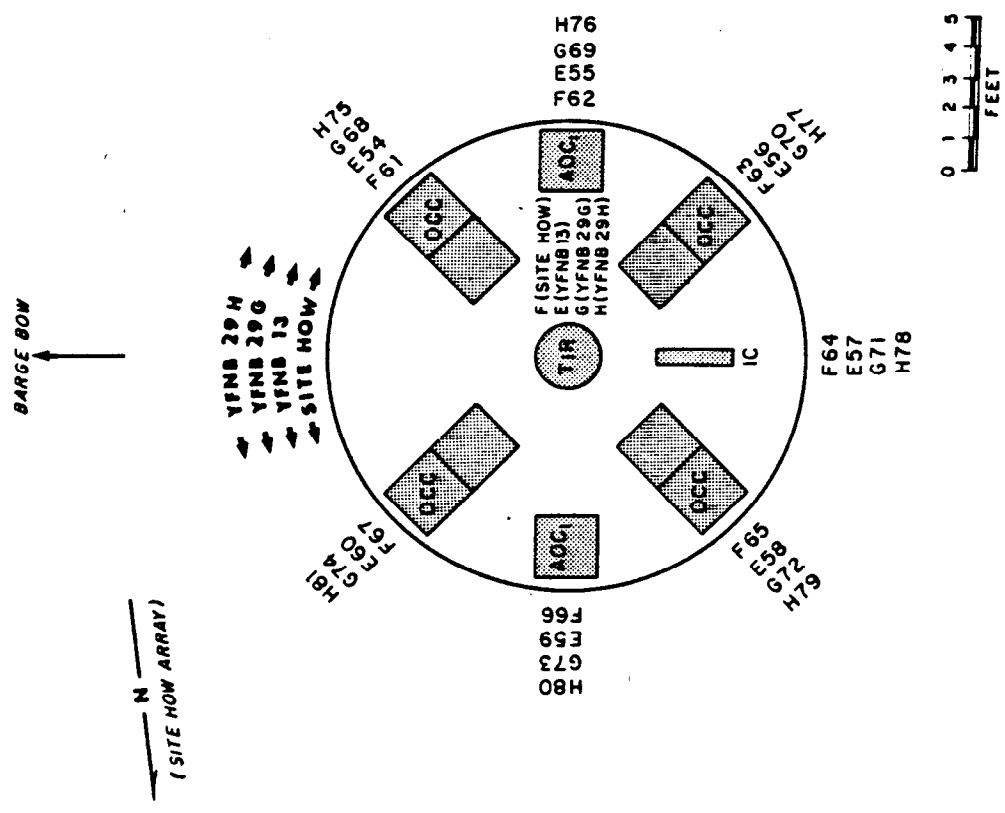
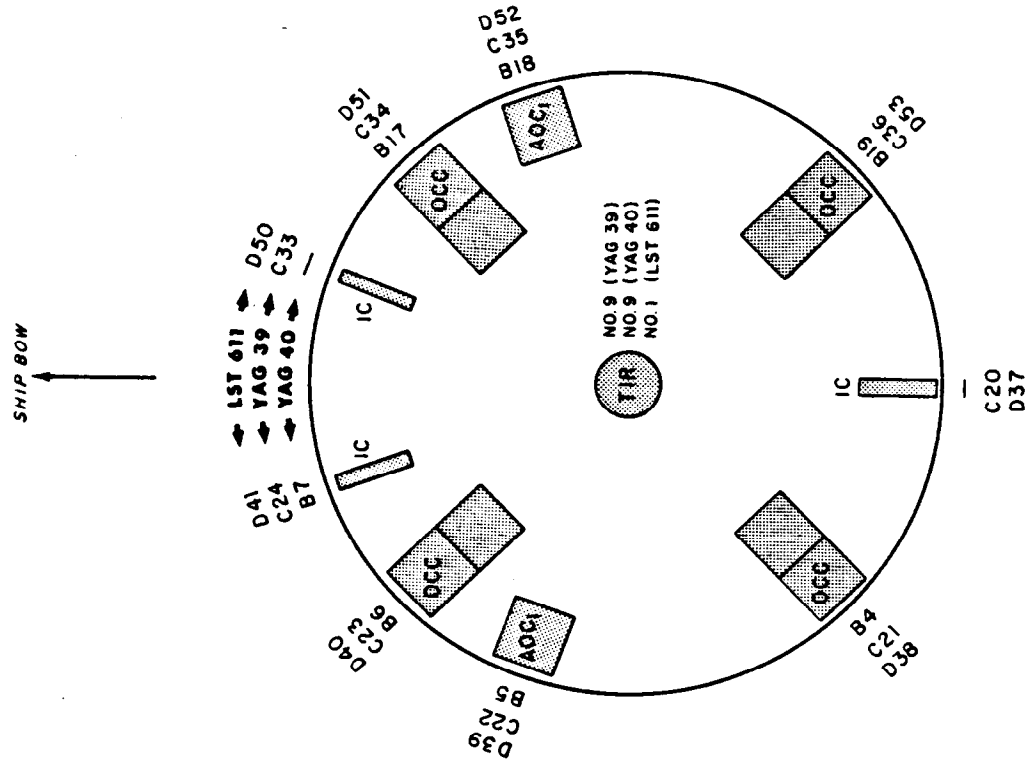


Figure A.1 Collector designations.

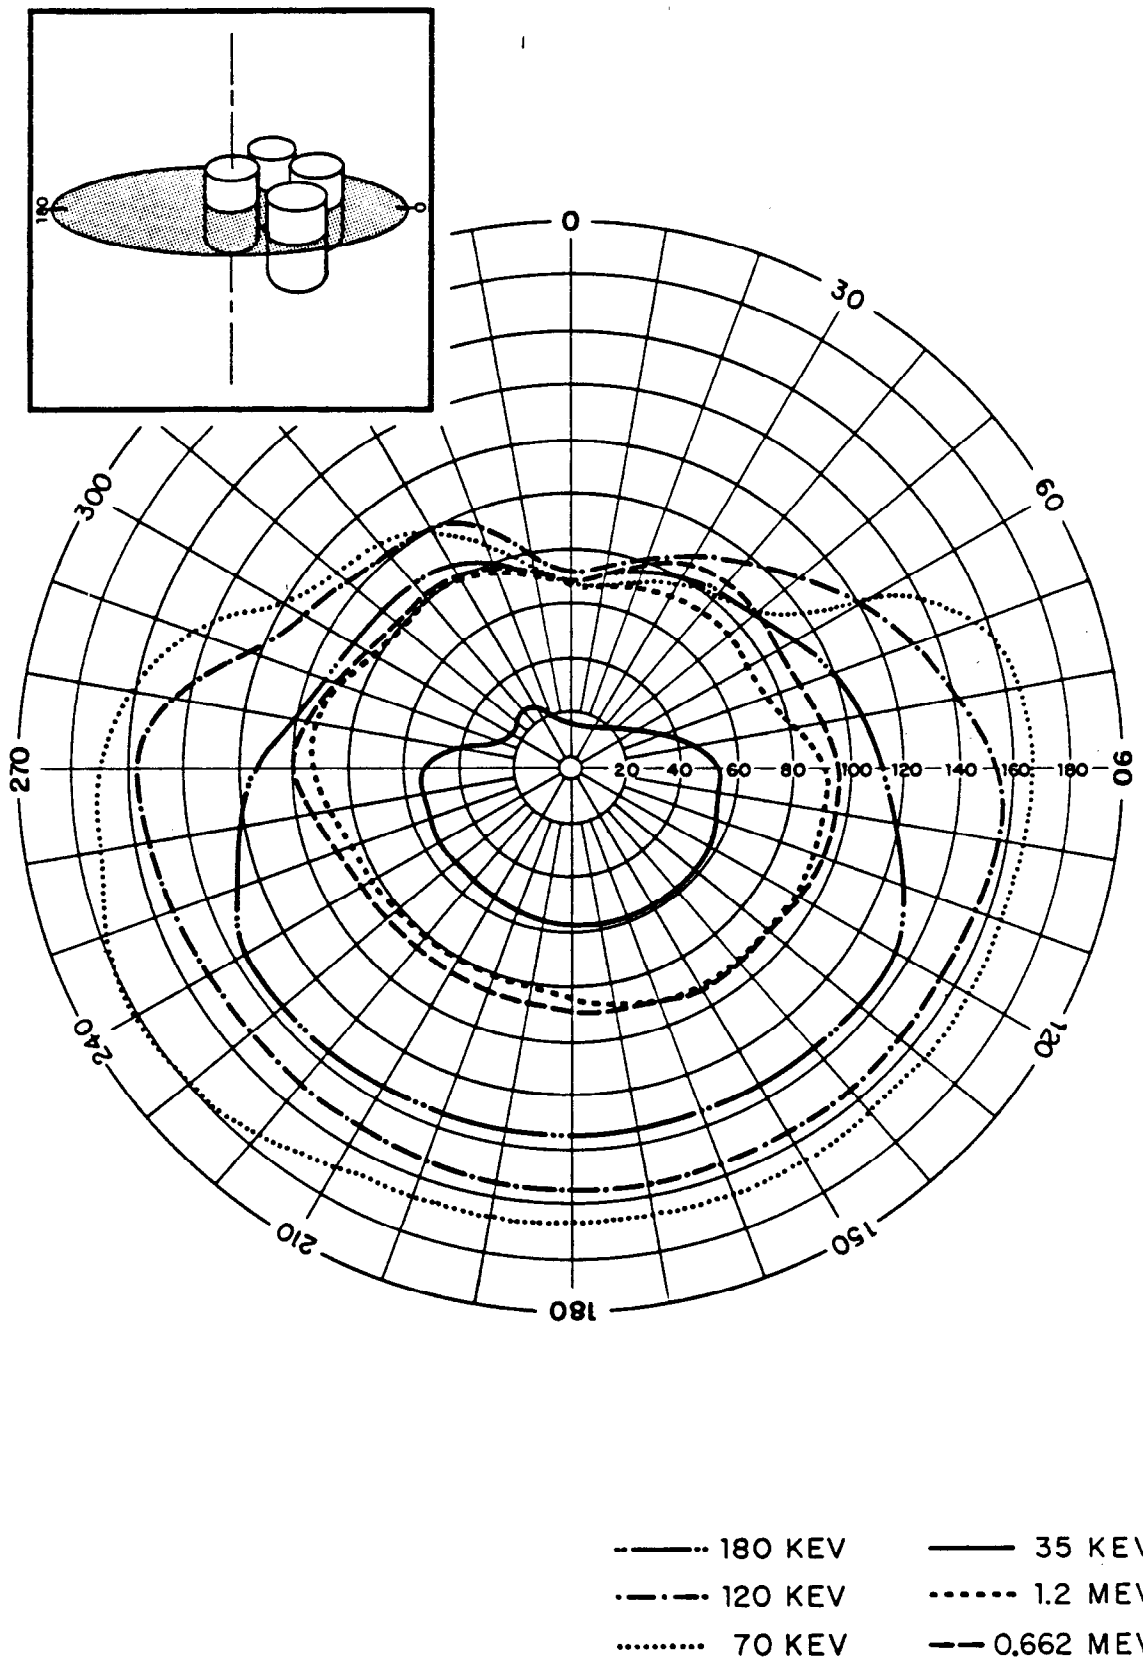


Figure A.2 Shadowing interference in horizontal plane for TIR.

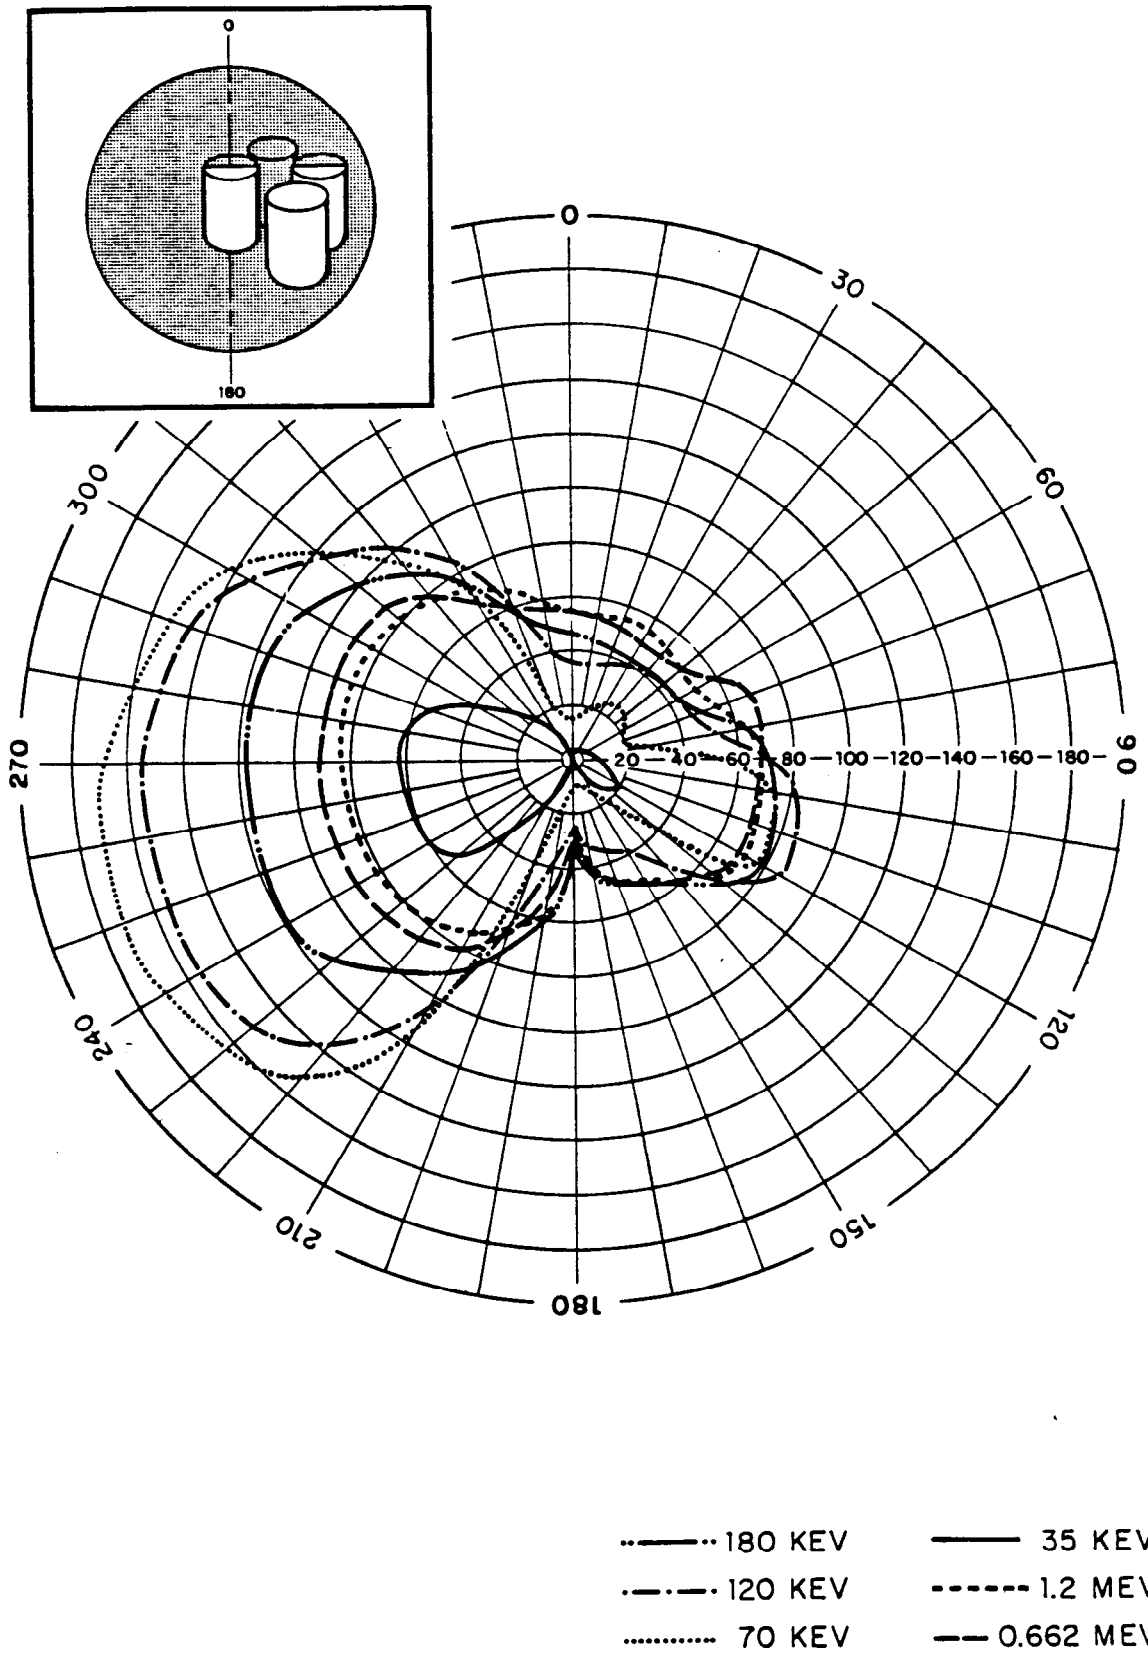


Figure A.3 Maximum shadowing interference in vertical plane for TIR.

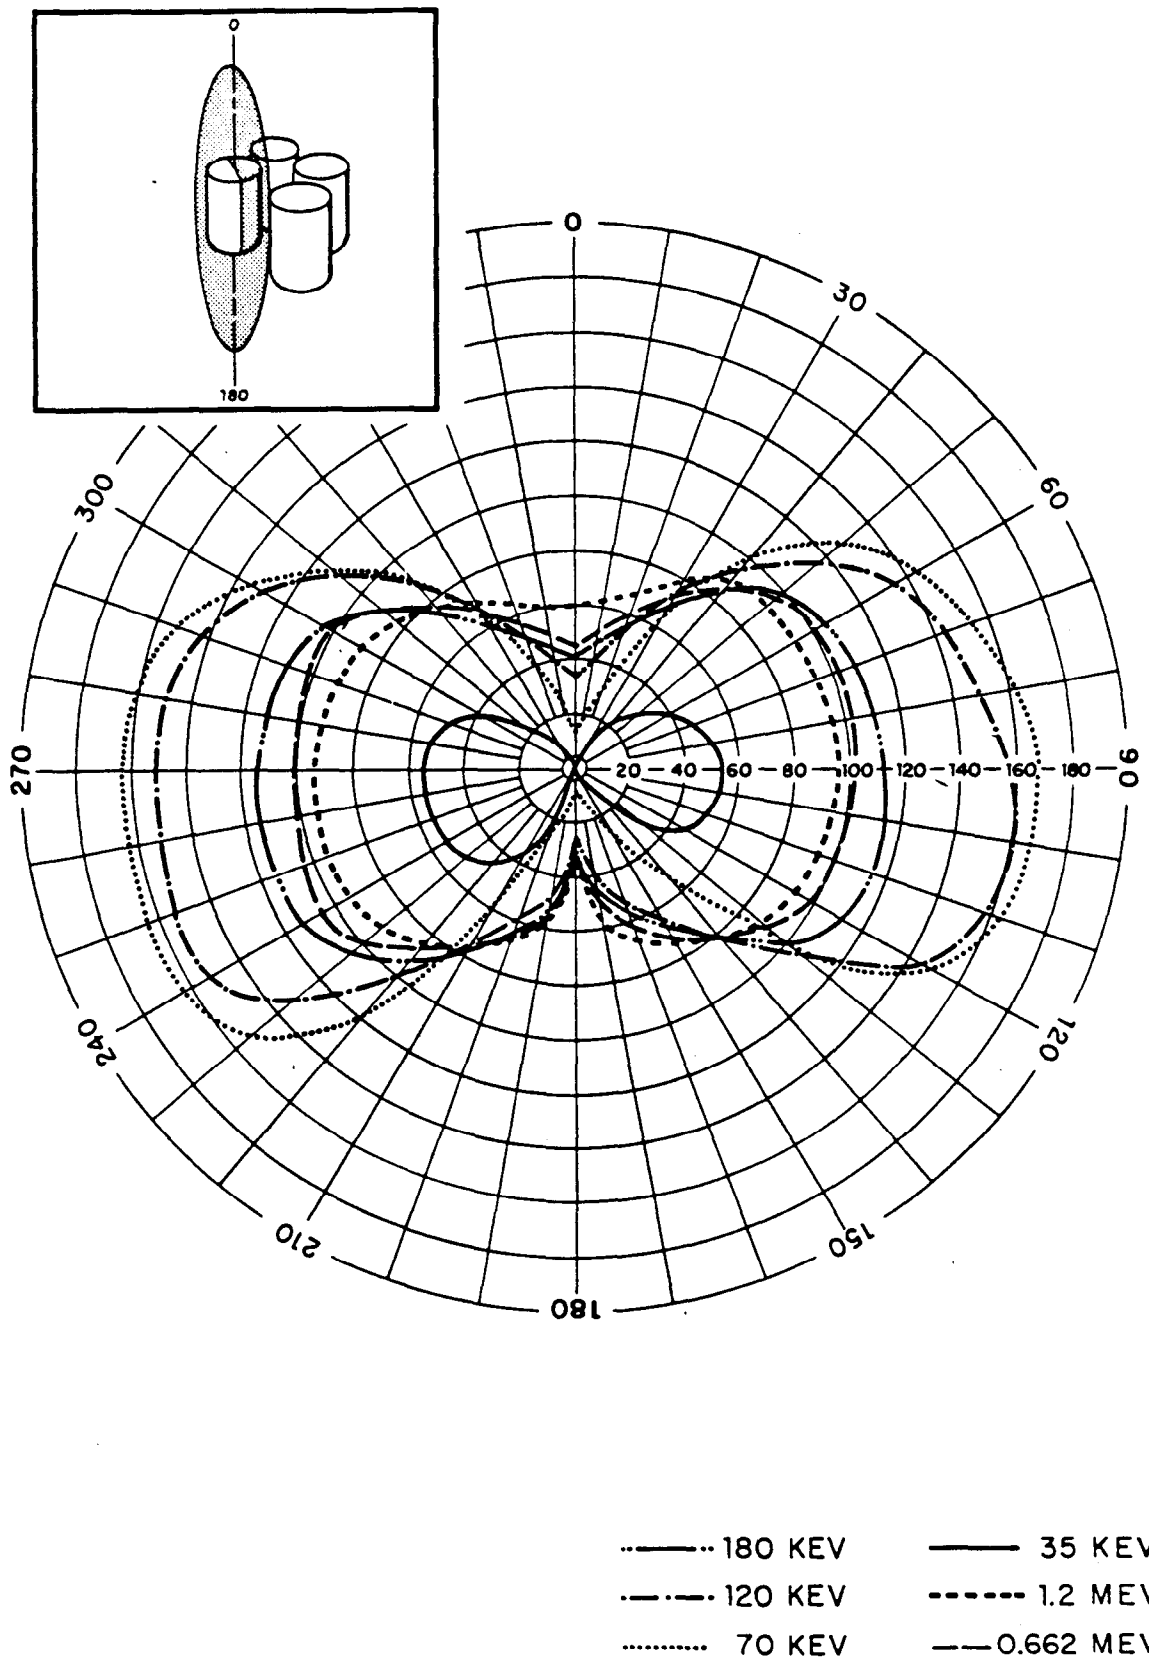


Figure A.4 Minimum shadowing interference in vertical plane for TIR.

Appendix B
MEASUREMENTS

B.1 BUILDUP DATA

TABLE B.1 CONTINUED

Station and Shot		Station and Shot		Station and Shot		Station and Shot	
YFNB 29-G ZU		YAG 40, No. 13 (Deck) FL		YAG 39-C, No. 9 FL		YAG 39, No. 13 (Deck) FL	
H+min	r/hr	H+hr	mr/hr	H+hr	mr/hr	H+hr	mr/hr
10	0.0005	6.00	0	10.1	32.3	42.0	33.7
20	0.03	8.00	1.93	10.5	35.5	47.0	28.2
26	0.26	8.57	8.18	11.0	33.4	48.0	21.8
27	0.54	9.00	17.4	11.6	37.2	54.0	15.4
28	0.83	9.57	38.0	12.1	36.0	66.0	10.8
29	0.99	10.0	61.9	12.6	34.6	75.0	9.27
31	1.32	11.0	142	13.1	33.4	76.0	6.30
33	3.10	12.0	225	13.6	32.3	80.0	6.04
35	4.0	13.0	248	14.1	31.0		
36	4.94	14.0	237	15.1	29.2	LST 611-D, No. 1 FL	
43	9.21	15.0	237	16.0	27.3	H+hr	mr/hr
49	9.64	16.0	248	17.0	26.1	6.57	0.14
94	7.05	17.0	259	18.0	24.9	7.32	0.67
124	5.64	18.0	248	19.0	23.7	7.57	2.2
139	4.7	19.0	237	20.0	22.5	7.90	15.3
184	3.06	20.0	231	21.0	21.3	8.40	32
274	2.12	21.0	225	22.0	19.4	8.73	57
424	1.36	22.0	214	23.0	19.4	8.90	76
484	0.99	23.0	197	24.0	17.7	9.07	99
544	0.80	24.0	180	26.0	16.3	9.23	88
574	0.78	30.0	145	28.0	14.6	9.40	83
649	0.70	35.0	125	30.0	13.4	9.57	80
799	0.55	40.0	109	32.0	12.4	10.1	78
1,624	0.31	45.0	88.4	34.0	11.6	10.9	71
2,524	0.19	50.0	56.8	36.0	11.0	12.1	65
3,424	0.15	55.0	52.3	38.0	10.4	13.1	60
		58.0	46.6	40.0	9.80	14.1	55
YAG 40-B, No. 9 FL		63.0	44.4	45.0	8.71	15.6	48
H+hr	mr/hr	70.0	39.9	50.0	6.55	17.6	44
6.00	0.050	75.0	37.6	55.0	5.77	19.6	38
8.00	0.550	79.0	22.1	60.0	5.04	21.6	35
9.00	5.10	YAG 39-C, No. 9 FL		64.9	4.68	23.6	32
10.0	17.4	H+hr	mr/hr	70.1	4.33	YFNB 13-E FL	
11.0	48.0	4.12	0.061	75.0	4.15	H+min	r/hr
12.0	71.1	4.37	0.417	80.0	3.50	21	0.0016
15.0	71.1	4.53	0.646	YAG 39, No. 13 (Deck) FL		24	0.0054
16.0	81.5	4.78	1.01	H+hr	mr/hr	26	0.0048
17.0	81.5	4.95	1.88	4.62	3.34	30	0.030
18.0	81.5	5.10	3.30	5.23	21.8	32	0.56
19.0	71.1	5.38	6.19	5.57	42.9	35	2.26
20.0	71.1	5.68	8.23	6.57	45.6	37	6.82
21.0	69.7	6.05	10.7	7.07	78.4	77	21.8
22.0	59.4	6.27	12.3	7.57	87.8	137	11.5
23.0	58.2	6.52	15.4	8.57	121	257	5.5
25.0	53.0	6.72	19.4	9.00	121	377	2.5
30.0	39.0	7.02	21.9	10.0	121	437	1.9
35.0	35.2	7.28	21.9	11.0	141	497	1.6
40.0	30.0	7.50	23.7	12.0	131	557	1.5
45.0	27.6	7.75	26.1	13.0	121	617	1.2
50.0	16.2	8.02	28.6	15.0	102	617	1.4
55.0	14.9	8.28	29.9	18.0	83.0		
58.0	13.7	8.57	29.9	22.0	69.0		
63.0	12.4	8.77	32.3	26.0	55.0		
70.0	11.1	9.19	32.9	30.0	46.5		
75.0	10.4	9.60	31.7	36.0	39.2		
79.0	9.20						

TABLE B.1 CONTINUED

Station and Shot		Station and Shot		Station and Shot		Station and Shot	
YAG 39-C, No. 9 NA		YAG 39, No. 13 (Deck) NA		LST 611-D, No. 1 NA		How F NA	
H+hr	mr/hr	H+hr	mr/hr	H+hr	r/hr	H+min	r/hr
15.2	149	6.57	1,130	2.2	0.00042	6	0.0010
16.0	80.0	6.82	900	2.4	0.00045	33	0.0011
17.0	60.7	7.00	773	2.7	0.00051	45	0.0019
18.0	58.1	7.32	728	2.9	0.00087	48	0.0056
19.0	56.9	7.57	671	3.1	0.0015	53	0.048
20.0	53.1	7.82	624	3.2	0.0029	54	0.069
21.0	45.8	8.32	603	3.4	0.0044	55	0.083
22.0	36.1	8.82	557	3.7	0.0085	59	0.11
23.0	34.7	9.32	502	3.8	0.013	66	0.145
24.0	32.4	9.82	468	4.0	0.015	76	0.137
26.0	29.9	10.3	434	4.1	0.017	93	0.13
27.0	25.0	10.8	412	4.4	0.010	100	0.135
28.0	22.6	11.6	378	4.6	0.008	110	0.14
30.0	22.0	12.0	344	4.7	0.011	120	0.148
32.0	21.4	12.6	332	4.80	0.0109	125	0.146
34.0	19.6	13.0	305	4.9	0.012	134	0.148
36.0	18.4	13.6	288	4.97	0.012	140	0.150
38.0	17.8	14.1	277	5.07	0.016		Malfunction
40.0	17.2	14.6	266	5.6	0.042		YFNB 29-H, NA
42.0	16.0	15.0	243	6.1	0.043	H+min	r/hr
44.0	15.3	15.6	221	7.1	0.034		
46.0	14.6	15.7	132	10.1	0.020	11	0.0011
48.0	13.9	16.0	110	14.1	0.012	40	0.0012
50.0	13.2	16.6	108	16.1	0.0081	45	0.0026
55.0	11.7	17.0	106	18.1	0.0067	47	0.0091
59.0	10.6	18.0	98.7	24.1	0.0044	50	0.033
60.0	11.7	19.0	92.1	27.0	0.0039	51	0.062
64.0	10.1	20.0	88.9			52	0.075
70.1	9.15	21.0	76.7		YFNB 13-E NA	53	0.079
73.9	8.43	22.0	69.1	H+min	r/hr	54	0.083
		23.0	65.8	10	0.0047	60	0.084
		24.0	63.8	18	0.037	72	0.10
		25.0	61.3	27	0.60	80	0.116
		26.0	59.1	29	4.04	104	0.108
		27.0	53.6	38	8.5	180	0.087
		28.0	51.4	46	7.0	205	0.080
		30.0	48.1	58	4.6	255	0.066
		32.0	44.8	72	3.4	330	0.047
		34.0	42.8	91	2.75	400	0.035
		36.0	41.0	118	2.3	420	0.030
		38.0	39.3	121	2.1	480	0.026
		40.0	37.5	136	1.8	610	0.018
		42.0	35.8	219	1.0	780	0.013
		44.0	34.5	301	0.67	920	0.011
		47.0	31.8	406	0.41	1,000	0.0078
		50.0	29.1	631	0.20	1,005	0.0054
		53.0	25.4	1,006	0.08	1,150	0.0050
		56.0	23.6	1,066	0.059	1,250	0.0040
		59.0	23.6	1,306	0.042	1,300	0.0034
		64.0	21.8	1,546	0.036	1,600	0.0028
		66.0	20.8	1,666	0.033	1,900	0.0023
		74.0	18.1	1,786	0.031	2,400	0.0020
				1,906	0.046	2,700	0.0014
				2,026	0.056		
				2,146	0.056		
				2,266	0.041		
				2,626	0.032		
				3,106	0.02		
				3,466	0.015		

TABLE B.1 CONTINUED

Station and Shot		Station and Shot		Station and Shot		Station and Shot	
YAG 40-B, No. 9 TE		YAG 40-B, No. 9 TE		YAG 40, No. 13 (Deck) TE		YAG 39-C, No. 9 TE	
H+hr	r/hr	H+hr	r/hr	H+hr	r/hr	H+hr	r/hr
4.35	0.0017	44.2	0.262	24.0	2.74	3.32	1.70
4.60	0.0057	46.2	0.207	25.0	2.64	3.37	1.88
4.73	0.0134	48.2	0.193	26.0	2.52	3.42	2.05
4.95	0.127	50.2	0.191	26.6	2.08	3.45	2.05
5.20	0.598	52.2	0.179	27.0	1.47	3.50	2.33
5.43	1.08	54.2	0.173	28.0	1.42	3.53	2.51
5.58	1.33	56.2	0.167	29.0	1.42	3.57	2.51
5.88	1.76	58.2	0.159	30.0	1.36	3.62	2.89
6.10	1.86	60.2	0.152	31.0	1.35	3.63	2.69
6.38	1.90	62.2	0.139	32.0	1.30	3.67	3.05
6.62	1.98	64.2	0.133	33.0	1.25	3.70	3.14
6.85	2.13	66.2	0.129	34.0	1.22	3.73	3.14
7.10	2.23	68.2	0.127	35.0	1.19	3.85	3.59
7.28	2.24	70.2	0.126	36.0	1.14	3.93	4.96
7.70	2.21	72.2	0.118	37.0	1.08	3.95	5.43
8.23	2.03	75.2	0.113	38.0	0.730	4.00	5.89
8.75	1.94			39.0	0.660	4.03	6.34
9.25	2.09	YAG 40, No. 13 (Deck) TE		40.0	0.588	4.10	6.72
9.75	1.89	H+hr	r/hr	41.0	0.572	4.13	7.28
10.3	1.85	4.48	0.0040	42.0	0.566	4.15	7.55
10.8	1.79	4.62	0.0097	43.0	0.512	4.20	7.55
11.2	1.80	4.75	0.0252	44.0	0.478	4.22	8.20
11.7	1.56	4.90	0.111	45.0	0.470	4.25	8.87
12.2	1.60	4.97	0.233	46.0	0.260	4.28	8.20
12.8	1.57	5.07	0.793	48.0	0.243	4.30	8.67
13.2	1.48	5.15	1.20	50.0	0.215	4.31	9.15
13.8	1.40	5.32	2.41	52.0	0.203	4.32	8.67
14.2	1.35	5.48	3.52	54.0	0.172	4.35	9.15
14.7	1.32	5.73	5.08	55.0	0.181	4.42	10.1
15.2	1.25	6.00	6.31	57.0	0.172	4.47	11.0
15.8	1.21	6.23	6.76	59.0	0.154	4.52	11.0
16.2	1.15	6.73	7.22	61.0	0.154	4.58	11.5
16.7	1.13	7.00	7.22	63.0	0.152	4.62	11.0
17.2	1.09	7.23	7.43	65.0	0.140	4.73	9.15
17.8	1.05	7.73	6.65	68.0	0.132	5.07	8.20
18.2	1.01	8.00	6.19	72.0	0.123	5.15	8.20
19.2	0.992	8.23	5.97	75.0	0.115	5.23	7.55
20.2	0.927	8.57	5.97			6.15	5.43
21.2	0.881	9.00	6.54	YAG 39-C, No. 9 TE		7.15	4.52
22.2	0.832	9.23	6.65	H+hr	r/hr	8.15	4.06
23.2	0.784	10.0	6.65	2.00	0.0017	9.15	3.59
24.2	0.770	11.0	6.65	2.20	0.0175	10.2	2.96
25.2	0.702	11.6	6.65	2.23	0.0308	11.2	2.70
26.2	0.670	12.0	6.54	2.28	0.0467	12.2	2.33
27.3	0.608	13.0	5.64	2.30	0.0591	13.2	2.15
28.2	0.596	14.0	5.42	2.33	0.0714	14.2	1.88
29.3	0.576	15.0	4.29	2.35	0.0837	15.2	1.70
30.2	0.568	16.0	3.97	2.37	0.109	16.2	1.52
31.2	0.554	17.0	3.84	2.70	0.514	17.2	1.30
32.2	0.527	18.0	3.52	2.85	0.728	18.1	1.13
33.4	0.439	19.0	3.29	2.97	0.906	19.2	1.07
34.1	0.432	20.0	3.18	3.05	1.08	20.2	0.995
35.3	0.415	21.0	3.08	3.13	1.29	21.1	0.942
36.1	0.403	22.0	2.96	3.20	1.41	22.1	0.888
38.4	0.339	23.0	2.86	3.27	1.60	24.2	0.763
40.4	0.307					26.2	0.594
42.2	0.292					28.2	0.505

TABLE B.1 CONTINUED

Station and Shot		Station and Shot		Station and Shot		Station and Shot	
YAG 39-C, No. 9 TE		YAG 39, No. 13 (Deck) TE		LST 611-D, No. 1 TE		How F TE	
H+hr	r/hr	H+hr	r/hr	H+hr	r/hr	H+min	r/hr
30.1	0.465	20.0	3.88	10.73	0.24	101	0.0069
32.2	0.461	21.0	3.61	10.98	0.18	107	0.016
34.2	0.412	22.0	3.52	11.23	0.182	109	0.024
36.2	0.381	23.0	3.52	11.73	0.187	112	0.032
38.3	0.376	24.0	3.07	12.23	0.198	113	0.036
40.1	0.310	25.0	2.98	12.35	0.205	115	0.041
42.2	0.292	26.0	2.90	12.98	0.224	116	0.044
44.0	0.290	27.0	2.36	13.56	0.256	117	0.051
48.0	0.243	28.0	2.28	14.23	0.247	118	0.060
50.1	0.238	29.1	2.19	14.85	0.236	119	0.064
53.2	0.215	30.1	2.10	15.48	0.215	128	0.101
56.2	0.192	31.0	2.10	21.11	0.146	142	0.15
60.1	0.171	32.1	1.92	24.23	0.112	149	0.19
63.9	0.158	33.1	1.84	31.73	0.085	152	0.20
66.2	0.151	34.0	1.75	34.48	0.066	173	0.22
70.5	0.139	35.0	1.49	38.48	0.054	195	0.21
72.4	0.136	36.0	1.44	40.48	0.051	221	0.19
74.4	0.131	37.1	1.36			251	0.173
78.4	0.123	38.1	1.37	YFNB 13-E TE		341	0.11
78.6	0.113	39.0	1.09	H+min	r/hr	401	0.092
79.4	0.113	40.0	1.04	18	0.0056	599	0.061
		41.0	1.00	26	0.013	749	0.051
		42.0	0.972	30	0.021	899	0.042
		42.9	0.955	32	0.022	1,289	0.029
		45.0	0.894	35	0.020	1,589	0.024
		47.2	0.886	36	0.025	1,889	0.021
		49.0	0.825	37	0.019		
		51.0	0.799	40	0.018	YFNB 29-H TE	
		53.0	0.772	43	0.020	H+min	r/hr
		55.0	0.711	46	0.022	1	0.00056
		57.0	0.659	50	0.030	3	0.00046
		59.0	0.642	61	0.090	14	0.0016
		61.0	0.616	71	0.20	16	0.015
		63.1	0.564	81	0.52	20	0.047
		64.9	0.555	91	1.11	22	0.30
		66.0	0.529	101	1.87	24	0.60
		67.0	0.516	111	2.13	25	0.80
		69.0	0.499	114	2.34	26	0.90
		71.0	0.485	116	2.5	28	2.0
		73.0	0.459	118	2.34	34	3.8
		75.0	0.451	123	2.21	38	7.4
		77.0	0.424	177	2.25	44	10.0
		79.0	0.376	204	1.9	49	13.2
		80.2	0.374	309	1.0	490	9.9
				429	0.7	670	7.1
		LST 611-D, No. 1 TE		909	0.30	730	6.9
		H+hr	r/hr	1,269	0.15	850	6.3
		7.18	0.002	1,500	0.12	920	5.9
		7.23	0.0033	2,109	0.076	970	5.3
		7.73	0.024	3,069	0.042	1,300	3.5
		8.23	0.019	3,309	0.016	2,000	1.9
		8.65	0.027	3,549	0.009	3,000	1.14
		8.95	0.048	3,789	0.0085	3,200	0.72
		9.28	0.082	4,029	0.0081		
		9.51	0.10	4,509	0.0072		
		9.78	0.12				
		10.0	0.12				
		10.28	0.13				
		10.48	0.17				

TABLE B.2 INCREMENTAL COLLECTOR DATA

Tray Number	Exposure Began (Mike Time) 28 May 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
Designator: YAG 40-A-1 ZU					
Counting Time: Corrected to H+12 hours					
Nominal Exposure Interval: Variable					
337	0915	3.4		36,330	2,400
330	0930	3.7		307,800	30,800
331	0940	3.8		298,900	29,890
332	0950	4.1		1,392,000	69,600
333	1010	4.3		2,378,000	237,800
334	1020	4.5		2,149,000	214,900
335	1030	4.7		1,219,000	121,900
336	1040	4.8		1,808,000	180,800
324	1050	5.0		4,023,000	402,300
325	1100	5.2		4,741,000	474,000
326	1110	5.3		4,687,000	468,700
327, 328	1120	5.7		16,423,000	547,400
329	1150	6.0		5,140,000	514,000
318, 319	1200	6.3		12,628,000	451,000
320	1228	6.7		5,044,000	229,300
321, 322	1250	7.1		4,065,000	176,700
323	1313	7.4		291,900	36,480
308	1321	7.5		349,200	23,280
309	1336	7.8		541,300	36,090
310	1351	8.1		316,500	16,660
311	1410	8.4		701,500	35,070
312	1430	8.7		189,540	9,480
313	1450	9.1		320,000	16,000
314	1510	9.4		309,500	15,480
End of run	1530				
Designator: YAG 40-B-7 ZU					
Counting Time: H+55.1 to H+62.9 hours					
Nominal Exposure Interval: 15 minutes					
401	0918	3.5		233,400	15,560
402	0932.7	3.7		349,300	23,287
403	0947.4	4.0		368,500	24,567
404	1002.1	4.2		1,225,000	81,667
405	1017.1	4.5		2,089,000	139,267
406	1031.8	4.7		2,091,000	139,400
407	1047	5.0		2,626,000	175,067
408	1102	5.2		4,299,000	286,600
409	1117.4	5.5		4,146,000	276,400
410	1132.6	5.7		4,928,000	328,533
411	1147.8	6.0		3,916,000	261,067
412	1203	6.3		1,469,000	97,933
413	1218.2	6.5		908,600	60,573
414	1233.4	6.7		1,074,000	71,600
415	1248.6	7.0		1,001,000	66,733
416	1303.8	7.2		141,100	9,407
417	1319	7.5		110,200	7,347
418	1334.2	7.8		53,340	3,556
419	1349.4	8.0		26,830	1,789
420	1404.6	8.3		60,730	4,049

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 28 May 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
421	1419.8	8.5		84,300	5,620
422	1435.0	8.8		116,000	7,733
423	1450.2	9.0		148,600	9,907
424	1505.4	9.3		179,200	11,946
425	1520.6	9.5		114,300	7,620
426	1535.8	9.8		95,720	6,380
427	1551.0	10.1		113,900	7,593
428	1606.2	10.3		53,230	3,549
429	1621.4	10.6		63,720	4,248
430	1636.6	10.8		87,920	5,861
431	1651.8	11.0		57,860	3,857
432	1707	11.3		63,490	4,233
433	1722.2	11.6		42,370	2,825
434	1737.4	11.8		32,260	2,151
435	1752.6	12.1		32,390	2,159
436	1807.8	12.3		18,430	1,229
437	1823	12.6		14,260	951
438	1838.2	12.8		15,610	1,041
439	1853.4	13.1		15,790	1,053
440	1908.6	13.3		10,150	677
441	1923.8	13.6		20,150	1,343
442	1939	13.9		16,950	1,130
443	1954.2	14.1		17,210	1,147
444	2009.4	14.4		12,960	864
445	2024.6	14.6		12,150	810
446	2039.8	14.8		12,460	831
447	2055	15.1		12,280	819
448	2110.2	15.4		4,462	297
449	2125.4	15.6		10,600	707
450	2140.1	16.1		111,600	3,434
451	2212.6	—		719,900	47,993
End of run	End of fallout				

Designator: YAG 39-C-20 ZU

Counting Time: H+66 to H+70 hours

Nominal Exposure Interval: 15 minutes

229	1805	12.3		1,929	128
230	1820	12.5		1,690	112
231	1835	12.8		4,440	296
232	1850	13.0		1,474	98
233	1905	13.3		8,880	591
234	1920	13.5		2,540	169
235	1935	13.8		452	30
236	1950	14.0		1,093	73
237	2005	14.3		1,389	93
238	2020	14.5		2,412	161
239	2035	14.8		1,663	111
240	2050	15.0		3,552	236
241	2105	15.3		6,532	435
242	2120	15.5		12,860	859
243	2135	15.8		10,670	711
244	2150	16.0		6,076	405
245	2205	16.3		7,651	510
246	2220	16.7		14,880	425
247	2255	17.1		14,190	992
248	2309.3	19.0		131,900	570
249	0300	21.2		18,400	1,330
250	0314.2	21.4		9,236	615
251	0329.2	21.7		2,767	192
252	0344.2	21.9		2,647	177
253	0359.2	22.2		5,074	338
254	0414.2	22.4		8,143	541
255	0429.2	22.7		7,990	519

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 28 May 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
256	0444.2	22.9		6,497	433
257	0459.2	23.2		6,872	458
258	0514.2	23.4		6,776	452
259	0529.2	23.7		5,337	356
260	0544.2	23.9		8,816	588
261	0559.2	24.2		8,378	559
262	0614.2	24.4		4,577	303
263	0629.2	24.7		3,479	232
264	0644.2	24.9		4,396	292
265	0659.2	25.2		4,047	269
266	0714.2	25.4		4,546	303
267	0729.2	25.7		5,055	336
268	0744.2	25.9		4,137	276
269	0759.2	26.2		3,497	233
270	0814.2	26.4		3,400	226
271	0829.2	26.7		5,780	385
272	0844.2	26.9		4,195	279
273	0859.2	27.2		5,464	364
274	0914.2	27.4		3,076	205
275	0929.2	27.7		4,774	318
276	0944.2	27.9		4,608	307
277	0959.2	28.2		3,303	220
278	1014.2	28.4		149,800	9,970
279	1029.2	28.7		3,005	200
280	1044.2	28.9		2,610	176
281	1059.2	29.2		1,814	121
282	1114.2	29.4		3,230	216
283	1129.2	29.7		2,849	190
284	1144.2	29.9		3,372	225
End of run	1159.2				

Designator: YFNB 13-E-57 ZU

Counting Time: H+39.3 to H+42.8 hours

Nominal Exposure Interval: 15 minutes

1200	0556	0.1	6	521	35
1201	0611	0.4	24	752,200	501,040
1202	0626	0.6	36	2,726,000	181,733
1203	0641	0.9	54	5,819,000	387,933
1204	0656	1.1	66	7,034,000	468,933
1205	0711	1.4	84	3,870,000	258,000
1206	0726	1.6	96	2,752,000	183,467
1207	0741	1.9	114	1,248,000	83,200
1208	0756	2.1	126	445,900	29,727
1209	0811	2.4	144	173,700	10,247
1210	0826	2.6	156	157,300	10,486
1211	0841	2.9	174	39,860	2,657
1212	0856	3.1	186	7,098	473
1213	0911	3.4	204	28,790	1,919
1214	0926	3.6	216	19,318	1,288
1215	0941	3.9	234	6,211	414
1216	0956	4.1	246	5,363	358
1217	1011	4.4	264	4,474	298
1218	1026	4.6	276	3,699	247
1219	1041	4.9	294	1,267	84
1220	1056	5.1	306	1,113	74
1221	1111	5.4	324	1,034	69
1222	1126	5.6	336	1,629	109
1223	1141	5.9	354	2,148	145
1224	1156	6.1	366	8,504	567

TABLE B. 2 CONTINUED

Tray Number	Exposure Began (Mike Time) 28 May 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
1225	1211	6.4	384	800	53
1226	1226	6.6	396	850	57
1227	1241	6.9	414	1,036	69
1228	1256	7.1	426	536	36
1229	1311	7.4	444	1,249	83
1230	1326	7.6	456	586	39
1231	1341	7.9	474	5,734	382
1232	1356	8.1	486	21,079	1,405
1233	1411	8.4	504	12,420	828
1234	1426	8.6	516	568	38
1235	1441	8.9	534	1,818	121
1236	1456	9.1	546	12,490	833
1237	1511	9.4	564	—	—
1238	1526	9.6	576	1,066	71
1239	1541	9.9	594	684	46
1240	1556	10.1	606	480	32
1241	1611	10.4	624	126	8
1242	1626	10.6	636	404	27
1243	1641	10.9	654	574	38
1244	1656	11.1	666	820	55
1245	1711	11.4	684	613	41
1246	1726	11.6	696	1,164	78
1247	1741	11.9	714	—	—
1248	1756	12.1	726	Background	—
1249				Background	—
1250 to 1253				Background	—
1254	1941	13.8	828	Background	—

Designator: How F-64 ZU

Counting Time: H+20.2 to H+22.8 hours

Nominal Exposure Interval: 15 minutes

858	0556	0.1	6	19	1
859	0611	0.4	24	2,996	199
860	0626	0.6	36	2,082,000	138,800
861	0641	0.9	54	1,113,000	74,200
862	0656	1.1	66	710,200	46,747
863	0711	1.4	84	754,700	50,313
864	0726	1.6	96	907,800	60,520
865	0741	1.9	114	216,700	14,447
866	0756	2.1	126	74,300	4,953
867	0811	2.4	144	134,800	8,987
868	0826	2.6	156	50	3
869	0841	2.9	174	15	1
870	0856	3.1	186	46	3
871	0911	3.4	204	124	8
872	0926	3.6	216	15	1
873	0941	3.9	234	79	5
874	0956	4.1	246	64	4
875	1011	4.4	264	742	50
876	1026	4.6	276	47	3
877 to 899				Background	—
End of run	1641	10.7		Background	—

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 28 May 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
Designator: YFNB 29-G-71 ZU					
Counting Time: H + 29.6 to H + 35.4 hours					
Nominal Exposure Interval: 2 minutes					
1257	0558.2		3	274	137
1258	0600		5	1,059	530
1259	0602		7	34	17
1260	0603.8		9	-4	-2
1261	0605.6		10	-2	-1
1262	0607.3		12	-3	-2
1263	0609.2		14	85	42
1264	0611		16	38	19
1265	0612.8		18	47	24
1266	0615		20	43	22
1267	0617		22	39	20
1268	0618.8		23	44	22
1269	0621		26	203	102
1270	0622.7		28	212	206
1271	0624.6		30	375	172
1272	0626.4		31	97,120	48,560
1273	0628.4		33	7,320	3,660
1274	0630.3		35	768,900	384,450
1275	0632.1		37	289,100	144,500
1276	0634.1		39	1,569,000	784,500
1277	0636.2		41	58,000	29,000
1278	0638.3		43	35,200	17,600
1279	0640.5		46	1,321,000	660,500
1280	0642.7		48	670,700	335,350
1281	0644.8		50	337,700	168,850
1282	0646.8		52	138,000	69,000
1283	0648.7		54	1,666,000	833,000
1284	0650.8		56	451,600	225,800
1285	0652.8		58	382,200	191,100
1286	0654.3		59	1,534,000	767,000
1287	0656.5		62	2,581,000	1,290,500
1288	0658.8		64	1,466,000	733,000
1289	0700.8		66	377,900	188,950
1290	0702.9		68	1,499,000	749,500
1291	0705		70	1,089,000	544,500
1292	0707		72	1,635,000	817,500
1293	0709.1		74	1,048,000	524,000
1294	0711.2		76	321,700	160,850
1295	0713		78	623,000	311,500
1296	0715		80	1,386,000	693,000
1297	0716.7		82	531,600	265,800
1298	0718.5		83	711,400	355,700
1299	0720.7		85	610,200	305,100
1300	0722.4		87	1,032,000	516,000
1301	0724.5		90	429,700	214,850
1302	0726.7		92	1,159,000	579,500
1303	0728.8		94	334,600	167,300
1304	0730.8		96	725,000	362,500
1305	0733		98	416,900	208,450
1306	0735.1		100	172,400	86,200
1307	0737		102	270,400	135,200
1308	0739.1		104	188,300	94,150
1309	0741.2		106	239,100	119,550
1310	0743.3		108	360,300	180,150
1311	0745.5		110	1,032,000	516,000
End of run	0747.2				

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 12-13 June 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
Designator: YAG 40-A-1 FL					
Counting Time: Corrected to H+12 hours					
Nominal Exposure Interval: Variable					
3815	1145	5.9		434	5.8
2690	1300	7.1		405	6.8
3814	1400	7.8		15,453	515
2689	1430	8.3		393	13.1
3813	1500	8.8		15,370	512
2688	1530	9.3		22,130	738
3812	1600	9.8		76,380	2,546
2687	1630	10.3		24,670	822
3811	1700	10.8		114,400	3,813
2686	1730	11.3		52,230	1,741
3810	1800	11.8		45,700	1,523
2685	1830	12.3		4,495	150
3809	1900	13.1		192	3
2684	2000	13.8		175	6
3808	2030	14.3		22,170	739
2683	2100	14.8		13,470	449
3807	2130	15.3		55,500	1,850
2682	2200	15.8		79,590	2,653
3806	2230	16.3		29,380	979
2681	2300	16.8		75,600	2,520
3805	2330	17.3		11,530	384
2680	2400	17.8		15,950	532
3804	0030	18.3		23,920	797
2679	0100	18.8		84	3
3803	0130	19.3		18,520	617
2678	0200	19.8		64	2
3802	0230	20.3		89	3
2677	0300	20.8		6,609	220
3801	0330	21.3		27,860	929
2676	0400	21.8		9,400	313
3800	0430	22.3		202,000	6,733
2675	0500	22.8		16,070	537
3799	0530	23.3		73	2
2674	0600	23.8		147	5
3798	0630	24.3		29	1
2673	0700	24.8		196	6
3797	0730	25.3		126	4
2669	0800	25.8		356	11.9
3796	0830	26.2		275	13.7
2671	0850	26.7		3,801	95
End of run	0930	27.1			

Designator: YAG 40-B-7 FL

Counting Time: Corrected to H+12 hours

Nominal Exposure Interval: 15 minutes

12 June 56					
2638	1235	6.3		1,273	84.8
3764	1250	6.5		1,301	86.7
2637	1305	6.8		714	47.6
3763	1320	7.0		414	27.6
2636	1335	7.3		392	26.1
3762	1350	7.5		3,347	223
2635	1405	7.8		146	9.7
3761	1420	8.0		1,525	102

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 12 June 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
2634	1435	8.3		520	34.7
3760	1450	8.5		1,876	125
2633	1505	8.8		5,733	382
3759	1520	9.0		17,379	1,159
2632	1535	9.3		5,602	373
3758	1550	9.5		36,505	2,434
2631	1605	9.8		271	18.1
3759	1620	10.0		50,997	3,400
2630	1635	10.3		28,380	1,892
3756	1650	10.5		163,700	10,910
2629	1705	10.8		9,928	662
3755	1720	11.0		17,720	1,181
2628	1735	11.3		11,990	799
3754	1750	11.5		3,799	253
2627	1805	11.8		8,997	600
3753	1820	12.0		45,806	3,054
2626	1835	12.3		210	14
3752	1850	12.5		32,833	2,189
2625	1905	12.8		7,223	482
3751	1920	13.0		960	64
2624	1935	13.3		293	19.5
3750	1950	13.5		804	53.6
2623	2005	13.8		290	19.3
3749	2020	14.0		717	47.8
2622	2035	14.3		41	3
3748	2050	14.5		807	53.8
2621	2105	14.8		118	7.9
3747	2120	15.0		22,809	1,521
2620	2135	15.3		4,565	304
3746	2150	15.5		193	12.9
2619	2205	15.8		176	11.7
3745	2220	16.0		17,653	1,177
2618	2234	16.3		326	21.7
3744	2249	16.5		2,627	175
2617	2304	16.8		1,360	90.6
3743	2319	17.0		1,877	125
2616	2334	17.3		283	18.9
3742	2349	17.5		8,805	587
2615	0004	17.8		374	24.9
3741	0019	18.0		21,188	1,412
2614	0034	18.3		7,158	477
3740	0049	18.5		625	41.7
2613	0104	18.8		644	42.9
3739	0119	19.0		675	45.0
2612	0133	19.3		1,948	130
3738	0148	19.5		843	56.2
2611	0203	19.8		1,974	132
End of run	0218	19.9			

Designator: YAG 39-C-20 FL

Counting Time: Corrected to H+12 hours

Nominal Exposure Interval: 15 minutes

2176	1050	4.5		948	63.2
3318	1104.6	4.8		16,210	1,081
2177	1119.6	5.0		870	58.0
3319	1134.6	5.3		65,930	4,395
2178	1149.6	5.5		35,540	2,369
3320	1205.5	5.8		371,000	24,730
2179	1220.8	6.0		463	30.9

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 12 June 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
3321	1236.1	6.3		994	66.3
2180	1251.2	6.5		213	14.2
3322	1306.2	6.8		13,220	881
2181	1321.5	7.1		23	1
3323	1326.9	7.3		852	56.8
2182	1352.2	7.6		12,960	864
3324	1407.5	7.8		2,218	148
2183	1422.9	8.1		275	18.3
3325	1437.9	8.3		1,301	86.7
2184	1452.9	8.6		1,054	70.3
3326	1508.3	8.8		1,463	97.5
2185	1523.5	9.1		474	31.6
3327	1538.8	9.3		8,106	540
2186	1554.1	9.6		211	14.1
3328	1609.3	9.9		904	60.3
2187	1624.4	10.1		1,275	85
3329	1639.4	10.4		26,870	1,791
2188	1654.7	10.6		26,920	1,795
3330	1710.0	10.8		30,140	2,009
2189	1725	11.1		904	60.3
3331	1740	11.4		1,765	118
2190	1755	11.6		167	11.1
3332	1810.3	11.9		1,345	89.6
2191	1825.5	12.1		18,880	1,259
3333	1840.5	12.4		7,738	516
2192	1855.8	12.6		298	199
3334	1911.2	12.9		484	32.3
2193	1926.2	13.1		172	11.5
3335	1941.2	13.4		19,360	1,291
2194	1956.5	13.6		616	41.1
3336	2011.8	13.9		782	521
2195	2027.1	14.2		1,120	74.4
3337	2042.1	14.4		2,243	150
2196	2057.3	14.7		12,925	862
3338	2112.4	14.9		1,567	104
2197	2127.4	15.2		506	33.7
3339	2142.4	15.4		653	43.5
2198	2157.4	15.6		578	38.5
3340	2212.7	15.9		1,535	102
2199	2228.0	16.2		249	16.6
3341	2243	16.4		887	59.1
2200	2258.3	16.7		619	41.3
3342	2313.6	16.9		1,250	83.3
2201	2328.6	17.2		536	35.7
3343	2343.9	17.4		495	33.0
2202	2358.9	17.7		308	20.5
3344	0013.9	17.9		1,125	75.0
2203	0028.9	18.2		460	30.6
End of run	0042.2				

Designator: LST 611-D-50 FL

Counting Time: Corrected to H+12 hours

Nominal Exposure Interval: 15 minutes

2667	1327	7.2		426	28.4
3792	1342.3	7.4		1,079	72
2666	1357.5	7.7		28,757	1,915
3791	1412.7	7.9		622	41.5
2665	1427.9	8.1		18,747	1,250

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 12 June 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
3790	1443.2	8.4		1,891	126
2664	1458.4	8.7		69,250	4,620
3789	1513.6	8.9		31,126	2,070
2663	1528.8	9.2		6,348	422
3788	1544	9.4		785	52.4
2662	1559.2	9.7		216	14.4
3787	1614.4	9.9		348	23.2
2661	1629.6	10.2		477	31.8
3786	1644.8	10.4		398	26.5
2660	1700	10.7		472	31.5
3785	1715.2	10.9		743	49.5
2659	1730.4	11.2		218	14.5
3784	1745.6	11.4		1,088	72.5
2658	1800.8	11.7		83	5.5
3783	1816	12.0		1,922	128
2657	1831.2	12.2		840	56
3782	1846.4	12.5		1,239	82.6
2656	1901.6	12.7		63	4
3781	1916.8	13.0		626	41.7
2655	1932	13.2		425	28.3
3780	1947.2	13.5		425	28.3
2654	2002.6	13.7		432	29.8
3779	2017.8	14.0		2,482	165
2653	2033	14.2		93	6.2
3778	2048.1	14.5		11,269	751
2652	2103.3	14.8		194	12.9
3777	2118.5	15.0		965	64.3
2651	2133.7	15.3		697	46.5
3776	2148.9	15.5		536	36.7
2650	2204.1	15.8		161	10.7
3775	2219.3	16.0		402	26.8
2649	2234.5	16.3		663	44.2
3774	2250	16.5		1,481	98.7
2648	2305.2	16.8		140	9.3
3773	2320.4	17.0		402	26.8
2647	2435.6	17.3		536	35.7
3772	2550.8	17.5		187	12.5
2646	0006	17.8		1,219	81.3
3771	0021.2	18.1		1,189	79.3
2645	0036.4	18.3		375	25.0
3770	0051.6	18.5		1,658	110
2644	0106.8	18.8		4,037	269
3769	0122	19.1		1,735	116
2643	0137.2	19.3		519	34.6
3768	0152.4	19.6		409	27.3
2642	0207.6	19.8		1,209	80.6
3767	0222.8	20.1		1,112	74.1
2641	0238	20.3		2,184	145.0
3766	0253.2	20.6		988	65.9
2640	0308.4	20.8		583	38.9
End of run	0323.6				

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 12 June 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
Designator: YFNB 29-H-78 FL					
Counting Time: Corrected to H+12 hours					
Nominal Exposure Interval: 15 minutes					
3067	0626	0.1	6	912	60.8
1917	0641	0.4	24	1,426	95.0
3068	0656	0.6	36	3,404	227
1918	0711	0.9	54	3,295	220
3069	0726	1.1	66	2,239,000	149,300
1919	0741	1.4	84	967,100	64,470
3070	0756	1.6	96	619,300	41,290
1920	0811	1.9	114	Background	—
3071	0826 to 0841	2.1	126	Background	—
	to ea. 15 min			Background	—
1922	0911	2.9	174	Background	—
3073	0926	3.1	186	1,003	66.9
1923	0941	3.4	204	4,297	286
3074	0956	3.6	216	5,459	364
1924	1011 to 1026	3.9	234	Background	—
	to ea. 15 min			Background	—
1926	1111	4.9	294	Background	—
3077	1126	5.1	306	1,635	109
1927	1141	5.4	324	Background	—
3078	1156	5.6	336	Background	106
1928	1211	5.9	354	Background	—
3079	1226	6.1	366	Background	76.3
1929	1241	6.4	384	Background	—
3080	1256	6.6	396	Background	—
1930	1311	6.9	414	6,248	416
3081	1326	7.1	426	3,719	248
1931	1341 to 1356	7.4	444	Background	—
	to ea. 15 min			Background	—
1933	1441	8.4	504	Background	—
3084	1456	8.6	516	6,312	421
1934	1511 to 1526	8.9	534	Background	—
	to ea. 15 min			Background	—
3091	1826	12.1	726	Background	—
End of run	1835				
Designator: YAG 40-A-1 NA					
Counting Time: Corrected to H+12 hours					
Nominal Exposure Interval: Variable					
11-12 July 56					
1863	0700	1.6		Background	—
3016	0745	2.1		Background	—
1864	0815	2.6		Background	—
3017	0900	3.6		Background	—
1865	1003	4.5		Background	—
3018	1046	5.1		Background	—
1866	1115	5.6		Background	—
3019	1145	6.1		Background	—
1867	1222	6.9		12,290	232
3020	1315	7.6		10,360	345
1868	1345	8.1		6,036	183
3021	1418	8.6		30,350	1,084
1869	1446	9.1		99,110	3,418
3022	1515	9.6		89,020	2,967
1870	1545	10.1		93,970	3,132

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 11-12 July 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
3023	1615	10.6		72,090	2,403
1871	1645	11.1		27,380	913
3024	1715	11.6		50,380	1,679
1872	1745	12.1		50,340	1,678
3025	1815	12.6		48,960	1,632
1873	1845	13.1		28,440	948
3026	1915	13.6		40,240	1,298
1874	1946	14.1		45,210	1,559
3027	2015	14.6		21,420	714
1875	2045	14.9		8,650	577
3028	2100	15.3		12,410	414
1876	2130	15.8		21,720	603
3029	2206	16.4		18,880	787
1877	2230	16.8		1,795	56
3030	2302	17.3		803	29
1878	2330	17.8		1,142	38
3031	2400	18.3		1,403	45
1879	0031	18.8		65	2
End of run	0100	19.1			

Designator: YAG 40-B-7 NA

Counting Time: Corrected to H+12 hours

Nominal Exposure Interval: 15 minutes

11 July 56

3290	0717	1.5		431	29
2148	0732.7	1.7		794	53
3291	0747.8	2.0		625	42
2149	0802.9	2.2		0	—
3292	0818	2.5		188	12
2150	0833.1	2.7		79	5
3293	0848.2	3.0		804	54
2151	0903.3	3.2		0	—
3294	0918.4	3.5		5,975	398
2152	0933.5	3.7		14	1
3295	0948.6	4.0		476	32
2153	1003.7	4.2		2,987	199
3296	1018.8	4.5		218	14
2154	1033.9	4.7		938	62
3297	1049.0	5.0		2,590	173
2155	1104.1	5.2		287	19
3298	1119.2	5.5		71	5
2156	1134.3	5.7		2,015	135
3299	1149.4	6.0		147	10
2157	1204.5	6.2		1,233	82
3300	1219.6	6.5		228	15
2158	1234.7	6.7		314	21
3301	1249.8	7.0		1,350	90
2159	1304.9	7.2		12,562	837
3302	1320.0	7.5		14,150	943
2160	1335.1	7.7		12,110	807
3303	1350.2	8.0		75,320	5,021
2161	1405.3	8.2		751	50
3304	1420.4	8.5		355	24
2162	1435.5	8.7		35,170	2,345
3305	1450.6	9.0		675	45
2163	1505.7	9.2		44,760	2,984
3306	1520.8	9.5		44,490	2,966

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 11 July 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
2164	1535.9	9.7		6,659	444
3307	1551.0	10.0		36,910	2,461
2165	1606.1	10.2		223	15
3308	1621.2	10.5		51,410	3,427
2166	1636.3	10.7		7,156	447
3309	1651.4	11.0		5,568	3,709
2167	1706.5	11.2		2,553	170
3310	1721.6	11.5		25,350	1,690
2168	1736.7	11.7		649	43
3311	1751.8	12.0		15,744	1,050
2169	1806.9	12.2		22,710	1,514
3312	1822	12.5		4,844	323
2170	1837.1	12.7		5,514	368
3313	1852.5	13.1		24,940	1,663
2171	1907.6	13.3		13,990	933
3314	1922.7	13.6		2,190	146
2172	1937.8	13.8		17,990	1,200
3315	1952.9	14.1		2,633	176
2173	2008	14.3		11,540	769
3316	2023.1	14.6		824	55
2174	2038.2	14.8		11,081	739
3317	2053.3	15.1		1,067	71
2175	2108.4	15.3		19,981	1,332
End of run	2123.5	15.5			

Designator: YAG 39-C-20 NA

Counting Time: Corrected to H+12 hours

Nominal Exposure Interval: 15 minutes

1312	0800	2.2		105	7
1313	0815	2.4		118,320	7,888
1314	0830	2.7		21,020	1,401
1315	0845	2.9		44,430	2,962
1316	0900	3.2		49,500	3,300
1317	0915	3.4		46	3
1318	0930	3.7		111,060	7,404
1319	0945	3.9		143,380	9,559
1320	1000	4.2		365,370	24,360
1321	1015	4.4		128,200	8,547
1322	1030	4.7		101,500	6,767
1323	1045	4.9		75,770	5,051
1324	1100	5.2		147,700	9,850
1325	1115	5.4		23,030	1,535
1326	1130	5.7		47,730	3,182
1327	1145	5.9		15,450	1,030
1328	1200	6.2		89,620	5,975
1329	1215	6.4		0	—
1330	1230	6.7		6,823	455
1331	1245	6.9		172	11
1332	1300	7.2		2,386	159
1333	1315	7.4		6,483	432
1334	1330	7.7		164	11
1335	1345	7.9		1,896	126
1336	1400	8.2		43,180	288
1337	1415	8.4		4,945	330
1338	1430	8.7		3,978	262
1339	1445	8.9		85	6
1340	1500	9.2		72	5

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 11 July 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
1341	1516	9.4		3,483	232
1342	1531	9.7		1,299	86
1343	1546	9.9		147	10
1344	1601	10.2		3,144	210
1345	1616	10.4		4,528	302
1346	1630	10.7		1,271	85
1347	1646	10.9		6,906	460
1348	1701	11.2		5,309	354
1349	1716	11.4		7,442	496
1350	1731	11.7		4,778	318
1351	1746	11.9		139	9
1352	1801	12.2		2,655	177
1353	1816	12.4		0	—
1354	1831	12.7		3,118	208
1355	1845	12.9		6,136	409
1356	1901	13.2		13,890	926
1357	1916	13.4		4,381	292
1358	1931	13.7		252	17
1359	1946	13.9		535	36
1360	2001	14.2		15,940	1,063
1361	2016	14.4		436	29
1362	2031	14.7		1,137	76
1363	2046	14.9		1,243	83
1364	2101	15.2		22,240	1,483
1365	2116	15.4		22,142	1,476
1366	2131	15.7		91,205	6,080
1367	2146	15.9		8,506	567
End of run	2201	16.1			

Designator: LST 611-D-41 NA

Counting Time: Corrected to H+12 hours

Nominal Exposure Interval: 12 minutes

2898	0904	3.2		933	78
1742	0916	3.4		185	16
2899	0927.8	3.6		Background	—
1743	0939.7	3.8		Background	—
2900	0951.8	4.0		261	22
1744	1003.7	4.2		223	19
2901	1015.5	4.4		67	5.5
1745	1027.7	4.6		634	53
2902	1040.0	4.8		406	34
1746	1052.2	5.0		3,822	318
2903	1104.0	5.2		30,480	2,540
1747	1116.1	5.4		15,060	1,255
2904	1127.9	5.6		4,232	353
1748	1139.8	5.8		Background	—
2905	1151.7	6.0		6,637	718
1749	1203.6	6.2		Bkg	—
2906	1215.4	6.4		1,085	90
1750	1227.3	6.6		1,201	100
2907	1239.2	6.8		247	21
1751	1251.0	7.0		288	24
2908	1302.8	7.2		1,598	133
1752	1314.7	7.4		1,802	150
2909	1326.6	7.6		2,201	183
1753	1338.5	7.8		Background	—
2910	1350.3	8.0		453	38

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 11 July 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
1754	1402.3	8.2		417	35
2911	1414.2	8.4		323	27
1755	1426.3	8.6		579	48
2912	1438.3	8.8		222	18
1756	1450.1	9.0		163	14
2913	1502.0	9.2		97	8
1757	1513.8	9.4		129	11
2914	1525.7	9.6		125	10
1758	1537.6	9.8		191	16
2915	1549.4	10.0		191	16
1759	1601.2	10.2		145	12
2916	1613.1	10.4		Background	—
1760	1624.9	10.6		211	18
2917	1636.8	10.8		111	9
1761	1648.8	11.0		199	17
2918	1700.7	11.2		288	24
1762	1712.7	11.4		122	10
2919	1724.5	11.6		222	18
1763	1736.5	11.8		159	13
2920	1748.4	12.0		69	6
1764	1800.2	12.2		214	18
2921	1812.2	12.4		203	17
1765	1824.1	12.6		145	12
2922	1835.8	12.8		277	23
1766	1847.8	13.0		127	11
2923	1859.6	13.2		672	48
1767	1911.5	13.4		567	47
2924	1923.3	13.6		940	78
1768	1935.2	13.8		123	10
2925	1947.2 to 1959	14.0		284	24
End of run					

Designator: YFNB 13-E-57 NA

Counting Time: Corrected to H+12 hours

Nominal Exposure Interval: 15 minutes

2351	0556	0.1	6	56,590	3,773
3487	0611	0.4	24	1,743,300	116,200
2352	0626	0.6	36	918,500	61,230
3488	0641	0.9	54	931,600	62,100
2353	0656	1.1	66	194,600	12,970
3489	0711	1.4	84	146,400	9,760
2354	0726	1.6	96	100,000	6,666
3490	0741	1.9	114	57,400	3,827
2355	0756	2.1	126	69,600	4,640
3491	0811	2.4	144	82,110	5,473
2356	0826	2.6	156	10,580	705
3492	0841	2.9	174	10,300	687
2357	0856	3.1	186	1,595	106
3493	0911	3.4	204	1,028	69
2358	0926	3.6	216	4,496	300
3494	0941	3.9	234	2,365	158
2359	0956	4.1	246	5,278	352
3495	1011	4.4	264	495	33
2360	1026	4.6	276	616	41
3496	1041	4.9	294	420	28
2361	1056	5.1	306	573	38

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 11 July 56	Midpoint*of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
3497	1111	5.4	324	552	37
2362	1126	5.6	336	878	58
3498	1141	5.9	354	1,103	74
2363	1156	6.1	366	2,548	170
3499	1211	6.4	384	828	55
2364	1226	6.6	396	1,536	102
3500	1241	6.9	414	567	38
2365	1256	7.1	426	557	37
3501	1311	7.4	444	482	32
2366	1326	7.6	456	520	35
3502	1341	7.9	474	492	33
2367	1356	8.1	486	617	41
3503	1411	8.4	509	648	43
2368	1426	8.6	516	742	49
3504	1441	8.9	534	35,000*	2,333
End of run	1456	10.0	600		

Designator: How F-64 NA

Counting Time: Corrected to H+12 hours

Nominal Exposure Interval: 15 minutes

3543	0550	—	—	Background	—
2410	0605	—	—	Background	—
3544	0620	—	—	Background	—
2411	0635	0.75	45	127	8.5
3545	0650	1.0	60	24,410	1,627
2412	0705	—	75	Background	—
3546	0720	—	1	Background	—
2413	0735	—	—	Background	—
3547	0750	—	—	Background	—
2414	0805	—	135	Background	—
3548	0820	2.5	150	250	17
2415	0835	2.8	168	11,020	736
3549	0850	3.0	180	372	25
2416	0905	3.3	198	Background	—
3550	0920	3.5	210	573	38
2417	0935	3.8	228	2,450	163
3551	0950	4.0	240	Background	—
2418	1005	4.3	258	16,670	1,111
3552	1020	4.5	270	242	16
2419	1035	4.8	288	129	9
3553	1050	5.0	300	122	8
2420	1105	5.3	318	Background	—
3554	1120	5.5	330	133	9
2421	1135	5.8	348	Background	—
3555	1150	6.0	360	Background	—
2422	1205	6.3	378	Background	—
3556	1220	6.5	390	602	40
2423	1235	6.8	408	5,739	383
End of run	1250				

Designator: YFNB 29-H-78 NA

Counting Time: Corrected to H+12 hours

Nominal Exposure Interval: 15 minutes

914	—	—	—	Background	—
915	0556	0.1	6	Background	—
916	0611	0.4	24	892	59
917	0626	0.6	36	740	49

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 11 July 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
918	0641	0.9	54	78,010	5,201
919	0656	1.1	66	179,514	11,970
920	0711	1.4	84	Background	—
921	0726	1.6	96	Background	—
922	0741	1.9	114	Background	—
923	0756	2.1	126	Background	—
924	0811	2.4	144	Background	—
925	0826	2.6	156	Background	—
926	0841	2.9	174	26,850	1,790
927	0856	3.1	186	8,913	594
928	0911	3.4	204	703	47
929	0926	3.6	216	Background	—
930	0941	3.9	234	4,887	326
931	0956	4.1	246	Background	—
932	1011 to 1026	4.4	264	Background	—
	to			Background	—
	ea. 15 min			Background	—
969	1926	13.6	816	Background	—
End of run	1941	13.8	828		

Designator: YAG 40-A-1 TE

Counting Time: Corrected to H+12 hours

Nominal Exposure Interval: Variable

1850	0810	2.7		35	—
2994	0951	4.4		147,748	3,890
1839	1029	4.9		607,100	40,470
P-2999	1044	5.1		537,776	48,890
1842	1055	5.3		3,761,285	188,060
3000	1115	5.7		11,624,936	465,000
1856	1140	6.1		17,325,405	866,300
P-2993	1200	6.4		3,116,723	207,780
1834	1215	6.6		6,376,846	425,100
2986	1230	6.9		5,266,514	309,790
1844	1247	7.1		7,439,262	572,300
P-2991	1300	7.4		1,608,283	100,517
1838	1316	7.6		5,194,303	346,300
2992	1331	7.9		3,440,155	172,007
1837	1351	8.3		10,462,893	373,700
P-2997	1419	8.8		2,885,754	96,190
1832	1449	9.3		11,137,524	484,200
2988	1512	9.6		776,442	51,760
1855	1527	9.9		5,835,239	291,800
P-3005	1547	10.2		767,586	38,380
1843	1607	10.5		3,709,095	185,400
2990	1627	10.9		2,940,929	117,637
1852	1652	11.4		2,911,091	80,863
P-2989	1728	12.0		1,123,353	35,104
1836	1800	12.5		1,859,306	58,110
3004	1832	13.0		482,186	17,220
1841	1900	13.5		354,591	11,440
P-2995	1931	14.0		43,616	1,504
1849	2000	14.5		43,530	1,451
3002	2030	15.0		5,831	188
1840	2101	15.5		1,356,448	46,770
P-2987	2130	16.0		4,611	140
1835	2203	16.5		833	25
3006	2236	16.9		4,888	444
1848	2247	17.2		1,287	46
P-3003	2315	17.5		—	—
1851	2316	17.7		1,031	34
3008	2346	18.0		—	—
1833	2347	18.2		803	26
End of run	2413				

TABLE B.2 CONTINUED

Instrument	Tray Number	Exposure Began (Mike Time) 21 July 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
			hr	min		
Designator: YAG-40-A-1, 2 TE						
Counting Time: Corrected to H+12 hours						
Nominal Exposure Interval: Variable						
Grease Trays only from each instrument						
A-1	1850	0810 to 0951	2.7		~35	0.315
A-1	1839	1029 to 1044	4.9		607,100	40,470
A-1	1842	1055 to 1115	5.3		4,455,285	405,020
A-2	2142	1115 to 1140	5.7		18,777,802	1,252,000
A-1	1856	1140 to 1200	6.1		17,325,405	866,300
A-2	2145	1200 to 1215	6.4		9,013,823	600,921
A-1	1834	1215 to 1230	6.6		6,376,846	425,100
A-2	2144	1230 to 1247	6.9		8,920,405	524,700
A-1	1844	1247 to 1300	7.1		7,439,262	572,300
A-2	2125	1300 to 1316	7.4		7,289,977	449,400
A-1	1838	1316 to 1331	7.6		5,194,303	346,300
A-2	2129	1331 to 1351	7.9		6,666,000	333,300
A-1	1837	1351 to 1419	8.3		10,462,893	373,700
A-2	2132	1419 to 1449	8.8		18,810,709	627,000
A-1	1832	1449 to 1512	9.3		11,137,524	484,200
A-2	2131	1512 to 1527	9.6		2,518,337	167,900
A-1	1855	1527 to 1547	9.9		5,835,239	291,800
A-2	2133	1547 to 1607	10.2		4,602,232	230,110
A-1	1843	1607 to 1627	10.5		3,709,095	185,400
A-2	2137	1627 to 1652	10.9		4,649,959	186,000
A-1	1852	1652 to 1728	11.4		2,911,091	80,863
A-2	2136	1728 to 1800	12.0		5,283,346	165,100
A-1	1836	1800 to 1832	12.5		1,859,306	58,110
A-2	2139	1832 to 1900	13.0		633,986	22,640
A-1	1841	1900 to 1931	13.5		354,591	11,440
A-2	2138	1931 to 2000	14.0		66,707	2,300
A-1	1849	2000 to 2030	14.5		43,530	1,451
A-1	1840	2101 to 2130	15.5		1,356,448	46,770
A-1	1835	2203 to 2236	16.5		833	25
Designator: YAG 40-B-7 TE						
Counting Time: Corrected to H+12 hours						
Nominal Exposure Interval: 15 minutes						
	3094	1002	4.4		790	53
	1945	1017	4.6		13,193	879
	3095	1032	4.9		83,782	5,591
	1946	1047	5.1		1,526,080	101,740
	3096	1102	5.4		481,080	32,072
	1947	1117	5.6		3,543,120	236,200
	3097	1132	5.9		747,536	49,840
	1948	1147	6.1		3,064,320	204,290
	3098	1202	6.4		528,960	35,260
	1949	1217	6.6		2,190,320	146,020
	3099	1232	6.9		908,048	60,536
	1950	1247	7.1		3,155,520	210,370
	3100	1302	7.4		946,960	63,130
	1951	1317	7.6		2,745,120	183,008
	3101	1332	7.9		535,040	35,670
	1952	1347	8.1		1,551,920	103,460
	3102	1402	8.4		843,600	56,240

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 21 July 56.	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
1953	1417	8.6		1,749,520	116,630
3103	1432	8.9		513,760	34,250
1954	1447	9.1		3,302,960	220,200
3104	1502	9.4		826,880	55,130
1955	1517	9.6		1,744,960	116,300
3105	1532	9.9		568,480	37,890
1956	1547	10.1		1,130,880	75,390
3106	1602	10.4		607,544	40,500
1957	1617	10.6		669,864	44,660
3107	1632	10.9		298,224	19,880
1958	1647	11.1		922,792	61,520
3108	1702	11.4		218,272	14,550
1959	1717	11.6		322,088	21,470
3109	1732	11.9		36,328	2,421
1960	1747	12.1		140,448	9,363
3110	1802	12.4		112,875	7,525
1961	1817	12.6		322,088	21,470
3111	1832	12.9		56,118	3,741
1962	1847	13.1		88,524	5,901
3112	1902	13.4		31,692	2,112
1963	1917	13.6		35,902	2,393
3113	1932	13.9		4,985	332
1964	1947	14.1		14,029	935
3114	2002	14.4		18,057	1,203
1965	2017	14.6		32,132	2,142
3115	2032	14.9		5,563	370
1966	2047	15.1		37,240	2,482
3116	2102	15.4		19,912	1,327
1967	2117	15.6		44,323	2,954
3117	2132	15.9		2,553	170
1968	2147	16.1		7,174	478
3118	2202	16.4		1,398	93
1969	2217	16.6		56,513	3,767
3119	2232	16.9		10,396	693
1970	2247	17.1		54,476	3,631
3120	2302	17.4		19,456	1,297
1971	2317	17.6		43,502	2,900
3121	2332	17.9		668	44
1972	2347	18.1		322,513	21,510
End of run	0002	18.3			

Designator: YAG 39-C-20 TE

Counting Time: H + 36.4 to H + 40.8 hours

Nominal Exposure Interval: 15 minutes

2813	0747	2.1		63,740	4,249
3933	0802	2.4		143,380	9,558
2812	0817	2.6		1,132,000	75,430
3932	0832	2.9		1,148,000	76,560
2811	0847	3.1		4,362,000	290,780
3931	0902	3.4		2,458,000	163,900
2810	0917	3.6		8,359,000	557,200
3930	0932	3.9		4,875,000	325,000
2809	0947	4.1		18,570,000	1,238,000
3929	1002	4.4		9,457,000	630,400
2808	1017	4.6		19,780,000	1,318,000
3928	1032	4.9		1,074,000	71,580
2807	1047	5.1		1,868,000	124,600

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 21 July 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
3927	1102	5.4		916,700	61,110
2806	1117	5.6		507,400	33,820
3926	1132	5.9		105,700	6,607
2805	1148	6.1		731,100	48,740
3925	1203	6.4		193,300	12,880
2804	1218	6.6		188,900	12,590
3924	1233	6.9		291,200	19,410
2803	1248	7.1		1,869,000	124,600
3923	1303	7.4		553,600	38,910
2802	1318	7.6		674,900	44,990
3922	1333	7.9		139,400	9,293
2801	1348	8.1		374,000	24,940
3921	1403	8.4		130,800	8,721
2800	1418	8.6		379,400	25,290
3920	1433	8.9		21,900	1,459
2799	1448	9.1		57,380	3,825
3919	1503	9.4		76,740	5,116
2798	1518	9.6		57,040	3,802
3918	1533	9.9		20,660	1,377
2797	1548	10.1		100,400	6,695
3917	1603	10.4		20,820	1,388
2796	1618	10.6		39,890	2,659
3916	1633	10.9		4,680	312
2795	1648	11.1		13,260	884
3915	1703	11.4		13,650	909
2794	1718	11.6		58,060	3,870
3914	1733	11.9		7,248	483
2793	1748	12.1		6,096	406
3913	1803	12.4		6,096	406
2792	1818	12.6		14,670	978
3912	1833	12.9		57,940	3,862
2791	1848	13.1		56,020	3,734
3911	1903	13.4		46,260	3,084
2790	1918	13.6		136,800	9,118
3910	1933	13.9		27,860	1,857
2789	1948	14.1		8,144	543
3909	2003	14.4		1,616	108
2788	2018	14.6		8,656	577
3908	2033	14.9		9,296	619
2787	2048	15.1		89,810	5,987
3907	2103	15.4		12,530	835
2786	2118	15.6		726,900	48,458*
End of run	2133	15.8			

Designator: LST 611-D-41 TE

Counting Time: H+321 to H+297 hours

Nominal Exposure Interval: 12 minutes

2262	1303	7.4	5,416	451
3401	1315	7.6	3,606	301
2261	1327	7.8	6,272	523
3400	1339	8.0	1,448	121
2260	1351	8.2	2,286	190
3399	1403	8.4	1,130	94
2259	1415	8.6	3,516	293
3398	1427	8.8	3,800	317
2258	1439	9.0	7,370	614
3397	1451	9.2	6,196	516

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 21 July 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
2257	1503	9.4		11,660	971
3396	1515	9.6		9,432	786
2256	1527	9.8		18,920	1,576
3395	1539	10.0		6,984	582
2255	1551	10.2		24,090	2,007
3394	1603	10.4		11,690	974
2254	1615	10.6		79,410	6,620
3393	1627	10.8		20,380	1,698
2253	1639	11.0		36,000	3,000
3392	1651	11.2		9,464	789
2252	1703	11.4		17,260	1,438
3391	1715	11.6		7,680	640
2251	1727	11.8		12,000	1,000
3390	1739	12.0		2,978	248
2250	1751	12.2		10,360	863
3389	1803	12.4		5,664	472
2249	1815	12.6		9,900	825
3388	1827	12.8		7,626	636
2248	1839	13.0		8,192	683
3387	1851	13.2		10,580	882
2247	1903	13.4		35,800	2,984
3386	1915	13.6		12,620	1,052
2246	1927	13.8		8,488	707
3385	1939	14.0		2,400	200
2245	1951	14.2		3,468	289
3384	2003	14.4		3,480	290
2244	2015	14.6		3,648	304
3383	2027	14.8		2,144	179
2243	2039	15.0		3,774	314
3382	2051	15.2		946	79
2242	2103	15.4		406	34
3381	2115	15.6		510	42
2241	2127 to 2139	15.8		214	18
to	ea. 12 min			Background	—
2235	2351	18.2		Background	—
End of run	0003	18.3			

Designator: YFNB 13-E-57 TE

Counting Time: H+17.4 to H+17.8 hours

Nominal Exposure Interval: 15 minutes

1974	0546	7	20,608	1,375
3123	0601	22	22,530	1,472
1975	0616	37	291,600	19,420
3124	0631	52	2,351,000	156,700
1976	0646	67	1,603,000	106,800
3125	0707	82	1,483,000	98,900
1977	0716	97	13,780,000	917,500
3126	0731	112	3,032,000	200,000
End of run	0746	120		

TABLE B.2 CONTINUED

Tray Number	Exposure Began (Mike Time) 21 July 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
Designator: How-F-64 TE					
Counting Time: H+19.2 to H+20.4 hours					
Nominal Exposure Interval: 15 minutes					
2206	0546	0.1	6	784	52
3347	0601	0.4	24	0	0
2207	0616	0.6	36	1,040	69
3348	0631	0.9	54	784	52
2208	0646	1.1	66	1,424	95
3349	0701	1.4	84	0	0
2209	0716	1.6	96	784	52
3350	0731	1.9	114	0	0
2210	0746	2.1	126	880	59
3351	0801	2.4	144	188,500	12,560
2211	0816	2.6	156	260,100	17,300
3352	0831	2.9	174	194,900	13,000
2212	0846	3.1	186	320,800	21,400
3353	0901	3.4	204	16	1
2213	0916	3.6	216	0	0
3354	0931	3.9	234	1,040	69
2214	0946	4.1	246	14,480	965
3355	1001	4.4	264	16	1
2215	1016	4.6	276	400	27
3356	1031	4.9	294	656	44
2216	1046	5.1	306	1,040	69
3357	1101	5.4	324	0	0
2217	1116	5.6	336	528	35
3358	1131	5.9	354	7,688	512
2218	1146	6.1	366	400	27
3359	1201	6.4	384	0	0
2219	1216	6.6	396	144	9
3360	1231	6.9	414	2,318	155
2220	1246	7.1	426	17,170	1,142
3361	1301	7.4	444	2,192	146
2221	1316	7.6	456	2,064	138
3362	1331	7.9	474	3,216	212
2222	1346	8.1	486	3,348	223
End of run	1357	8.2	492		
Designator: YFNB-29-H-78 TE					
Counting Time: H+79.2 to H+81.6 hours					
Nominal Exposure Interval: 15 minutes					
1371	0546	0.1	6	2,016	134
1372	0601	0.4	24	9,184	610
1373	0616	0.6	36	2,379,000	162,000
1374	0631	0.9	54	4,874,000	325,000
1375	0646	1.1	66	7,905,000	525,000
1376	0701	1.4	84	7,930,000	527,000
1377	0716	1.6	96	9,919,000	612,000
1378	0731	1.9	114	7,897,000	525,000
1379	0746	2.1	126	6,577,000	438,000
1380	0801	2.4	144	8,594,000	570,000
1381	0816	2.6	156	2,962,000	198,000
1382	0831	2.9	174	9,229,000	615,000
1383	0845.5	3.1	186	10,560,000	700,000
1384	0900	3.4	204	15,715,000	1,040,000
1385	0915	3.6	216	9,448,000	630,000

TABLE B. 2 CONTINUED.

Tray Number	Exposure Began (Mike Time) 21 July 56	Midpoint of Exposure TSD		γ Activity counts/min	γ Activity per Unit Time counts/min ²
		hr	min		
1386	0930	3.9	234	6,331,000	422,000
1387	0945	4.1	246	3,128,000	209,000
1388	1000	4.4	264	1,944,000	129,000
1389	1015	4.6	276	2,067,000	138,000
1390	1030	4.9	294	841,900	56,100
1391	1045	5.1	306	370,600	24,600
1392	1100	5.4	324	311,200	20,800
1393	1115	5.6	336	58,530	3,900
1394	1130	5.9	354	8,740	580
1395	1145	6.1	366	1,316	87
1396	1200	6.4	384	15,650	1,040
1397	1215	6.6	396	2,340	150
1398	1230	6.9	414	2,852	190
1399	1245	7.1	426	4,900	326
1400	1300	7.4	444	17,840	1,180
1401	1315	7.6	456	46,880	3,120
1402	1330	7.9	474	8,484	565
1403	1345	8.1	486	2,596	173
1404	1400	8.4	504	5,924	400
1405	1415	8.6	516	23,300	1,550
1406	1430	8.9	534	35,750	2,300
1407	1445	9.1	546	78,240	5,200
1408	1500	9.4	564	12,200	800
1409	1515	9.6	576	5,540	370
1410	1530	9.9	594	4,004	268
1411	1545	10.1	606	14,120	920
1412	1600	10.4	624	9,892	655
1413	1615	10.6	636	33,570	2,200
1414	1630	10.9	654	45,600	3,000
1415	1645	11.1	666	76,320	5,000
1416	1700	11.4	684	28,070	1,870
1417	1715	11.6	696	83,600	5,550
1418	1730	11.9	714	8,868	590
1419	1745	12.1	726	34,340	2,300
1420	1800	12.4	744	35,880	2,360
1421	1815	12.6	756	21,170	1,410
1422	1830	12.9	774	16,800	1,120
1423	1845	13.1	786	114,980	7,600
1424	1900	13.4	804	131,360	8,700
1425	1915	13.8	816	292,500*	19,400
End of run	1945	14.0	840		

*Probably cross-contaminated in transport.

TABLE B.3 MEASURED RATE OF PARTICLE DEPOSITION, SHOTS ZUNI AND TEWA

Station	Mean Collection Time (T&D) hr	Number of Particles/N ³ /hr/micron-interval																			
		Mean Particle Size, microns																			
		52.5	72.5	92.5	112.5	132.5	155	195	235	275	315	365	485	605	725	845	1,000	1,400	1,800	2,200	2,600
Shot Zuni																					
YAG 40-	3.98	2,139	609	310	168	72	42	46	67	42	20	27	3	0.02							
B-7 ZU	4.98	9,229	3,042	2,507	1,641	1,292	807	399	244	163	89	14	0.01								
	4.99	2,434	3,342	2,198	1,308	920	428	297	129	43	7										
	7.00	7,330	1,584	922	599	344	278	127	65	16	10	13	0.01								
	8.02	754	224	82	49	22	6														
	9.03	2,899	634	362	221	120	39	36	1	3											
	10.04	1,180	280	169	92	67	32	15	15	1	0.4	0.5									
	11.06	1,059	219	127	63	66	13	1	1	0.4											
	12.07	529	237	92	23	9	2	0.4	0.4												
	13.08	741	201	106	63	28	40	8	0.4	2											
	14.09	786	246	149	81	22	7	2			1										
	15.11	105	201	147	58	15	0.1	7	0.1												
YAG 39-	13.03	918	322	181	28	38	8	5		1											
C-20 ZU	15.03	183	125	89	25	12	1	4													
	17.10	562	127	72	93	32	37	6					0.7								
	19.14	3,637	517	162	85	16	19	5	2	3	0.2				0.2		0.01				
	21.18	361	126	181	79	63	36	8	0.1				0.7								
	23.18	306	110	52	27	1	4	0.8	0.1												
	25.18	260	59	32	22	4	5	0.3		2											
	27.18	796	273	133	31	14	11	13	3	0.8											
	29.18	61	70	10	16	0.9	7	5													
YFNB 29-	0.12	5,607	909	628	431	61	59	48	7		0.3	6									
G-71 ZU	0.23	11,623	1,620	959	235	177	133	91	17	18	17	13	4	0.01							
	0.43	3,058	815	305	432	97	163	28	69	1	11	1	1								
	0.68	5,700	1,100	399	133	102	126	58	12			3	0.1								
	0.90	9,208	2,450	1,149	1,072	689	484	616	207	295	293	133	74	52	20	24	7	0.2	0.04	0.9	
	1.11	4,713	1,015	404	141	162	117	21	2	33	2	5	12	6	4	4	1	0.4			
	1.27	3,441	1,898	429	270	51	10	38		10	10	20	15	3	5			0.01			
	1.49	6,318	1,760	1,057	257	143	88	15	71	45	13	14	30	9	15			0.01			
	1.67	10,770	3,764	1,113	454	374	129	205	10	30	57	8	9	10	3	0.1	0.3	0.3			
YFNB 13-	0.63	688	299	179	82	79	54	29	17	32	14	6	3	5	0.6	1	0.5	1	0.01		
E-57 ZU	2.13	857	235	170	55	50	19	5	14	9	6	6	3	3	2	0.04					
	3.63	1,439	420	271	163	124	53	22	15	3	0.3	1									
	5.38	352	69	45	29	10	0.4	0.4	2												
	6.63	306	63	41	8	5	6	7	8	2	0.4	0.3									
	8.13	428	68	64	23	20	80		2												
	9.63	183	73	17	12	11	2	2	1												
	11.38	581	101	45	44	15	5	5	0.2	2											
	12.88	1,546	447	181	86	52	45	4	4	0.6	1	0.2	0.1	0.1		1			0.2		
How F-64	0.38	673	242	131	41	29	30	7	4	0.1	1										
ZU	1.38	443	254	86	38	7	10	6	9	2	7	4	1	5	0.5	0.1	0.01				
	2.38	352	171	118	35	3	10	1	0.3		1	3	0.4	0.1	0.4						
	3.38	597	284	112	22	18	6	0.7	1	1		0.5	0.02								
	4.13	4,074	1,184	495	339	171	184	72	43	23	13	7	0.9	1							
	5.34	168	92	53	14	14	4														
	6.38	642	153	88	27	29	7	3	1	1	4										
	7.38	2,173	754	374	235	72	42	20	14	16	1	3	0.2	0.1							
	8.13	1,010	428	161	67	24	28	10	1			0.5	0.02								
	9.38	984	384	109	71	24	11	9	1	0.3		0.1	0.7								
	10.38	30	256	618	370	169	74	52	15	11	4	0.9	0.6	0.02	0.4						

TABLE B.3 CONTINUED

Station	Mean Collection Time (TSD) hr	Number of Particles/n ³ /hr/micron-interval																				
		Mean Particle Size, microns																				
		52.5	72.5	92.5	112.5	132.5	155	195	235	275	315	365	485	605	725	845	1,000	1,400	1,800	2,200	2,400	
Shot Tows																						
YAG 40-	4.64	1,267	271	139	119	36	10	3	1	1												
B-7 TE	6.14	2,161	1,230	822	309	135	82	59	21	12			1	0.4								
	7.64	1,607	711	858	395	265	175	80	33	10	0.05		1	0.02								
	9.14	737	730	495	296	164	121	43	19	2	1											
	10.64	1,104	484	272	194	144	46	41	1	1	1											
	12.14	392	151	85	29	10	1	5	1						0.5	0.02						
	13.64	470	241	79	52	7	1	3			1				0.2							
	15.14	958	49	64	25	11	16	2				1										
	16.64	571	180	121	72	33	45	3														
YAG-39-	3.64	3,952	885	459	126	71	110	154	195	128	86	42	3	0.01								
C-20 TE	5.64	424	508	202	70	36	16	12	10	4												
	6.64	1,882	268	126	55	9	21	11	5													
	8.16	684	835	513	171	79	38	12	1	5	2	2	0.02									
	9.66	476	124	67	15	12	2	4	4													
	11.16	971	190	94	25	32	7	2	2	1	1											
	12.66	579	139	39	28	6	2	3					0.8									
	14.16	1,371	178	58	40	16	21			1			0.1	0.1								
	15.16	863	286	114	69	24	20	9	2	8	0.6	0.8	0.6									
LST 611-	8.16	76	189	278	132	79	30	12		1												
D-41 TE	8.98	342	244	264	147	106	29	25	2													
	10.18	764	272	201	122	87	50	19														
	10.98	157	602	412	156	128	37	19	1													
	12.18	114	214	245	82	63	53	10	3													
	12.98	385	100	134	112	61	65	3														
	14.18	290	102	61	40	17	2	2														
	14.98	429	264	122	34	19	10						0.03	0.03								
	16.18	511	127	87	64	12	11	5	5	1			1									
16.98	77	166	184	92	24	8	6	1							0.05							
YFNB 13-	0.13	1,334	565	725	538	352	94	31	15	7	2	0.2			0.4	0.6			0.1			
E-57 TE	0.63	1,198	375	265	166	147	69	77	24	7	1	0.05	0.8	0.1								
	1.13	552	837	591	612	333	120	43	13	23	6	6	0.5		0.7							
	1.63	976	928	652	302	155	125	52	23	22	28	25	13	1	0.4	0.2						
YFNB 29-	0.13	536	2,196	1,134	275	146	72	43	27	8	2	4	0.4	0.6	2	0.1	0.09					
H-76 TE	1.38	310	1,120	990	491	360	153	146	101	85	41	30	42	26	7	0.04						
	2.87	135	809	481	229	151	79	43	45	150	125	142	47	0.5	5	0.02						
	4.37	322	183	206	65	51	46	73	68	72	21	3										
	5.87	256	68	48	10		16	2	2													
	7.37	113	97	50	13		9	1	2													
	8.87	512	99	47	9		1	3	1													
	10.37	188	247	70	25		4		1													
	11.87	514	269	106	31	18	7	4		2												
	13.37	200	278	114	12	33	9	4	2	1			0.8									
	How F-	0.13	840	361	129	94	38	29	11	5												
64 TE	1.13	941	289	112	85	21	24	1	1													
	2.13	164	199	102	90	75	20	12	1	4	1	0.3										
	3.13	157	79	121	48	25	13	8		2												
	4.13	462	301	162	97	70	62	16				0.02	0.4									
	5.13	208	205	88	34	13	9					0.1	0.1									
	6.13	220	163	86	36	4	32	4	1	0.	0.3											
	7.13	2,189	518	151	104	72	54	7		1												
	8.13	842	404	145	60	32	19	1	2	4	2	1	0.02	0.4								

TABLE B.4 CALCULATED RATE OF MASS DEPOSITION, SHOTS ZUNI AND TEWA

Station	Mean Collection Time (TSD) hr	Microgram/m ³ /hr/micron-interval																			$\mu\text{g}/\text{m}^3\text{-hr}$ (52.5 to 2,400 μ)	
		Mean Particle Size, microns																				
		52.5	72.5	92.5	112.5	132.5	155	195	235	275	315	365	465	605	725	845	1,000	1,400	1,800	2,200	2,600	
Shot Zuni																						
YAO 40-	3.98	383	287	303	296	208	197	426	1,078	1,068	808	1,431	534	5								384,855
B-7 ZU	4.98	1,682	1,433	2,450	2,087	3,716	3,713	3,657	3,927	4,213	3,471	693	2									1,051,066
	5.99	4,358	1,574	2,148	2,301	3,646	1,988	3,727	2,070	1,124	275	22										523,970
	7.00	1,312	746	901	1,084	891	1,282	1,189	1,046	416	396	804	2									319,725
	8.02	138	106	80	86	64	33															9,680
	9.03	607	299	364	390	346	183	338	31	92												59,520
	10.04	211	132	107	162	269	149	143	280	48												38,718
	11.06	190	103	124	147	190	83	11	22	10	16	21	21									23,703
	12.07	96	112	91	42	28	11	4	6													7,875
	13.08	133	96	104	113	83	187	77	7	82												20,790
	14.09	141	116	146	90	66	36	21														12,318
	18.11	19	95	145	89	44	1	64	2	2	52											12,080
YAO 39-	12.03	164	192	186	47	119	36	48	1	36												16,360
C-20 ZU	16.03	33	59	87	46	37	6	36	1													7,293
	17.10	191	60	71	164	92	173	69					100									23,990
	19.14	651	244	168	98	48	69	53	40	89	11			140	11							49,120
	21.16	65	59	178	140	181	167	80	3				103	1								28,870
	23.18	58	52	81	49	6	19	8	22													6,018
	25.18	47	28	32	39	13	26	3	82													6,210
	27.18	142	129	131	56	41	51	124	60	22												19,890
	29.18	11	33	11	29	3	34	58	1													5,160
YFNB 29-	0.12	1,004	428	614	760	176	273	446	118		18	403										121,620
G-71 ZU	0.23	2,081	763	930	418	811	613	839	274	471	678	790	625	3								341,396
	0.43	848	384	290	760	281	760	257	1,113	33	440	75	160									184,070
	0.68	1,020	616	391	238	394	664	633	204			227	22									122,090
	0.90	1,648	1,184	1,123	1,067	1,982	2,231	6,334	3,224	7,600	11,229	7,999	10,436	14,481	9,421	18,078	9,541	978	338	12,888		16,159,648
	1.11	844	478	395	250	466	639	198	47	862	96	357	1,728	1,823	2,321	3,603	1,396	189				1,877,700
	1.27	616	694	419	477	148	48	287	1	269	412	1,234	2,184	1,003	2,603	11						853,960
	1.49	1,489	829	1,039	492	413	667	143	1,143	1,164	629	879	4,250	2,599	7,517	13						1,856,015
	1.67	1,928	1,773	1,068	799	1,077	994	1,088	172	787	2,218	924	1,368	2,840	1,689	127	437	1,084				2,054,285
YFNB 13-	0.63	123	141	176	145	229	252	273	277	826	648	409	464	1,555	317	814	1,004	3,432	78			2,038,090
E-87 ZU	2.13	163	111	167	97	146	86	49	233	247	214	271	490	993	1,412	304						425,380
	3.63	238	198	268	297	359	248	308	244	89	14	102	10									63,355
	5.38	63	33	44	52	36	3	4	33													6,670
	6.63	55	30	40	16	16	20	73	131	69	17	18										16,870
	8.13	77	32	63	42	60	41		33													6,400
	9.63	39	26	17	22	24	9	26	21													4,890
	11.38	104	48	44	76	43	27	49	3	70	4											10,505
	12.88	277	211	178	192	180	208	64	68	21	54	18	19	37	2	1,013	5	690	4			329,360
How F-64 ZU	0.38	121	114	128	79	86	139	66	78	4	53											21,190
	1.38	79	120	87	68	23	46	63	186	62	307	255	247	1,440	277	759	20					375,050
	2.38	63	81	116	62	9	49	17	6	3	76	197	66	46	215							69,430
	3.38	107	134	110	40	52	28	7	23	38		32	3									17,305
	4.13	729	668	448	596	484	710	661	701	602	538	438	134	296								258,963
	6.38	30	44	53	29	41	22															4,393
	6.38	115	72	86	48	65	32	32	22	33	156	1										17,518
	7.38	289	355	266	414	208	196	190	226	391	54	195	42	37								103,190
	8.13	181	202	189	118	71	133	88	28	2		32	3									27,045
	9.38	173	181	187	126	72	82	31	30	10		11	103									38,485
	10.38	8	120	601	681	486	342	483	243	301	180	49	93	7	218							138,462

TABLE B-4 CONTINUED

Station	Mean Collection Time (TSD) hr	Microgram/ft ³ /hr/micron-interval																$\mu\text{g}/\text{ft}^3\text{-hr}$ (52.5 to 2,400 μ)						
		Mean Particle Size, microns																						
		52.5	72.5	92.5	112.5	132.5	152	175	200	235	275	315	365	425	505	725	845	1,000	1,400	1,800	2,200	2,400		
Shot Tows																								
YAG 40-	4.04	227	128	136	210	102	47	36	22	33												20,310		
B-7 TE	4.14	381	580	603	544	383	201	543	350	332	28	80	80	6									135,560	
	7.04	280	335	546	690	762	805	733	535	272	2			221	6								160,745	
	9.14	132	344	484	522	474	541	402	309	57	52	3											89,050	
	10.04	190	226	267	342	414	214	306	21	40	16												65,860	
	12.14	70	71	93	51	33	37	54	22						75	7								23,055
	12.04	84	114	78	93	21	6	38	1	24					17	37								20,320
	13.14	172	23	63	44	32	75	32	13	20	75	9	18											17,885
	16.04	102	85	118	127	85	209	30	12	20														20,840
YAG 39-	2.04	700	417	449	222	205	509	1,410	2,140	2,300	2,359	4,289	2,640	112									793,650	
C-20 TE	3.04	76	240	190	124	111	74	112	165	112	3												37,885	
	6.00	327	120	124	97	27	39	189	88	2													20,940	
	8.10	122	204	602	301	226	178	111	20	124	100	124	3										62,625	
	9.00	85	59	66	27	28	13	42	72														9,325	
	11.10	174	90	92	44	92	25	25	20	22	50												15,825	
	12.00	104	66	20	50	18	9	24						49									10,225	
	14.10	245	84	27	72	40	80	2	1	24				145	131								18,020	
	16.10	185	126	112	122	70	26	90	42	144	21	842	641											42,065
LST 411-	8.10	14	89	272	222	229	142	111	1	47	65												31,225	
D-41 TE	9.00	61	115	256	289	505	127	221	24	12													35,500	
	10.10	127	128	197	216	250	221	182															32,700	
	10.00	28	284	462	279	260	172	180	3														40,080	
	12.10	21	101	220	110	184	244	84	48														24,505	
	12.00	69	48	121	197	177	200	21	1														22,905	
	14.10	52	48	60	71	49	12	22															4,105	
	14.00	77	125	119	61	54	47	2					22	49									24,810	
	16.10	92	70	85	114	25	54	54	92	42	3	62											21,665	
16.00	14	78	181	162	71	42	55	17							270	20						52,560		
YFNB 13-	0.12	220	267	709	848	1,014	426	288	250	198	115	15				198	495	2	484	46			429,220	
E-47 TE	0.42	214	177	258	292	424	320	707	287	185	52	3	119		22								114,155	
	1.12	92	205	578	1,078	957	555	209	210	607	240	6,050	495			722	168						285,440	
	1.02	175	427	627	522	647	578	479	276	570	1,098	1,846	1,872	618	198								622,925	
YFNB 20-	0.12	96	1,025	1,108	485	420	222	424	221	90	252	82	198	1,114	107	118							249,010	
M-75 TE	1.20	56	221	967	865	1,024	708	1,240	1,624	2,192	1,684	1,826	8,065	7,287	2,204	22							2,594,255	
	2.07	24	281	471	404	425	264	402	722	2,079	4,879	6,688	6,626	1,408	249	18							2,268,925	
	4.27	58	27	202	116	147	218	877	1,102	1,874	844	18											197,475	
	5.07	46	22	48	18	2	76	20	42														8,665	
	7.27	20	46	20	24	1	46	12	24														5,685	
	8.07	92	47	47	18		14	51	22														7,265	
	10.27	24	116	89	46		19	6	22	2													7,790	
	11.07	92	127	104	56	52	22	44	69														12,775	
12.27	26	121	112	22	26	48	44	27	26				51										18,085	
How F-64	0.12	150	170	125	166	112	127	102	92														27,120	
TE	1.12	169	120	110	120	62	112	9	50	11	16												16,675	
	2.12	29	94	101	159	217	96	111	22	119	67	281											31,945	
	3.12	28	26	119	86	74	61	77	2	89													15,495	
	4.12	82	142	159	172	202	289	152	5				1	66									27,580	
	5.12	27	97	96	61	29	2	84	122	12	17	10	20										22,275	
	8.12	40	77	82	64	12	16	28	19	22	15		27	61									27,000	
	7.12	292	244	146	164	207	252	86		26	2												24,275	
	8.12	151	191	142	108	94	82	18	48	111	88	74	4	122										49,270

TABLE B.5 MEASURED RATE OF PARTICLE DEPOSITION, SUPPLEMENTARY DATA, SHOTS ZUNI AND TEWA

Station	Mean Collection Time (TSD) hr	Number of Particles/ μ^2 /hr/micron-interval																			
		Mean Particle Size, microns																			
		52.5	72.5	92.5	112.5	132.5	155	195	235	275	315	365	485	605	725	845	1,000	1,400	1,800	2,200	2,600
Shot Zuni																					
YAG 40-	3.49	5,933	817	317	98	47	16	14	3	22	2	0.8	0.8								
B-7 ZU	3.74	702	142	70	17	28	10	39	20	11	4	5	4	0.1	0.6						
	4.47	2,560	719	381	268	229	218	295	250	239	141	82	2								
	5.23	13,014	8,721	3,903	2,251	1,483	1,274	877	547	246	90	20	0.5	0.4							
	8.48	12,143	3,741	2,742	1,820	1,188	1,016	479	189	134	22	7									
	8.74	28,027	5,739	2,784	1,914	1,343	524	624	145	92	38	2									
	6.24	28,940	2,933	1,794	737	489	180	162	88	2	8	0.02									
	6.75	11,973	1,654	1,322	724	588	385	164	64	37	17	3									
	7.25	1,185	356	215	108	88	28	22	6	6	1										
	7.76	423	212	128	63	41	9	3	1												
	8.27	771	233	166	88	89	24	7	10												
	8.52	242	350	156	145	83	36	13	6												
	8.78	2,390	229	153	100	44	31	15	1												
	9.28	4,115	831	329	134	33	38	11		2		0.02	0.4								
	9.53	1,255	389	339	202	123	84	25	8	2	0.4										
	9.79	1,074	328	306	135	110	87	35	12	6	1	4	0.02								
	10.58	892	223	148	107	41	32	15	1	4	0.08	1		1							
	10.80	771	270	140	138	47	28	8	7	1	0.6										
	11.31	559	215	134	102	72	42	18	14	3	0.4	0.8									
	11.56	514	180	74	34	14	8	2		4											
	11.81	1,074	188	141	60	32	9	4													
	12.32	984	156	81	16	11	2	1	1												
	12.58	378	188	107	71	33	48	1	2												
	12.83	898	97	101	83	44	27	8	4			0.5	0.02								
	13.33	728	173	109	82	47	10	22	2												
	13.59	741	181	85	24	11	8														
	13.84	847	95	80	25	10	8	1	1		0.9	0.2									
	14.35	1,089	119	48	39	8	1	3													
	14.60	801	188	87	12	10	2	1	1	1		0.8									
	14.88	1,684	148	120	53	18	6	1	3	2											
	15.38	968	78	48	55	9	3	5													
	15.61	720	172	152	41	42	32	4	1		4	0.02	0.4								
YAG 39-	12.83	387	94	39	21	10	13														
C-20 ZU	14.03	1,224	220	75	10	4	3	1				0.1	1	0.02							
	14.28	428	253	147	70	18	21	4													
	15.28	91	57	11	17	10	9	3	1												
	15.78	551	151	85	33	18	3	5			0.5	0.04	0.4								
	16.03	153	123	79	31	14	6														
	16.28	398	85	64	30	14	1														
	22.18	91	82	70	9	14	4		0.4		0.4										
	24.17	260	148	48	53	10	1	2	0.5	0.4											
	26.18	76	87	37	8	2		2													
	29.83	995	288	70	58	10	11	2				0.5	0.1								
YFNB 13-	0.13	1,899	416	271	131	78	38	21	7	2	0.4										
E-57 ZU	0.88	4,088	982	885	488	358	399	158	104	89	27	11	18	16	2	1	3			0.07	
	1.13	18,492	1,638	997	641	389	269	308	94	124	71	55	28	9	10	3				0.04	
	1.63	6,031	1,904	973	528	328	189	143	84	82	74	31	18	7	3	0.2				0.09	
	1.88	2,939	843	575	278	123	128	94	21	19	13	16	18	5	4					0.2	
	2.43	1,729	555	312	85	22	15	7	1	3	4	4	2	8	4						
	3.38	1,071	288	168	99	19	50	39	20	7	0.1	0.4	0.04	0.4							
	4.63	1,117	81	27	11	10	5														
	5.13	338	181	83	23	23	2	4													
	5.88	352	113	18	17	8		4													
	6.38	820	88	48	34	19	5	4	4												
	6.88	873	190	86	42	9	2	1													
	7.38	1,309	373	329	89	80	20	12	0.8	0.4	2										
	7.88	1,574	573	120	41	14	18	7	2	1											
	8.88	841	598	188	84	81	7	8													
	9.18	878	188	88	21	4		2	2	0.02											

TABLE B.5 CONTINUED

Station	Mean Collection Time (TSD)	Number of Particles/ft ³ /hr/micron-interval																			
		Mean Particle Size, microns																			
		52.5	72.5	92.5	112.5	132.5	155	195	235	275	315	365	485	605	725	845	1,000	1,400	1,800	2,200	2,600
hr																					
Shot Zuni																					
	9.88	857	126	68	27	8	4		2												
	10.38	352	90	3	5	5	1														
	11.88	949	152	53	14	13	11	10													
	12.13	780	109	27	27	15	8		0.4	0.4		0.5	0.02								
	12.38	719	214	114	33	23	7	5	7	.1											
	12.63	1,056	333	177	39	35	7	3	2												
YFNB 29-	0.20	21,899	2,193	915	590	360	154	111	20												
G-71 ZU.	0.40	6,394	1,450	1,143	315	429	82	63	35		3	0.1									
	0.59	728	141	94	35	18	15	33	2	0.2	2	0.07	0.08	0.2							
	0.80	14,251	1,102	589	271	133	158	18	7	2			1	7	3	3	1	1		0.04	
	0.99	4,950	3,581	1,561	1,008	720	253	237	104	49	21	53	42	40	3	0.01	3	1		0.04	
	1.20	8,112	2,524	728	318	205	89	67	32	0.8	22	6	26	7	18	4	0.03	0.02			
	1.24	15,421	2,393	788	767	248	222	145	74	9	0.04	29	72	56	14	6	1	8		0.04	
	1.36	12,745	1,734	720	464	412	87	59	122	64	39	65	33	13	2						
	1.60	20,426	753	678	313	109	90	34	54	29	17	47	18	10		0.01					
	1.87	10,770	3,784	1,113	654	374	129	205	10	30	57	8	9	10	3	0.1	0.3	0.3			
	1.78	6,029	1,337	1,135	438	176	86	81	44	2	23	33	8	4		0.9					
	1.84	52,072	30,301	17,978	9,110	3,683	2,261	1,188	593	207	182	83	80	14	9	8					
Shot Tewa																					
YAG 40-	5.14	292	1,179	448	219	133	65	46	16	14	0.1										
B-7 TE	5.64	1,073	1,846	981	386	224	109	109	33	22	1	0.8									
	6.64	984	752	551	358	188	104	65	26	13	4										
	7.14	1,141	1,094	660	339	218	112	71	25	18	2										
	8.14	1,004	518	317	243	108	79	34	14												
	8.64	230	572	525	353	218	107	35	25	1	7	1	0.1								
	9.64	1,715	836	404	225	169	105	38	6	1											
	10.14	1,108	564	290	157	90	43	18	7	1	1										
	11.14	1,078	240	145	68	53	11	13	2	1	1										
	11.64	310	263	196	99	83	34	10	10	3											
	12.64	441	316	174	106	78	55	13	3	1	0.1	0.7	0.4								
	13.14	616	218	111	34	8	9		1	1											
	14.14	837	230	94	21	18	15														
	14.64	312	256	93	98	30	11	1													
	15.64	292	124	113	90	13	10	2		1					0.4	0.02					
	16.14	220	128	43	27	4	2														
	17.14	518	225	114	58	6	9	3		6	0.9										
	17.64	514	244	130	28	24	9	2	2	1											
YAG 39-	3.14	1,904	528	324	165	86	49	57	21	90	61	20	4	0.6							
C-20 TE	4.14	6,405	2,623	1,857	1,148	1,165	793	550	375	225	122	13	1								
	4.64	716	1,909	1,574	968	900	580	468	247	142	47	4	0.01	0.7	0.03						
	6.16	1,280	314	151	96	66	31	11	21	1	3										
LST 611-	11.78	364	611	264	54	44	7	7													
D-41 TE	15.78	267	95	50			1														
	16.58	210	49	34	10																
	17.38	58	126	93	36		5	1													
	17.78	77	180	107	32	43	30	2													
YFNB 29-	1.88	1,236	940	453	219	146	455	92	49	58	54	64	25	10	1	1					
H-78 TE	3.88	2,927	343	251	128	72	74	68	86	123	87	62	45	7	0.03						
	4.12	450	187	81	7	39	44	88	83	67	15	1	0.04	0.8							

TABLE B.6 CALCULATED RATE OF MASS DEPOSITION, SUPPLEMENTARY DATA, SHOTS ZUNI AND TEWA

Station	Mean Collection Time (T±D) hr	Number of Particles/N ³ /hr/micron-interval																		μg./N ³ -hr (52.5 to 2,600 μ ³)				
		52.5	72.5	92.5	112.5	132.5	152	175	200	225	250	275	315	365	435	605	725	845	1,000		1,400	1,800	2,200	2,600
Shot Zuni																								
YAG 40- B-7 ZU	3.49	1,062	365	310	160	136	78	136	62	339	85	49	124											62.845
	3.74	126	67	69	31	63	46	272	321	290	156	360	660	30	326	1								172.285
	4.47	466	339	364	466	666	996	2,709	4,010	6,167	8,402	2,744	332											1,181.535
	5.23	2,330	2,695	3,814	3,960	4,264	5,061	6,292	8,786	6,330	2,491	1,361	72	110										1,677.820
	5.48	2,174	1,762	2,079	2,279	2,448	4,071	4,392	3,040	2,450	872	656												834.716
	5.74	4,659	2,704	2,721	2,247	2,843	2,414	8,722	2,334	2,267	1,392	181	1											894.770
	6.24	4,643	1,362	1,780	1,290	1,361	629	1,486	1,411	141	225	24												309.070
	6.78	2,143	779	1,292	1,275	1,426	1,060	1,500	1,025	710	690	200												348.655
	7.25	208	160	211	181	296	121	290	192	161	76	6												47.510
	7.78	74	100	125	111	119	48	94	32															14.603
	8.27	136	110	162	166	172	111	72	172	10														26.730
	8.52	43	166	163	288	182	166	184	99	2														31.293
	8.78	428	160	180	170	186	148	141	27	23	16													28.860
	9.26	737	251	322	237	96	179	192	11	82			1	64										45.085
	9.52	225	184	222	257	365	307	222	130	71	19													61.073
	9.79	192	185	260	229	317	311	222	205	164	86	296	3											85.205
	10.55	160	108	142	168	119	160	129	30	2	167	4	19	27										42.425
	10.80	120	120	120	220	120	110	74	121	26	2													27.510
	11.31	100	101	121	160	209	190	177	222	90	19	50												46.870
	11.56	82	88	73	60	42	22	22	1	124	3													13.113
	11.81	192	70	120	106	92	43	48																16.982
	12.32	174	74	79	29	25	12	16	20	1														8.423
	12.58	60	96	105	126	96	210	16	22	10														10.060
	12.83	128	66	99	93	127	125	86	76	2			31	3										21.830
	13.23	136	82	167	109	126	47	204	26															20.765
	13.59	123	76	64	42	22	27																	7.430
	13.84	122	46	59	44	36	20			17	20	10	26	18										11.940
	14.35	195	86	66	70	24	6	26	1															7.300
	14.60	144	78	66	22	26	11	18	21	22	86													12.588
	14.88	296	70	110	92	47	21	16	61	71	2													16.700
	15.26	172	27	42	26	17	48																	7.700
	15.61	129	81	149	72	122	147	44	20	13	10	1	62											25.215
YAG 30- C-20 ZU																								
	12.82	66	46	36	27	29	61	2																6.413
	14.02	219	104	72	19	12	14	11				11	196	5										32.790
	14.28	77	119	144	124	66	98	46	1															13.992
	15.28	16	27	12	21	26	42	26	19															6.323
	15.78	89	71	82	69	46	16	22	5			22	6	122										27.225
	16.02	27	66	77	66	42	29																	6.163
	16.28	71	40	62	6	42	1	12																2.625
	22.18	16	30	69	16	42	19	4	7															8.085
	24.18	47	79	66	94	26	6	27	9	11	10													9.380
	26.18	14	22	26	16	7	19	1																2.425
	29.92	176	126	69	99	29	62	22				22	2											16.295
YFNB 13- E-67 ZU																								
	0.12	204	196	266	222	292	177	194	117	71	16													44.245
	0.68	722	462	650	825	1,021	1,020	1,420	1,672	1,787	1,071	679	2,291	4,666	1,200	1,292	2,092							2,722.720
	1.12	2,952	780	928	1,164	1,220	1,240	2,000	1,610	2,264	2,779	2,342	2,946	2,646	6,622	2,550	62							2,425.900
	1.62	1,680	897	961	846	929	872	1,219	1,022	1,800	2,091	1,861	2,216	2,190	1,672	169	110							1,246.650
	1.88	826	296	362	489	260	690	806	241	469	230	975	2,677	1,469	1,960	1,262	266							1,171.840
	2.62	216	262	266	186	66	69	67	20	62	170	246	210	222										149.025
	3.28	192	126	164	178	86	224	260	229	189	6		64	13	212									88.026
	4.62	200	26	27	21	26	24																	4.290
	5.12	60	71	62	41	67	12	42																7.240
	5.88	82	62	16	21	28	46	1																4.960
	6.28	92	46	66	61	67	24	62	78	7														10.220
	6.88	121	96	86	76	10	11	11																6.705
	7.28	216	176	224	122	146	66	116	8	11	79	6												27.722

TABLE B.4 CONTINUED

Station	Mass Collector Time (TSD)	Number of Particles/ft ³ /hr/micro-interval																µg/m ³ -h. (0.2.5 to 2,000 µ)			
		52.5	72.5	90.5	112.5	132.5	150	190	230	275	315	360	400	600	725	845	1,000		1,400	1,800	2,200
Shut Zwei																					
	7.00	282	150	117	74	42	50	60	42	34											10,648
	8.00	151	138	150	60	90	35	35	1												12,825
	9.10	121	66	38	90	13	14	5	40	36	3										25,320
	9.50	153	57	67	98	10	22		33												7,140
	10.30	65	43	4	10	14	6	4													2,730
	11.00	170	73	62	26	29	22	66													10,135
	12.12	140	82	27	48	48	30	7	7	11											12,205
	12.30	129	101	712	50	60	36	47	122	3											15,600
	12.52	160	157	176	89	93	32	30	60												15,150
Shut Town																					
YFMB 29- G-71 ZU	0.20	2,020	1,023	806	1,020	1,057	700	1,010	223	1											187,810
	0.50	1,145	642	1,117	828	1,290	424	522	264	184											183,005
	0.30	130	66	92	62	84	70	31	40	6											25,245
	0.60	2,251	919	370	470	304	710	160	110	75											1,630,015
	0.90	806	1,007	1,520	1,776	2,071	1,188	2,170	1,471	1,270	812	2,226	2,043	11,102	1,814	0	4,724	4,200	317		6,001,670
	1.20	1,452	1,752	712	601	682	450	622	817	32	601	401	2,670	2,104	6,574	2,420	400	893			3,025,353
	1.24	2,700	1,127	771	1,320	714	1,021	1,320	242	3	1,702	10,190	4,000	2,887	1,101	10,328	150				5,605,205
	1.26	2,201	817	704	817	1,108	440	642	1,971	1,604	1,527	2,911	4,764	2,600	1,121						2,046,065
	1.60	2,892	265	663	881	312	410	310	860	745	604	2,520	3,120	2,920	6						920,955
	1.67	1,928	1,773	1,008	700	1,077	594	1,000	172	767	2,218	524	1,200	2,940	1,600	127	427	1,074			2,054,283
	1.70	1,979	620	1,109	771	606	264	744	707	76	604	2,411	1,220	2,200	447						701,200
	1.66	0,321	14,272	17,000	10,025	10,620	10,401	10,000	0,616	0,241	7,047	4,000	11,270	2,001	4,220	6,770					6,417,163
YAG 40- D-7 TE	5.14	121	555	430	206	202	300	420	200	203	5										92,670
	5.04	182	870	950	601	647	812	1,000	544	576	80	49									160,290
	6.04	176	254	320	320	465	400	500	500	80	200	6,06									100,420
	7.10	204	816	645	397	620	617	624	416	422	88										183,416
	8.14	190	242	210	420	310	200	220	227	3											62,400
	8.04	41	270	513	658	627	494	471	400	81	204	117	10								170,320
	8.04	207	294	294	207	456	404	204	90	22											73,090
	10.14	190	266	283	270	260	190	174	122	47	73										40,085
	11.14	192	112	142	121	151	82	120	27	10	80										24,600
	11.04	50	124	192	274	260	180	181	174	80											11,641
	12.04	79	150	170	227	227	254	120	66	21	4	46	20								47,540
	12.14	110	102	100	61	26	61	88	2	3	48										14,665
	14.14	150	100	82	30	52	71	1													10,470
	14.04	66	121	81	174	89	66	16	31												13,205
	15.04	52	50	111	180	30	60	30	6	60											43,170
	16.14	30	80	42	60	13	18	6													6,170
	17.14	83	104	111	104	10	44	20	5	170	30										18,730
	17.04	82	116	120	51	70	46	20	26	22	3										14,000
YAG 30- C-20 TE	3.14	241	249	317	291	240	220	327	247	1,092	2,262	1,202	693	177	1						485,420
	4.14	1,147	1,235	1,813	2,021	2,350	2,440	2,042	8,017	8,787	4,743	787	21								1,241,825
	4.04	126	900	1,620	1,705	2,589	2,678	4,222	2,061	2,664	1,020	297	1	200	17						919,060
	6.14	229	146	148	120	182	142	100	220	26	142	1									49,860
LBT 611- D-41 TE	11.78	65	200	261	90	120	37	72	1												20,625
	12.78	40	45	46	1		9	1													3,095
	16.50	30	22	23	10																2,065
	17.30	10	60	92	64	2	23	17													5,785
	17.78	14	85	105	87	124	142	21													13,890
YFMB 29- H-70 TE	1.00	221	442	442	206	412	200	260	700	1,500	2,116	2,001	2,650	2,777	677	102					1,565,215
	3.00	524	182	245	220	209	241	612	1,203	2,178	2,204	6,464	1,824	18							1,041,873
	6.12	81	80	70	14	112	200	610	1,244	1,727	600	71	6	246							223,660

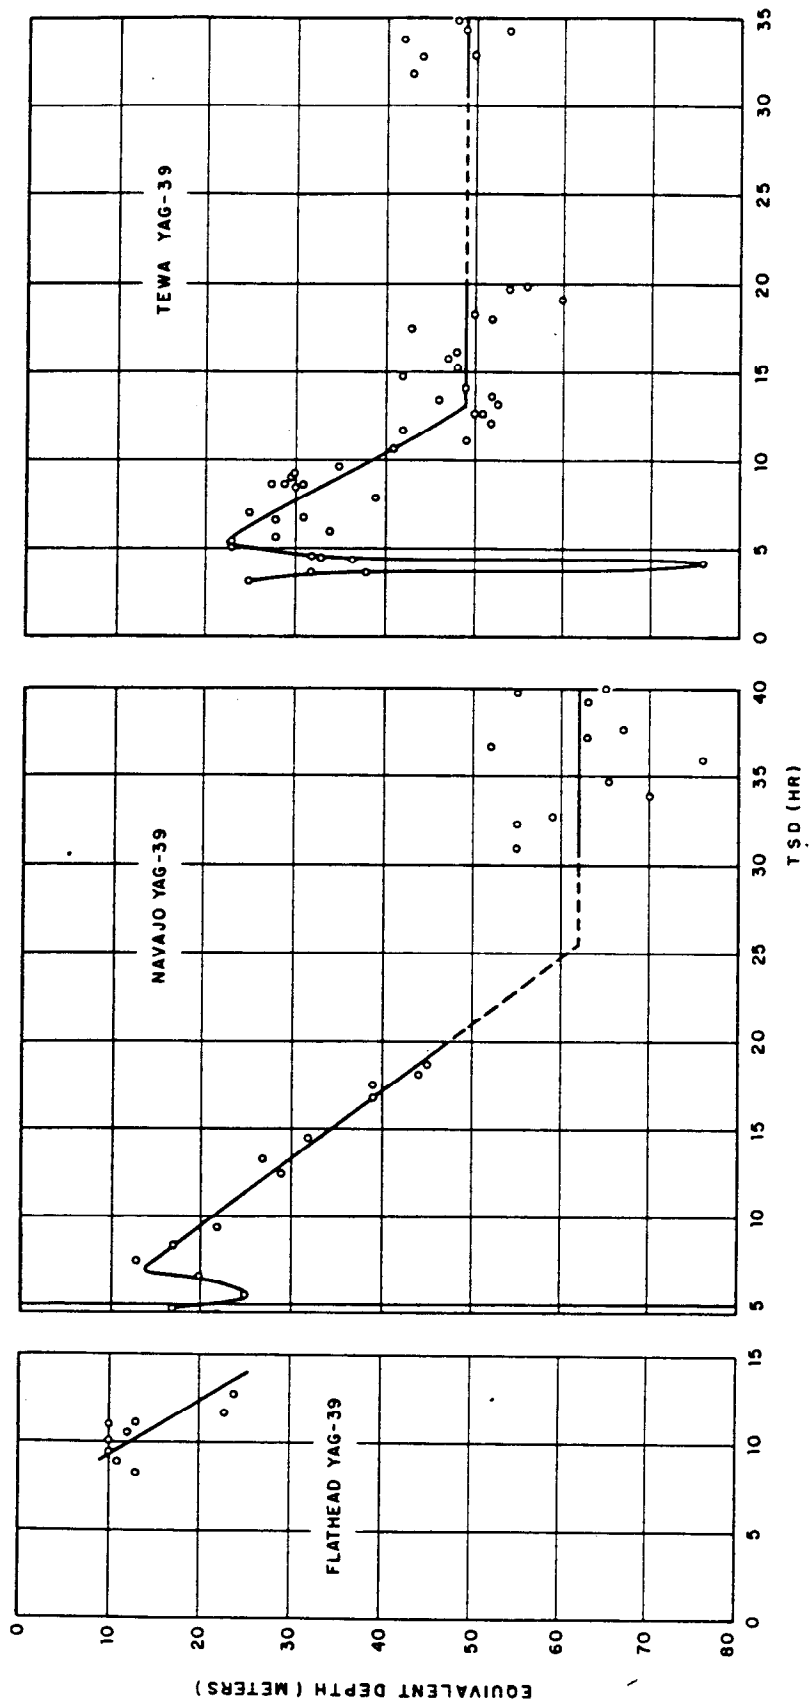


Figure B.1 Ocean-penetration rates, Shots Flathead, Navajo, and Tewa.

**B.2 PHYSICAL, CHEMICAL, AND
RADIOLOGICAL DATA**

TABLE B.8 WEIGHT, ACTIVITY, AND FISSION VALUES FOR SIZED FRACTIONS FROM WHIM SAMPLE YFNB 29 ZU

Size Range	Weight		CIC Assay *			Fissions	
	Grams	Percent of Total	Value at H + 262 hr	Percent of Total	Specific Activity	Total	Per Gram
microns			10^{-8} ma		10^{-8} ma/gm	10^{14}	10^{14}
1,000	37.70	41.8	1.08	15.8	0.0286	21.	0.56
500 to 1,000	41.91	46.4	3.14	46.0	0.0749	60.	1.4
250 to 500	4.97	5.5	1.35	19.8	0.272	26.	5.2
100 to 250	3.51	3.9	0.734	10.7	0.209	14.	4.0
50 to 100	0.80	0.9	0.155	2.3	0.194	3.0	3.8
50	1.38	1.5	0.371	5.4	0.269	7.1	5.1
Total	90.27		6.83		0.0757	131.	1.5

* Response to 100 μ g of Ra = 588×10^{-8} ma

209

PAGE 208 DELETED

TABLE B.9 FREQUENCIES AND ACTIVITY CHARACTERISTICS OF PARTICLE SIZE AND PARTICLE TYPE GROUPS, SHOTS ZUNI AND TEWA

Size Group	Composite			Angular		Spherical		Agglomerates		
	Number of Particles	Activity		Frequency	Median Activity	Frequency	Median Activity	Frequency	Median Activity	
microns		Minimum	Maximum							
		well counts/min			well counts/min		well counts/min		well counts/min	
YAG 40, Shot Zuni (nonrandom sample)										
Activities in well counts/min at H+12 hours										
31 to 42	8	78	11,354	6	1,255	2	387	0	—	
43 to 60	20	33	833,600	13	6,797	5	6,631	2	423,448	
61 to 84	37	58	459,321	27	11,871	10	17,450	0	—	
85 to 102	6	4,460	50,808	6	32,434	0	—	0	—	
103 to 120	42	69	525,449	24	25,083	12	87,795	6	56,728	
121 to 145	13	19,063	683,362	4	24,771	8	304,282	1	58,585	
146 to 170	34	3,686	771,326	12	65,067	15	259,931	7	114,803	
171 to 200	24	3,816	1,675,122	13	92,070	11	457,315	0	—	
201 to 240	27	25,565	1,310,318	22	152,710	2	420,669	3	221,828	
241 to 260	25	32,178	726,969	22	131,935	0	—	3	217,674	
261 to 315	9	53,105	493,500	6	181,658	0	—	3	365,685	
316 to 382	1	—	—	1	1,774,146	0	—	0	—	

Size Group	Composite			Group	Angular		Spherical			Agglomerates			
	Number of Particles	Activity			Frequency	Median Activity	Frequency	Activity		Frequency	Activity		
microns		Minimum	Maximum					Group		Group	Group		
		well counts/min				well counts/min			well counts/min		well counts/min		
YAG 40, Shot Tewa													
Activities in well counts/min at H+300 hours													
11 to 33	5	0	3,222	372	4,209	4	218	987	1	3,222	3,222	0	—
34 to 66	28	0	80,483	1,596	191,972	17	1,860	169,221	3	3,424	9,532	8	1,125
67 to 99	49	0	47,181	7,103	518,360	24	8,293	241,291	11	14,778	194,762	14	4,111
100 to 132	61	0	48,757	15,129	998,547	38	16,889	685,795	8	8,932	66,648	15	13,504
133 to 165	78	4	53,806	17,243	1,564,034	40	15,247	678,500	8	10,827	88,475	30	26,224
166 to 198	46	0	387,897	25,877	1,628,637	30	24,503	803,776	4	3,757	30,261	12	37,363
199 to 231	19	19	99,094	34,435	693,709	12	34,078	402,758	0	—	—	7	34,591
232 to 264	16	94	136,203	49,444	849,701	4	34,571	125,221	0	—	—	12	53,599
265 to 297	10	8	122,553	55,708	599,034	2	43,855	87,709	1	8	8	7	72,695
298 to 330	14	19	155,625	55,282	928,556	2	63,499	126,985	0	—	—	12	55,282
331 to 363	1	—	—	64,086	64,086	0	—	—	0	—	—	1	64,086
364 to 396	2	3,176	138,856	71,016	142,032	0	—	—	1	3,176	3,176	1	138,856
397 to 429	0	—	—	—	—	—	—	—	—	—	—	—	—
430 to 462	3	1,267	39,308	10,997	51,572	2	6,132	12,264	1	39,308	39,308	0	—
463 to 495	0	—	—	—	—	—	—	—	—	—	—	—	—
496 to 528	2	92,686	197,740	145,214	290,428	0	—	—	0	—	—	2	145,214
Total	334				8,523,877	175		3,334,607	38		435,392	121	
Contribution, pct							52.4		39.1	11.4		5.1	36.2
													55.8

TABLE B.9 CONTINUED

Size Group	Number of Particles	Composite					Angular			Spherical			Agglomerates		
		Frequency with Zero Activity	Activity				Frequency	Activity		Frequency	Activity		Frequency	Activity	
			Minimum	Maximum	Median	Group		Median	Group		Median	Group		Median	Group
microns			well counts/min					well counts/min			well counts/min			well counts/min	
YAG 39, Shot Tewa															
Activities in well counts/min at H+300 hours															
10 to 21	20	7	0	232	18	1,161	5	0	57	15	61	1,104	0	—	—
22 to 30	51	19	0	477	14	3,115	34	11	1,532	16	68	1,563	1	0	0
31 to 42	59	27	0	872	16	5,263	45	9	3,554	3	0	307	11	22	1,402
43 to 60	63	17	0	5,461	54	12,481	31	64	1,335	3	469	9,913	29	27	1,233
61 to 84	49	8	0	2,180	64	11,992	29	61	5,666	0	—	—	20	64	6,326
85 to 120	41	4	0	8,994	317	80,647	25	543	48,395	1	739	739	15	98	31,513
121 to 170	9	1	0	15,755	494	32,430	6	676	16,170	1	494	494	2	7,883	15,766
171 to 240	5	0	1,958	27,120	16,402	80,525	2	10,757	21,514	1	27,120	27,120	2	15,946	31,891
241 to 340	3	0	5,658	76,906	34,344	166,908	3	34,344	116,908	0	—	—	0	—	—
341 to 480	0	—	—	—	—	—	—	—	—	—	—	—	—	—	—
481 to 680	0	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	300					344,522	180		215,131	40		41,260	80		88,131
Contribution, pct							60.0		62.4	13.4		12.0	26.7		25.6
LST 611, Shot Tewa															
Activities in well counts/min at H+300 hours															
10 to 21	39	18	0	161	19	1,897	22	13	1,017	17	19	860	0	—	—
22 to 30	23	10	0	212	11	939	22	24	929	1	10	10	0	—	—
31 to 42	32	12	0	343	41	2,269	27	44	1,820	3	29	106	2	172	343
43 to 60	26	13	0	1,112	10	2,436	20	19	2,261	4	0	116	2	29	57
61 to 84	12	2	0	7,909	108	14,161	7	198	9,598	1	128	128	4	53	4,435
85 to 120	14	3	0	11,941	1,994	47,417	8	4,201	35,755	1	3,282	3,282	5	0	8,380
121 to 170	20	3	0	17,640	8,899	176,014	14	11,323	150,672	0	—	—	6	883	25,342
171 to 240	6	1	0	39,681	11,438	82,752	5	8,798	68,472	0	—	—	1	14,280	14,280
241 to 340	0	—	—	—	—	—	—	—	—	—	—	—	—	—	—
341 to 480	0	—	—	—	—	—	—	—	—	—	—	—	—	—	—
481 to 680	0	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	172					327,885	125		270,524	27		4,524	20		52,837
Contribution, pct							72.7		82.5	16.7		1.4	11.6		16.1

TABLE B.9 CONTINUED

Size Group	Number of Particles	Frequency with Zero Activity	Composite				Angular			Spherical			Agglomerates			
			Activity				Frequency	Activity		Frequency	Activity		Frequency	Activity		
			Minimum	Maximum	Median	Group		Median	Group		Median	Group		Median	Group	
microns			well counts/min				well counts/min			well counts/min			well counts/min			
YFNB 13, Shot Tewa																
Activities in well counts/min at H+300 hours																
10 to 21	27	8	0	250	33	1,488	19	35	868	8	29	620	0	—	—	
22 to 30	54	22	0	399	25	3,014	38	24	1,933	16	38	1,081	0	—	—	
31 to 42	28	7	0	356	87	2,820	25	91	2,775	2	23	45	1	0	0	
43 to 60	19	3	0	1,226	74	2,707	15	74	2,345	0	—	—	4	87	362	
61 to 84	8	2	0	1,186	83	1,612	8	83	446	0	—	—	2	583	1,166	
85 to 120	11	4	0	2,424	125	5,618	6	135	963	1	0	0	4	1,116	4,655	
121 to 170	2	0	78	7,126	3,602	7,204	1	78	78	0	—	—	1	7,126	7,126	
171 to 240	1	1	—	—	0	0	0	—	—	0	—	—	1	0	0	
241 to 340	0	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
341 to 480	2	0	792,378	984,808	868,592	1,777,183	2	888,592	1,777,183	0	—	—	0	—	—	
481 to 680	1	1	—	—	0	0	0	—	—	1	0	0	0	—	—	
Total	153					1,801,646	114		1,786,591	27		1,746	12		13,309	
Contribution, pct							74.6		99.2	17.6		0.1	7.8		0.7	
YFNB 29, Shot Tewa																
Activities in well counts/min at H+300 hours																
10 to 21	33	6	0	506	48	2,514	20	44	1,683	13	70	841	0	—	—	
22 to 30	18	9	0	610	13	1,299	15	0	1,107	3	60	192	0	—	—	
31 to 42	19	5	0	534	62	1,853	16	53	1,487	0	—	—	3	84	368	
43 to 60	22	4	0	395,842	490	408,345	18	167	404,211	1	9	9	6	848	4,125	
61 to 84	12	2	0	5,554	272	11,149	8	272	8,493	1	927	927	3	88	1,729	
85 to 120	16	0	90	7,801	926	37,525	7	785	20,133	4	554	4,472	5	1,625	12,920	
121 to 170	12	1	0	83,316	2,029	118,296	6	1,433	93,965	0	—	—	6	2,421	24,331	
171 to 240	8	1	0	21,240	6,186	55,892	3	6,590	19,723	1	21,240	21,240	4	2,728	14,919	
241 to 340	9	0	3,614	619,448	61,653	1,445,691	6	112,640	720,292	1	61,653	61,653	2	331,873	663,746	
341 to 480	13	0	8,204	1,698,631	71,445	3,265,945	9	142,176	2,918,445	3	71,446	341,296	1	6,204	6,204	
481 to 680	7	0	50,641	489,310	184,800	1,610,536	5	184,800	1,086,799	0	—	—	2	261,869	523,737	
Total	169					6,959,045	110		5,276,338	27		430,630	32		1,252,077	
Contribution, pct							65.1		78.8	16.0		6.0	18.9		18.0	

TABLE B.10 SURVEY OF SHOT TEWA REAGENT FILMS FOR SLURRY PARTICLE TRACES *

Station and Instrument	Number of Reagent Film Examined †	Serial Number of Tray Having Slurry Particles	Number of Slurry Particles	
			Definite	Doubtful
YAG 40-A-1	10	—	0	0
YAG 40-A-2	7	3006 2988		4 2
YAG 40-B-7	28	—	0	0
YAG 39-C-20	27	3930 3931 3927 3924	5 3 1	
YAG 39-C-24	27	3721 3727		2 4
YAG 39-C-33	27	3828 3829		‡ ‡
LST 611-D-37	27	3211 3224 3231		1 1 1
LST 611-D-41	27	3394 3393 3401	1 1	
LST 611-D-50	12	—	0	0
YFNB 29-G-71	5	3433		~57§
YFNB 29-H-78	0	—	—	—
YFNB 13-E-57	5	—	0	0
How F-64	17	—	0	0
Totals	219	17	11	73

* Private communication from N. H. Farlow.

† Every reagent film in each IC examined.

‡ Covered with contaminated rain.

§ Primarily splashes.

TABLE B. 11 TOTAL ACTIVITY AND MASS OF SLURRY FALLOUT

Collecting Station	Shot Flathead			Shot Navajo		
	Total	Total Mass	Total Number	Total	Total Mass	Total Number
	Activity *	NaCl	Droplets	Activity *	NaCl	Droplets
	(counts/min)/ft ² × 10 ⁸	μg/ft ²	number/ft ²	(counts/min)/ft ² × 10 ⁸	μg/ft ²	number/ft ²
YFNB 13-E-57	†	—	—	51.0	125,000	16,000
YFNB 29-H-78	45.9	10,700	178,000	3.6	9,000	1,150
YAG 39-C-20	8.4	300	714	21.2	13,200	1,740
YAG 39-C-24	1.6	57	135	†	—	—
LST 611-D-37	19.6	690	1,640	†	—	—
LST 611-D-50	2.6	92	219	†	—	—
YAG 40-A-1	13.1	460	489	9.2	4,400	15,000
YAG 40-A-2	11.5	410	436	†	—	—
YAG 40-B-7	6.5	230	460	†	—	—

* Photon count in well counter at H+12 hours.

† Values unavailable due to instrument malfunction or incomplete sampling run.

TABLE B.12 GAMMA ACTIVITY AND FISSION CONTENT OF OCC AND AOC₁ COLLECTORS BY Mo⁹⁹ ANALYSIS
(AREA = 2.60 ft²)

The activities listed are for the unopened, covered collector on the floor of the doghouse counter. Fission values determined by radiochemical analysis are underlined; corresponding total fissions are corrected for recovery loss. All other fission values are computed from the derived ratio fission/doghouse counts/min at 100 hr (see Table B.13). In most cases the observed ratio for a given platform is used for the other collectors on that platform. For the YFNB 29, the ratio used is based on the average of the two independent fission values reported. How F Flathead is computed from the average ratio obtained from all other Flathead platforms.

Collector Designator	Shot Zuni			Shot Flathead		
	Doghouse Activity at 100 hrs counts/min	Recovered Number of Fissions	Total Fissions	Doghouse Activity at 100 hrs counts/min	Recovered Number of Fissions	Total Fissions
YAG 40-B- 4	433,600 *	—	7.38×10^{13}	421,500	5.29×10^{13}	7.56×10^{13}
- 5	4,538,900	—	7.73×10^{14}	84,480	—	1.52×10^{13}
- 6	7,458,800	1.27×10^{15}	1.27×10^{15}	35,200	—	6.31×10^{12}
-17	5,868,700	—	9.99×10^{14}	34,140	—	6.12×10^{12}
-18	2,833,200	—	4.82×10^{14}	101,900	—	1.83×10^{13}
-19	4,047,400	—	6.89×10^{14}	439,650	—	7.89×10^{13}
YAG 39-C-21	87,300	8.26×10^{12}	8.26×10^{12}	82,100	1.27×10^{13}	1.37×10^{13}
-22	35,560	—	3.36×10^{12}	31,400	—	5.24×10^{12}
-23	35,560	—	3.36×10^{12}	17,820	—	2.97×10^{12}
-34	34,400	—	3.25×10^{12}	50,270	—	8.39×10^{12}
-35	64,180	—	6.07×10^{12}	92,430	—	1.54×10^{13}
-36	132,120	—	1.25×10^{13}	106,130	—	1.77×10^{13}
LST 611-D-38				73,120	—	1.74×10^{13}
-39				13,576	—	3.22×10^{12}
-40				11,580 *	2.09×10^{12}	2.75×10^{12}
-51				21,840 *	—	5.19×10^{12}
-52				136,490	—	3.24×10^{13}
-53				241,150 *	—	5.73×10^{13}
YFNB 13-E-54	2,805,200	7.95×10^{14}	7.95×10^{14}	4,962,300	9.52×10^{14}	1.05×10^{15}
-55	3,305,800	—	9.37×10^{14}	5,596,600	—	1.18×10^{15}
-56	4,656,000	—	1.32×10^{15}	6,890,600	—	1.46×10^{15}
-58	1,780,900 *	—	5.05×10^{14}	5,880,700	—	1.24×10^{15}
-59	3,073,000	—	8.71×10^{14}	7,364,000	—	1.56×10^{15}
-60	4,004,200	—	1.13×10^{15}	4,978,600	—	1.05×10^{15}
How F-61	2,081,000	5.01×10^{14}	5.01×10^{14}	686	—	1.26×10^{11}
-62	2,361,000	—	5.68×10^{14}	1,107	—	2.10×10^{11}
-63	2,877,000	—	6.92×10^{14}	1,443	—	2.74×10^{11}
-65	2,229,000	—	5.37×10^{14}	603	—	1.14×10^{11}
-66	2,064,000	—	4.97×10^{14}	604	—	1.15×10^{11}
-67	1,776,000	—	4.27×10^{14}	620	—	1.18×10^{11}
YFNB 29-G-68	4,320,000	1.19×10^{15}	1.19×10^{15}	219,800	3.47×10^{13}	3.81×10^{13}
-69	4,419,600	—	1.20×10^{15}	266,900	—	4.84×10^{13}
-70	5,881,700	—	1.60×10^{15}	303,550	—	5.50×10^{13}
-72	5,283,600	—	1.44×10^{15}	272,450	—	4.94×10^{13}
-73	4,054,000	—	1.10×10^{15}	233,760	—	4.24×10^{13}
-74	4,884,800	—	1.33×10^{15} †	230,400	—	4.17×10^{13}
YFNB 29-H-75	5,732,200	1.39×10^{15}	1.54×10^{15}	316,600	4.79×10^{13}	5.99×10^{13}
-76	7,476,800	—	2.03×10^{15}	271,700	—	4.93×10^{13}
-77	8,889,000	—	2.42×10^{15}	302,880	—	5.49×10^{13}
-79	7,476,800	—	2.03×10^{15}	298,560	—	5.41×10^{13}
-80	6,180,800	—	1.88×10^{15}	309,500	—	5.61×10^{13}
-81	5,615,900	—	1.53×10^{15}	247,680	—	4.49×10^{13}
Standard cloud	83,000	—	9.84×10^{12}	164,000	—	2.79×10^{13}

NO FALLOUT;
COLLECTORS NOT EXPOSED

TABLE B.12 CONTINUED

Collector Designator	Shot Navajo			Shot Tewa	
	Doghouse Activity at 100 hrs counts/min	Recovered Number of Fissions	Total Fissions	Doghouse Activity at 100 hrs counts/min	Total Fissions †
YAG 40-B- 4	85,800	1.72×10^{13}	1.91×10^{13}	13,383,300	1.95×10^{15}
- 5	67,080	—	1.49×10^{13}	4,504,700	6.56×10^{14}
- 6	52,260	—	1.16×10^{13}	3,743,200	5.45×10^{14}
-17	54,990	—	1.22×10^{13}	4,958,600	7.22×10^{14}
-18	69,615	—	1.55×10^{13}	3,846,800	5.60×10^{14}
-19	80,145	—	1.78×10^{13}	13,879,700	2.02×10^{15}
YAG 39-C-21	191,760	3.90×10^{13}	4.48×10^{13}	23,623,200	4.54×10^{15}
-22	149,600	—	3.49×10^{13}	5,754,700	1.11×10^{15}
-23	117,640	—	2.75×10^{13}	6,306,500	1.21×10^{15}
-34	129,200	—	3.02×10^{13}	6,192,200	1.19×10^{15}
-35	176,700	—	4.13×10^{13}	9,091,900	1.75×10^{15}
-36	205,360	—	4.80×10^{13}	27,328,300	5.25×10^{15}
LST 611-D-38	16,860	3.03×10^{12}	3.74×10^{12}	1,337,000	2.44×10^{14}
-39	18,130	—	4.02×10^{12}	810,900	1.48×10^{14}
-40	9,016	—	2.00×10^{12}	962,800	1.76×10^{14}
-51	8,722	—	1.93×10^{12}	1,259,000	2.30×10^{14}
-52	17,836	—	3.96×10^{12}	1,336,500	2.44×10^{14}
-53	19,600	—	4.35×10^{12}	1,830,400	3.34×10^{14}
YFNB 13-E-54	727,600	—	1.46×10^{14}	2,584,300	5.95×10^{16}
-55	476,000	—	9.58×10^{13}	3,616,300	8.32×10^{16}
-56	804,640	1.30×10^{14}	1.62×10^{14}	5,740,900	1.32×10^{16}
-58	806,070	—	1.62×10^{14}	4,180,400	9.62×10^{16}
-59	714,000	—	1.44×10^{14}	2,149,100	4.95×10^{16}
-60	675,240	—	1.36×10^{14}	2,447,800	5.63×10^{16}
How F-61	16,110	3.04×10^{12}	3.62×10^{12}	255,940	6.56×10^{13}
-62	18,820	—	4.23×10^{12}	275,000	7.05×10^{13}
-63	18,980	—	4.26×10^{12}	331,570	8.5×10^{13}
-65	18,440	—	4.14×10^{12}	251,790	6.45×10^{13}
-66	15,890	—	3.57×10^{12}	214,470	5.50×10^{13}
-67	15,130	—	3.40×10^{12}	238,140	6.10×10^{13}
YFNB 29-G-68	8,330	—	2.06×10^{12}	17,914,700	3.61×10^{15}
-69	9,500	—	2.35×10^{12}	‡	—
-70	11,370	—	2.81×10^{12}	32,654,400	6.26×10^{15}
-72	10,880	—	2.69×10^{12}	37,489,100	7.18×10^{15}
-73	5,292 *	—	1.31×10^{12}	18,895,700	3.62×10^{15}
-74	10,090	—	2.50×10^{12}	18,678,100	$3.58 \times 10^{15} ¶$
YFNB 29-H-75	13,130	2.60×10^{12}	3.10×10^{12}	37,371,900	6.79×10^{15}
-76	7,546 *	—	1.87×10^{12}	46,094,000	9.41×10^{15}
-77	14,110	3.10×10^{12}	3.65×10^{12}	64,372,000	1.23×10^{16}
-79	16,660	—	4.12×10^{12}	61,366,400	1.18×10^{16}
-80	17,050	—	4.22×10^{12}	45,756,700	8.77×10^{15}
-81	11,560	—	2.86×10^{12}	37,853,100	7.25×10^{15}
Standard Cloud	16,900	—	3.46×10^{12}	315,000	4.71×10^{13}

* Imperfect collection for quantity/area; hexcell and/or liner lost.

† Independent value by UCRL: 1.38×10^{15}

‡ All recoveries > 96 percent. No correction made.

§ Absurd value excluded.

¶ Independent value by UCRL: 4.15×10^{15}

TABLE B. 13 OBSERVED DOGHOUSE GAMMA ACTIVITY-FISSION CONTENT RELATIONSHIP

Collector Designator	Fissions (Mo^{99})/Doghouse counts/min at 100 hour $\times 10^8$			
	Zuni	Flathead	Navajo	Tewa
YAG 40-B-4	—	1.794	2.226	1.457
-6	1.703	—	—	—
YAG 39-C-21	0.946	1.669	2.336	1.922
LST 611-D-38	—	—	2.218	1.825
-40	—	2.375	—	—
YFNB 13-E-54	2.834	2.116	—	2.302
-56	—	—	2.013	—
How F-61	2.407	—	2.247	2.563
YFNB 29-G-68	2.755	1.733	—	2.015
H-75	2.687	1.892	2.361	1.817
-77	—	—	2.587	—
Standard Cloud *	1.186	1.701	2.047	1.495
Mean and σ (pct)	2.07 \pm 37.9	1.90 \pm 13.7	2.25 \pm 8.07	1.92 \pm 19.5

* This sample was a point source. To compare with extended sources, cloud sample activities should be decreased ~7 percent, raising the reported ratio a corresponding amount.

TABLE B.14 DIP-COUNTER ACTIVITY AND FISSION CONTENT OF AOC₂ COLLECTORS (AREA = 0.244 ft²)
I. SHOTS FLATHEAD AND NAVAJO

The fallout samples from each of these events were relatively unfractionated allowing activities of all samples from Flathead and Navajo to be converted directly to fissions by a constant factor; 1.01×10^6 and 1.24×10^8 fission/dip counts/min at 100 hr, respectively. Details may be found in Table B.15. The AOC₂ collections (complete sample or aliquot thereof) were made up to a standard volume of 2 liters for counting.

Collector Location	Shot Flathead		Shot Navajo	
	Dip Activity at 100 hr counts/min	Total Fissions	Dip Activity at 100 hr counts/min	Total Fissions
Skiff AA	1.36×10^7 *	1.37×10^{13}	1.65×10^6	2.05×10^{12}
BB	2.21×10^7	2.23×10^{13}	1.12×10^6	1.39×10^{12}
CC	4.81×10^6	4.86×10^{12}	6.28×10^5	7.79×10^{11}
DD	6.08×10^4	6.14×10^{10}	7.55×10^5	9.36×10^{11}
EE	4.81×10^3	4.86×10^9	4.99×10^5	6.19×10^{11}
FF	7.07×10^4	7.14×10^{10}	2.11×10^5	2.62×10^{11}
HH	1.27×10^7	1.28×10^{13}	4.98×10^5	6.18×10^{12}
KK	9.10×10^4 †	9.19×10^{10}	2.87×10^5	3.56×10^{12}
LL	7.95×10^4	8.03×10^{10}	6.12×10^5	7.59×10^{11}
MM	‡		2.89×10^5	3.58×10^{12}
PP	3.20×10^8	3.23×10^{13}	1.74×10^7	2.16×10^{13}
RR	1.78×10^5	1.80×10^{11}	1.54×10^5	1.91×10^{12}
SS	3.77×10^4	3.81×10^{10}	—	—
TT	1.00×10^3	1.01×10^9	5.95×10^5	7.38×10^{11}
UU	6.03×10^4	6.09×10^{10}	—	—
Raft 1-P-85	1.09×10^4	1.10×10^{10}	1.78×10^5	2.21×10^{11}
2-R-86	6.41×10^6	6.47×10^{12}	9.23×10^5	1.14×10^{12}
3-S-87	1.33×10^6	1.34×10^{12}	9.04×10^5	1.12×10^{12}
How K-82	5.22×10^3	5.27×10^9	5.26×10^4	6.52×10^{10}
George L-83	5.16×10^7	5.21×10^{13}	1.26×10^7 §	1.56×10^{13}
William M-84	8.74×10^3	8.83×10^9	—	—
Charlie M-84	—	—	9.70×10^6	1.20×10^{13}

TABLE B.14 CONTINUED
II. SHOTS ZUNI AND TEWA.

Because of fractionation in each of these events, the dip activity observed at 100 hours was first converted to doghouse activity at 100 hours (a constant relation for any sample as shown in Table B.15) in order to utilize the fission relations of Table B.13. Values of the latter relation for locations other than shown were estimated by proximity in location and/or time of arrival.

Collector Location	Shot Zuni					Shot Tewa				
	Dip Activity	Doghouse Activity	Equivalent Doghouse Activity	Fission Doghouse counts/min	Total Fissions	Dip Activity	Doghouse Activity	Equivalent Doghouse Activity	Fissions Doghouse counts/min	Total Fissions
	at 100 hr	Dip Activity at 100 hr	at 100 hr	at 100 hr		at 100 hr	at 100 hr	at 100 hr	at 100 hr	
	counts/min		counts/min	$\times 10^8$		counts/min		counts/min	$\times 10^8$	
Skiff AA	†	5.568×10^{-3}			—	1.91×10^7 *	5.568×10^{-3}	1.09×10^8	1.46	1.59×10^{13}
BB	3.74×10^7 †		2.08×10^6	1.64	3.41×10^{13}	7.32×10^7		4.08×10^8	1.92	7.83×10^{13}
CC	4.28×10^8 †		2.38×10^6	1.75	4.17×10^{12}	7.59×10^8		4.23×10^8	1.92	8.12×10^{12}
DD	1.72×10^7 †		9.58×10^4	1.79	1.71×10^{13}	1.68×10^8		9.35×10^2	2.43	2.27×10^{11}
EE	3.38×10^8		1.88×10^4	1.65	3.10×10^{12}	2.58×10^4		1.44×10^2	2.43	3.50×10^{10}
FF	2.00×10^3 *		1.11×10^1	1.43	1.59×10^9	8.90×10^3		4.96×10^1	2.43	1.21×10^{10}
GG	2.02×10^1 *		1.12×10^6	1.91	2.14×10^{13}	9.64×10^7		5.37×10^6	1.92	1.03×10^{14}
HH	2.46×10^8 †		1.37×10^4	1.95	2.67×10^{12}	8.06×10^7		4.49×10^6	1.92	8.62×10^{13}
KK	2.24×10^8 *		1.25×10^4	1.91	2.39×10^{12}	8.80×10^4		4.90×10^2	2.43	1.19×10^{11}
LL	1.09×10^8		6.07×10^2	1.58	9.59×10^{10}	1.99×10^4		1.11×10^2	2.43	2.70×10^{10}
MM	8.82×10^5 †		4.91×10^3	1.77	8.69×10^{11}	1.89×10^8		1.05×10^6	1.46	1.54×10^{14}
PP	—		—	—	—	9.33×10^7		5.19×10^6	1.92	9.96×10^{13}
RR	3.84×10^5 †		2.14×10^3	1.97	4.22×10^{11}	8.50×10^8		4.73×10^3	2.43	1.15×10^{12}
SS	1.60×10^5 *		8.91×10^2	1.65	1.47×10^{11}	—		—	—	—
TT	3.71×10^5		2.07×10^3	1.40	2.90×10^{11}	6.58×10^4		3.66×10^2	2.43	8.89×10^{10}
UU	1.40×10^3 †		7.80×10^2	1.75	1.37×10^{11}	—		—	—	—
WW	—		—	—	—	2.96×10^8		1.65×10^6	1.92	3.17×10^{14}
XX	—		—	—	—	8.26×10^7		4.60×10^6	1.46	6.72×10^{13}
YY	—		—	—	—	6.35×10^7		3.54×10^6	1.46	5.17×10^{13}
Raft 1-P-85	5.58×10^7		3.11×10^6	2.67	8.30×10^{13}	1.68×10^7		9.35×10^4	2.43	2.27×10^{13}
2-R-86	1.21×10^8		6.74×10^6	2.67	1.80×10^{14}	1.35×10^7		7.52×10^6	2.43	1.83×10^{14}
3-S-87	7.67×10^7		4.27×10^6	2.67	1.14×10^{14}	2.39×10^8		1.33×10^6	1.92	2.55×10^{14}
How K-82	3.07×10^7		1.71×10^6	2.67	4.57×10^{13}	2.78×10^8		1.54×10^4	2.43	3.74×10^{12}
George L-83	8.17×10^7		4.55×10^6	2.67	1.21×10^{14}	1.84×10^8		1.02×10^6	2.43	2.48×10^{14}
William M-84	3.63×10^7		2.02×10^6	2.67	5.39×10^{13}	—		—	—	—
Charlie M-84	—		—	—	—	1.33×10^8		7.41×10^6	1.92	1.42×10^{14}

* Funnel and hexcell lost.

† Hexcell lost.

‡ Skiff or collector lost.

§ Collector tilted slightly by blast.

TABLE B. 15 DIP PROBE AND DOGHOUSE-COUNTER CORRELATION WITH FISSION CONTENT

The listed dip-counter activities were observed on aliquots of OCC samples and are corrected to an equivalent dip count for the total recovered number of fissions (see Table B. 12).

Sample	Recovered Number of Fissions*	Time of Dip Count H + hr	Dip Activity Corrected to H + 100 hr counts/min	Fissions	Fissions †	Doghouse Act. at 100 hr
				Dip counts/min at 100 hr $\times 10^6$	Doghouse counts/min at 100 hr $\times 10^6$	Dip Act. at 100 hr $\times 10^{-3}$
YAG 40-B-6 ZU	1.27×10^{15}	1,559.4	12.5×10^8	1.02	1.703	5.88
YAG 39-C-21 FL	1.27×10^{13}	217.4	13.7×10^6	0.927	1.669	5.56
	1.27×10^{13}	241.6	13.4×10^6	0.947	1.669	5.68
	1.27×10^{13}	388.1	13.2×10^6	0.962	1.669	5.77
YFNB 13-E-54 FL	9.52×10^{14}	268.2	86.2×10^7	1.10	2.116	5.20
	9.52×10^{14}	335.4	91.4×10^7	1.04	2.116	4.92
	9.52×10^{14}	387.8	90.4×10^7	1.05	2.116	4.96
	9.52×10^{14}	722.7	82.0×10^7	1.16	2.116	5.48
YFNB 29-G-68 FL	3.47×10^{13}	263.8	37.5×10^6	0.925	1.733	5.34
	3.47×10^{13}	388.0	35.2×10^6	0.985	1.733	5.69
	3.47×10^{13}	723.2	33.1×10^6	1.05	1.733	6.06
YAG 39-C-21 NA	3.90×10^{13}	194.7	30.3×10^6	1.29	2.336	5.52
	3.90×10^{13}	239.4	30.4×10^6	1.28	2.336	5.48
YFNB 13-E-56 NA	1.30×10^{14}	194.8	11.1×10^7	1.17	2.013	5.81
	1.30×10^{14}	239.5	11.6×10^7	1.12	2.013	5.56
	1.30×10^{14}	364.4	10.2×10^7	1.27	2.013	6.31
YAG 39-C-21 TE	4.54×10^{15}	287.9	44.4×10^8	1.02	1.922	5.31
	4.54×10^{15}	340.3	44.4×10^8	1.02	1.922	5.31
	4.54×10^{15}	412.2	41.9×10^8	1.08	1.922	5.62
YFNB 13-E-54 TE	5.95×10^{14}	340.1	43.9×10^7	1.36	2.302	5.91
	5.95×10^{14}	412.0	40.5×10^7	1.47	2.302	6.39
Mean and σ						5.608 ± 6.69 pct ‡

* From Table B. 12

† From Table B. 13

‡ The mean reported in Table B. 14 was originally calculated in error. Since the correction amounts to less than 1 pct it was not made.

TABLE B.16 ELEMENTAL ANALYSIS OF DEVICE ENVIRONMENT

The sea water analysis is after Sverdrup (Reference 64), except U which was determined from a Bikini lagoon water sample taken just prior to Tewa. The remaining analyses were made at NRDL for Project 2.6a, Operation Castle (Reference 63), except the Ca and Mg reef values which were estimated from Reference 65.

Element	Fraction by weight				Observed Operational Backgrounds (mg/2.6 ft ²)	
	Sea water	Surface Coral (Zu and Fl)	Reef and Lagoon Floor (Tewa)	Avg. Surface and Lagoon Floor (Na)	Sea Stations	How Island
Ca	0.00040	0.340	0.368	0.354	2.16±0.92	4.15±2.27
Na	0.01056	0.0033	0.0069	0.0051	2.49±0.86	4.12±0.97
K	0.00038	0.00001	0.0003	0.00016	0.42±0.09	0.51±0.11
Cl	0.01898	0.0023	0.0017	0.0020	1.31±0.39	2.67±(?)
Mg	0.00127	0.0260	0.0110	0.0185	1.63±0.33	2.50±1.07
Fe	2×10^{-8}	4.2×10^{-5}	0.0002	0.000121	0.86±0.14	0.65±0.15
U	3×10^{-9}	*	*	*	†	†
Pb	4×10^{-9}	*	*	*	0.96±0.05	0.96±0.05
Cu	8×10^{-9}	1.6×10^{-6}	1.6×10^{-6}	1.6×10^{-6}	0.30±0.09	0.26±0.07

* Not available.

† Not detectable.

Pages 222 thru 231 Deleted.

TABLE B.19 AIR-IONIZATION RATES OF INDUCED PRODUCTS FOR 10^4 FISSIONS/FT², PRODUCT/FISSION RATIO OF UNITY (SC)

Product half life is given directly below the nuclide symbol. Values are in r/hr and the number in parentheses indicates the number of zeros between the decimal point and the first significant figure.

Age	hr	Na ²⁴	Cr ⁵¹	Mn ⁵⁴	Mn ⁵⁶	Fe ⁵⁹	Co ⁶⁰	Co ⁶⁰	Co ⁶⁰	Cu ⁶⁴	Sb ¹²⁵
		15h	27. 2d	304d	2. 58h	45. 2d	?70d	72d	5. 27y	12. 8h	2. 75d
45. 8 minutes	0. 763	(8)250	(12)539	(11)118	(8)547	(10)119	(12)218	(11)598	(12)575	(9)174	(10)740
1. 12 hours	1. 12	(8)246	(12)539	(11)118	(8)496	(10)119	(12)218	(11)598	(12)575	(9)171	(10)737
1. 64	1. 64	(8)240	(12)539	(11)118	(8)432	(10)118	(12)218	(11)598	(12)575	(9)166	(10)735
2. 40	2. 40	(8)232	(12)538	(11)118	(8)352	(10)118	(12)218	(11)598	(12)575	(9)160	(10)727
3. 52	3. 52	(8)220	(12)538	(11)118	(8)261	(10)118	(12)218	(11)597	(12)575	(9)150	(10)719
5. 16	5. 16	(8)204	(12)537	(11)118	(8)167	(10)118	(12)218	(11)597	(12)575	(9)137	(10)707
7. 56	7. 56	(8)182	(12)535	(11)118	(9)878	(10)118	(12)218	(11)597	(12)575	(9)121	(10)689
11. 1	11. 1	(8)155	(12)533	(11)118	(9)341	(10)118	(12)218	(11)596	(12)575	(10)997	(10)666
16. 2	16. 2	(8)123	(12)531	(11)118	(10)865	(10)117	(12)218	(11)594	(12)575	(10)756	(10)630
23. 8	23. 8	(9)867	(12)526	(11)118	(10)112	(10)117	(12)218	(11)592	(12)575	(10)502	(10)581
1. 45 days	34. 8	(9)524	(12)520	(11)118	(12)583	(10)116	(12)217	(11)590	(12)575	(10)277	(10)517
2. 13	51. 1	(9)244	(12)511	(11)118	(14)751	(10)115	(12)217	(11)586	(12)575	(10)115	(10)438
3. 12	74. 9	(10)823	(12)498	(11)118	(16)126	(10)113	(12)217	(11)580	(12)575	(11)319	(10)340
4. 57	109. 7	(10)166	(12)480	(11)117		(10)111	(12)216	(11)572	(12)574	(12)488	(10)236
6. 70	160. 8	(11)156	(12)455	(11)117		(10)107	(12)215	(11)561	(12)574	(13)309	(10)138
9. 82	235. 7	(13)478	(12)420	(11)116		(10)102	(12)213	(11)545	(12)573	(15)554	(11)630
14. 4	345. 6	(15)321	(12)374	(11)115		(11)951	(12)210	(11)521	(12)572	(17)138	(11)198
21. 1	506. 4		(12)315	(11)113		(11)858	(12)207	(11)488	(12)571		(12)366
30. 9	741. 6		(12)246	(11)110		(11)738	(12)202	(11)444	(12)569		(13)310
45. 3	1, 087		(12)170	(11)107		(11)592	(12)194	(11)387	(12)566		(15)637
66. 4	1, 594		(13)994	(11)102		(11)428	(12)184	(11)315	(12)562		(17)399
97. 3	2, 335		(13)452	(12)949		(11)267	(12)170	(11)235	(12)556		
143	3, 432		(13)141	(12)855		(11)132	(12)151	(11)151	(12)547		
208	4, 992		(14)272	(12)738		(12)488	(12)128	(12)808	(12)534		
301	7, 224		(15)252	(12)596		(12)117	(12)101	(12)330	(12)516		

TABLE B.19 CONTINUED

Age		Sb^{124}	Ta^{180}	Ta^{182}	Au^{198}	Pb^{203}	U^{237}	U^{239}	Np^{239}	Np^{240}
	hr	60d	8.15h	114d	2.7d	52h	6.75d	23.5m	56h	7.3m
45.8 minutes	0.783	(10)133	(10)703	(11)513	(10)711	(10)501	(10)126	(9)507	(10)258	(9)290
1.12 hours	1.12	(10)133	(10)684	(11)513	(10)709	(10)500	(10)125	(9)270	(10)300	(9)287
1.64	1.64	(10)133	(10)652	(11)513	(10)704	(10)496	(10)125	(9)107	(10)326	(9)281
2.40	2.40	(10)133	(10)614	(11)513	(10)699	(10)490	(10)125	(10)280	(10)338	(9)270
3.52	3.52	(10)133	(10)557	(11)513	(10)689	(10)484	(10)124	(11)386	(10)337	(9)256
5.16	5.16	(10)132	(10)484	(11)513	(10)677	(10)474	(10)123	(12)212	(10)332	(9)236
7.56	7.56	(10)132	(10)394	(11)513	(10)660	(10)459	(10)122	(14)301	(10)321	(9)210
11.1	11.1	(10)132	(10)292	(11)512	(10)636	(10)437	(10)120	(17)577	(10)308	(9)176
16.2	16.2	(10)132	(10)190	(11)511	(10)603	(10)408	(10)118		(10)289	(9)137
23.8	23.8	(10)131	(11)992	(11)510	(10)554	(10)370	(10)113		(10)263	(10)944
1.45 days	34.8	(10)131	(11)388	(11)509	(10)494	(10)319	(10)108		(10)230	(10)550
2.13	51.1	(10)130	(12)973	(11)507	(10)415	(10)256	(10)101		(10)188	(10)248
3.12	74.9	(10)128	(12)129	(11)504	(10)321	(10)186	(11)914		(10)140	(11)767
4.57	109.7	(10)126	(14)668	(11)499	(10)221	(10)118	(11)789		(11)909	(11)139
6.70	160.8	(10)123	(16)872	(11)493	(10)128	(11)595	(11)634		(11)482	(12)113
9.82	235.7	(10)119	(18)149	(11)484	(11)576	(11)219	(11)458		(11)191	(14)290
14.4	345.6	(10)112		(11)470	(11)178	(12)507	(11)287		(12)491	(16)126
21.1	506.4	(10)104		(11)452	(12)318	(13)594	(11)143		(13)670	
30.9	741.6	(11)929		(11)426	(13)258	(14)259	(12)529		(14)364	
45.3	1,087	(11)786		(11)390	(15)643	(16)256	(12)121		(16)509	
66.4	1,594	(11)616		(11)343	(17)277	(19)304	(13)137		(19)954	
97.3	2,335	(11)431		(11)284	(21)995		(15)578			
143	3,432	(11)254		(11)215			(17)520			
208	4,992	(11)120		(11)145			(20)742			
301	7,224	(12)410		(12)825						

TABLE B. 21 GAMMA-RAY PROPERTIES OF CLOUD AND FALLOUT SAMPLES BASED ON GAMMA-RAY SPECTROMETRY (NRB)

Cloud samples are particulate collections in small pieces of filter paper. All fallout samples are aliquots of OCC sample solutions except those indicated as solid, which are aliquoted undissolved, by weight.

Sample Designation	Age hr	Number of Fissions N_f	Average Energy \bar{E} kev	mr/hr at 3 ft, (SC), for			Total Photons per sec $\times 10^6$	Photons/sec 10^4 fission	
				By Line E	By \bar{E}	Error Using \bar{E} pct			
Shot Cherokee									
Standard cloud sample									
1	53	8.82×10^{12}	294	20.64	21.15	2.47	11.62	1.317	
2	74		299	17.18	17.66	2.79	9.65	1.094	
3	98		310	11.94	12.15	1.76	6.53	0.740	
4	166		337	7.88	8.36	6.09	4.04	0.458	
5	191		379	6.36	6.87	8.02	2.91	0.330	
6	215		391	5.82	6.24	7.22	2.59	0.294	
7	242		417	5.00	5.40	8.00	2.10	0.238	
8	262.5		446	4.44	4.81	8.33	1.75	0.198	
9	335		490	3.46	3.81	10.12	1.26	0.143	
10	405.5		509	2.85	3.10	8.77	0.99	0.112	
11	597.5		626	1.82	1.98	8.79	0.52	0.059	
Shot Zuni									
Standard cloud sample									
1	53	9.84×10^{12}	477	62.47	67.36	7.83	22.98	2.335	
2	69		413	49.92	52.89	5.95	20.82	2.116	
3	93		422	37.90	39.64	4.59	15.28	1.553	
4	117		433	28.45	30.12	5.87	11.31	1.149	
5	192		437	16.71	17.78	6.40	6.62	0.673	
6	242		485	13.05	14.03	7.51	4.71	0.479	
7	454		589	6.28	6.84	8.92	1.90	0.193	
8	790		624	3.29	3.52	6.99	0.93	0.095	
9	1,295		559	1.56	1.65	6.45	0.48	0.049	
How F-61									
1	240	1.00×10^{13}	210	1.72	1.73	0.58	1.34	0.134	
2	460		247	0.64	0.65	1.56	0.43	0.043	
YAG 40-B-19									
2	266	3.71×10^{14}	419	181.18	193.33	6.71	74.98	0.202	
3	362		(solid)	480	110.18	119.14	8.13	40.4	0.109
4	459		508	105.62	113.95	7.89	36.29	0.098	
5	790		606	51.07	54.87	7.44	14.83	0.040	
6	983		731	53.46	56.63	5.93	12.87	0.035	
6'	987		706	49.24	51.89	5.38	12.21	0.033	
7	1,298		710	38.09	40.91	7.40	9.58	0.026	
8	1,728.5		706	28.41	30.05	5.77	7.07	0.019	
9	2,568.5		711	18.85	19.60	3.98	4.60	0.012	
10	2,810		731	14.50	16.02	10.48	3.65	0.010	
How F-67									
1	359	7.29×10^{13}	318	10.66	11.38	6.75	5.82	0.080	
2	460.5		(solid)	385	8.31	8.73	5.05	3.69	0.051
3	981		610	4.38	4.53	3.42	1.20	0.016	
4	1,606		646	3.54	3.64	2.82	0.93	0.013	
YAG 40-B-6									
1	383	5.08×10^{13}	444.76	12.92	13.79	6.73	5.05	0.10	
2	458		457.16	9.43	10.07	6.79	3.58	0.070	
3	982		656.58	4.49	4.76	6.01	1.2	0.024	
4	1,605		695.12	3.47	3.60	3.75	0.86	0.017	

TABLE B. 21 CONTINUED

Sample Designation	Age	Number of Fissions	Average Energy \bar{E}	mr/hr at 3 ft. (SC), for			Total Photons per sec $\times 10^6$	Photons/sec 10^6 fissions
				N_f fissions/ft ²				
	hr	N_f	kev	By Line \bar{E}	By \bar{E}	Error Using \bar{E} pct		
Shot Flathead								
Standard cloud sample								
2	96.5	2.79×10^{13}	335.88	61.12	62.88	2.88	30.49	1.093
3	195	↓	402.04	27.94	29.18	4.44	11.82	0.424
4	262	↓	489.13	18.94	20.36	7.50	6.44	0.231
5	334	↓	535.96	16.31	17.73	8.39	5.39	0.193
6	435	↓	573.61	11.06	12.01	8.59	3.43	0.123
7	718	↓	661.49	6.08	6.56	7.89	1.64	0.059
8	1,031	↓	708.63	3.16	3.42	8.23	0.80	0.029
9	1,558	↓	678.61	2.08	2.21	6.25	0.54	0.019
YAG 39-C-36								
1	119.5	1.06×10^{13} *	306.28	14.77	15.20	2.91	8.08	0.762
2	598	(solid)	532.08	1.99	2.17	9.05	0.65	0.061
YFNB 13-E-56								
1	337	4.44×10^{13}	515.74	13.38	14.52	8.52	4.58	0.103
2	722	(solid)	659.93	5.96	6.38	7.05	1.60	0.036
3	1,032	↓	681.15	3.71	3.95	6.47	0.96	0.022
4	1,538	↓	699.09	1.77	1.85	4.52	0.44	0.010
YFNB 13-E-54								
1	357	3.81×10^{13}	389.11	12.41	13.52	8.94	5.66	0.149
2	720	↓	549.26	5.08	5.51	8.46	1.64	0.043
3	1,034.5	↓	672.88	3.55	3.73	5.07	0.92	0.024
4	1,538.5	↓	662.90	1.94	2.00	3.09	0.50	0.013
Shot Navajo								
Standard cloud sample								
1	51.5	3.46×10^{12}	567.68	20.50	22.97	12.05	6.62	1.913
2	69	↓	483.11	13.32	14.65	9.98	4.94	1.428
3	141	↓	396.37	5.00	5.31	6.70	2.18	0.630
4	191	↓	482.27	4.84	5.18	7.02	1.75	0.506
5	315	↓	604.29	2.13	2.32	8.92	0.63	0.182
6	645.5	↓	585.68	0.72	0.78	8.33	0.22	0.064
YFNB 13-E-54								
1	197	2.40×10^{13}	496.15	9.34	9.96	6.63	3.27	0.136
3	311	(solid)	658.79	8.15	8.74	7.24	2.19	0.091
4	360	↓	710.86	8.36	8.92	6.70	2.09	0.087
5	551	↓	818.31	5.69	6.01	5.62	1.24	0.052
YAG 39-C-36								
1	216	—	436.11	1.92	2.05	6.77	0.76	—
2	260	—	549.03	0.99	1.04	5.05	0.31	—
YFNB 13-E-66								
1	237.5	6.50×10^{12}	518.87	4.40	4.75	7.95	1.49	0.229
2	359	↓	676.86	2.98	3.21	7.72	0.78	0.120
3	551	↓	688.41	1.58	1.70	7.59	0.41	0.063
YAG 39-C-21	309.5	3.90×10^{12}	604.65	1.96	2.10	7.14	0.57	0.146

TABLE B. 21 CONTINUED

Sample Designation	Age	Number of Fissions N_f	Average Energy \bar{E} kev	mr/hr at 3 ft, (SC), for N_f fissions/ft ²			Total Photons per sec $\times 10^6$	Photons/sec 10^6 fission
				By Line E	By \bar{E}	Error Using \bar{E} pct		
Shot Tewa								
Standard cloud sample								
1	71.5	4.71×10^{13}	401.33	127.1	131.64	3.57	53.42	1.134
2	93.5	↓	378.45	94.25	97.60	3.55	42.00	0.892
3	117.0	↓	377.50	75.64	79.29	4.83	34.21	0.726
4	165.0	↓	373.02	62.27	65.71	5.52	28.69	0.609
5	240.5	↓	460.73	44.21	47.38	7.17	16.75	0.356
6	333.5	↓	489.33	24.88	27.01	8.56	8.99	0.191
7	429.0	↓	548.48	18.47	20.16	9.15	6.00	0.127
8	578.5	↓	629.64	12.70	13.83	8.90	3.62	0.077
9	765.5	↓	664.50	10.40	11.18	7.50	2.78	0.059
10	1,269.0	↓	646.80	4.94	5.21	5.47	1.33	0.028
11	1,511.0	↓	656.33	4.13	4.33	4.84	1.09	0.023
YAG 39-C-36								
1	173.0	1.77×10^{13}	345.84	16.78	17.41	3.75	8.2	0.463
2	237.0	(solid)	355.39	12.27	12.81	4.40	5.87	0.332
3	312.0	↓	397.60	7.99	8.42	5.38	3.45	0.195
4	407.0	↓	416.92	5.69	6.04	6.15	2.36	0.133
5	576.0	↓	571.65	3.95	4.22	6.84	1.21	0.068
YFNB 13-E-56								
1	238	3.40×10^{13}	270.06	11.84	12.24	3.38	7.38	0.217
2	335	(solid)	295.56	7.16	7.46	4.19	4.11	0.121
3	413	↓	327.78	4.85	5.07	4.54	2.52	0.074
4	578	↓	434.03	3.82	4.00	4.71	1.50	0.044
5	1,270	↓	542.00	1.64	1.67	1.83	0.50	0.015
6	1,512	↓	563.09	1.16	1.17	0.86	0.34	0.010
Y3-T-1C-D								
	243	—	360.31	1.01	1.06	4.95	0.48	—
YFNB 13-E-54								
1	263	2.38×10^{13}	306.39	6.87	7.21	4.95	3.83	0.161
2	316	↓	330.48	4.61	4.85	5.21	2.39	0.100
3	408.5	↓	373.45	3.49	3.71	6.30	1.62	0.068
4	624.0	↓	484.14	1.76	1.90	7.95	0.64	0.027
YAG 39-C-21								
1	287	1.82×10^{14}	427.26	68.72	73.34	6.72	27.96	0.154
3	411	↓	465.32	40.67	43.65	7.33	15.28	0.084
4	626	↓	564.53	23.70	25.53	7.72	7.40	0.041
5	767	↓	605.21	17.33	18.66	7.67	5.07	0.028
6	1,271	↓	672.61	9.75	10.16	4.21	2.51	0.014
7	1,513	↓	669.95	7.83	8.08	3.19	2.00	0.011

TABLE B. 22 COMPUTED DOGHOUSE DECAY RATES OF FALLOUT AND CLOUD SAMPLES

Activities are computed in units of (counts/sec)/10⁴ fissions for a point source in a covered OCC tray on the floor of the counter. The product/fission ratio for the induced product activities (IP) appears directly below the nuclide symbol. Induced activities are summed and added to the fission product activity (FP) for the total computed count rate. Numbers in parentheses denote the number of zeros between the decimal point and the first significant figure, e. g., (3)291 = 0.000291.

Age	Na ²⁴	Cr ⁵¹	Mn ⁵⁴	Mn ⁵⁴	Fe ⁵⁹	Co ⁵⁷	Co ⁵⁸	Co ⁶⁰	Cu ⁶⁴	Sb ¹²²	Sb ¹²⁴	
hr	0.0109	0.00173	0.011	0.011 *	0.00041	0.0031	0.0036	0.00264	0.0090	0.0252 †	0.0084	
Shot Zuni, Average Lagoon-Area Composition:												
45.8 min	0.763	(6)119	(10)419	(9)175	(6)544	(10)401	(10)921	(9)319	(10)111	(7)356	(7)335	(8)123
1.12 hrs	1.12	(6)117	(10)419	(9)175	(6)494	(10)401	(10)921	(9)319	(10)111	(7)347	(7)335	(8)123
1.64 hrs	1.64	(6)114	(10)419	(9)175	(6)430	(10)401	(10)920	(9)319	(10)111	(7)338	(7)333	(8)123
2.40 hrs	2.40	(6)110	(10)419	(9)175	(6)351	(10)400	(10)920	(9)319	(10)111	(7)326	(7)330	(8)123
3.52 hrs	3.52	(6)105	(10)419	(9)175	(6)260	(10)400	(10)920	(9)318	(10)111	(7)306	(7)328	(8)123
5.16 hrs	5.16	(7)970	(10)417	(9)175	(6)166	(10)400	(10)920	(9)318	(10)111	(7)280	(7)320	(8)123
7.56 hrs	7.56	(7)868	(10)415	(9)175	(7)874	(10)399	(10)920	(9)318	(10)111	(7)246	(7)312	(8)122
11.1 hrs	11.1	(7)738	(10)415	(9)175	(7)340	(10)398	(10)919	(9)318	(10)111	(7)203	(7)302	(8)122
16.2 hrs	16.2	(7)583	(10)412	(9)175	(8)861	(10)397	(10)919	(9)317	(10)111	(7)154	(7)285	(8)122
23.8 hrs	23.8	(7)409	(10)408	(9)175	(8)112	(10)395	(10)919	(9)316	(10)111	(7)103	(7)265	(8)121
1.45 days	34.8	(7)249	(10)405	(9)175	(10)581	(10)392	(10)917	(9)314	(10)111	(8)564	(7)235	(8)121
2.13 days	51.1	(7)117	(10)398	(9)175	(12)748	(10)388	(10)916	(9)312	(10)111	(8)234	(7)199	(8)120
3.12 days	74.9	(8)391	(10)388	(9)174		(10)382	(10)913	(9)309	(10)111	(9)651	(7)154	(8)118
4.57 days	109.7	(9)787	(10)374	(9)174		(10)374	(10)910	(9)305	(10)111	(10)936	(7)107	(8)116
6.70 days	160.8	(10)743	(10)353	(9)173		(10)362	(10)905	(9)299	(10)110	(11)629	(8)625	(8)113
9.82 days	235.7	(11)228	(10)327	(9)172		(10)345	(10)898	(9)290	(10)110	(12)112	(8)285	(8)109
14.4 days	345.6		(10)291	(9)169		(10)321	(10)887	(9)278	(10)110		(9)897	(8)104
21.1 days	506.4		(10)246	(9)167		(10)290	(10)872	(9)260	(10)110		(9)166	(9)958
30.9 days	741.6		(10)190	(9)164		(10)250	(10)851	(9)237	(10)109		(10)141	(9)857
45.3 days	1,087		(10)132	(9)158		(10)200	(10)820	(9)206	(10)109		(12)381	(9)727
66.4 days	1,594		(11)772	(9)151		(10)145	(10)777	(9)168	(10)108			(9)569
97.3 days	2,335		(11)351	(9)141		(11)902	(10)717	(9)125	(10)107			(9)398
143 days	3,432		(11)110	(9)126		(11)447	(10)638	(10)803	(10)105			(9)235
208 days	4,992		(12)211	(8)109		(11)165	(10)540	(10)432	(10)102			(9)111
301 days	7,224		(13)195	(10)882		(12)398	(10)425	(10)176	(11)990			(10)379

TABLE B. 22 CONTINUED

Age	hr	Ta ¹⁸⁰	Ta ¹⁸²	Pb ²⁰³	Sum of FP
		0. 0691 †	0. 0326	0. 050	
Shot Zuni, Average Lagoon-Area Composition					
45. 8 min	0. 763	(6)871	(8)355	(6)170	(4)6034
1. 12 hrs	1. 12	(6)850	(8)355	(6)170	(4)3946
1. 64 hrs	1. 64	(6)808	(8)355	(6)168	(4)2429
2. 40 hrs	2. 40	(6)760	(8)355	(6)167	(4)1469
3. 52 hrs	3. 52	(6)690	(8)355	(6)164	(5)8828
5. 16 hrs	5. 16	(6)599	(8)355	(6)161	(5)5243
7. 56 hrs	7. 56	(6)489	(8)355	(6)156	(5)3248
11. 1 hrs	11. 1	(6)362	(8)355	(6)148	(5)2210
16. 2 hrs	16. 2	(6)235	(8)355	(6)139	(5)1519
23. 8 hrs	23. 8	(6)123	(8)352	(6)126	(6)9903
1. 45 days	34. 8	(7)481	(8)352	(6)108	(6)5959
2. 13 days	51. 1	(7)121	(8)352	(7)870	(6)3336
3. 12 days	74. 9	(8)160	(8)349	(7)635	(6)1879
4. 57 days	109. 7	(10)829	(8)346	(7)400	(6)1133
6. 70 days	160. 8	(11)108	(8)342	(7)202	(7)6834
9. 82 days	235. 7		(8)336	(8)745	(7)4159
14. 4 days	345. 6		(8)326	(8)172	(7)2598
21. 1 days	506. 4		(8)313	(9)202	(7)1749
30. 9 days	741. 6		(8)295	(11)887	(7)1249
45. 3 days	1, 087		(8)270	(13)850	(8)9022
66. 4 days	1, 594		(8)238		(8)6424
97. 3 days	2, 335		(8)197		(8)4413
143 days	3, 432		(8)149		(8)2726
208 days	4, 992		(8)100		(8)1401
301 days	7, 224		(9)570		(9)5868

TABLE B.22 CONTINUED

Age	Na ²⁴	Cr ⁵¹	Mn ⁵⁴	Mn ⁵⁶	Fe ⁵⁹	Co ⁵⁷	Co ⁵⁸	Co ⁶⁰	Cu ⁶⁴	Sb ¹²³	Sb ¹²⁴	
hr	0.0109	0.00173	0.011	0.011*	0.00041	0.0031	0.0036	0.00264	0.0090	0.219	0.073	
Shot Zuni, Cloud Composition:												
45.8 min	0.763	(6)119	(10)419	(9)175	(6)544	(10)401	(10)921	(9)319	(10)111	(7)356	(6)291	(7)107
1.12 hrs	1.12	(6)117	(10)419	(9)175	(6)494	(10)401	(10)921	(9)319	(10)111	(7)347	(6)291	(7)107
1.64 hrs	1.64	(6)114	(10)419	(9)175	(6)430	(10)401	(10)920	(9)319	(10)111	(7)338	(6)289	(7)107
2.40 hrs	2.40	(6)110	(10)419	(9)175	(6)351	(10)400	(10)920	(9)319	(10)111	(7)326	(6)287	(7)107
3.52 hrs	3.52	(6)105	(10)419	(9)175	(6)260	(10)400	(10)920	(9)318	(10)111	(7)306	(6)285	(7)107
5.16 hrs	5.16	(7)970	(10)417	(9)175	(6)166	(10)400	(10)920	(9)318	(10)111	(7)280	(6)278	(7)107
7.56 hrs	7.56	(7)868	(10)415	(9)175	(7)874	(10)399	(10)920	(9)318	(10)111	(7)246	(6)272	(7)106
11.1 hrs	11.1	(7)738	(10)415	(9)175	(7)340	(10)398	(10)919	(9)318	(10)111	(7)203	(6)263	(7)106
16.2 hrs	16.2	(7)583	(10)412	(9)175	(8)861	(10)397	(10)919	(9)317	(10)111	(7)154	(6)247	(7)106
23.8 hrs	23.8	(7)409	(10)408	(9)175	(8)112	(10)395	(10)919	(9)316	(10)111	(7)103	(6)230	(7)105
1.45 days	34.8	(7)249	(10)405	(9)175	(10)581	(10)392	(10)917	(9)314	(10)111	(8)564	(6)204	(7)105
2.13 days	51.1	(7)117	(10)398	(9)175	(12)748	(10)388	(10)916	(9)312	(10)111	(8)234	(6)173	(7)104
3.12 days	74.9	(8)391	(10)388	(9)174		(10)382	(10)913	(9)309	(10)111	(9)651	(6)134	(7)103
4.57 days	109.7	(9)787	(10)374	(9)174		(10)374	(10)910	(9)305	(10)111	(10)936	(7)931	(7)101
6.70 days	160.8	(10)743	(10)353	(9)173		(10)362	(10)905	(9)299	(10)110	(11)629	(7)543	(8)985
9.82 days	235.7	(11)228	(10)327	(9)172		(10)345	(10)898	(9)290	(10)110	(12)112	(7)247	(8)949
14.4 days	345.6		(10)291	(9)169		(10)321	(10)887	(9)278	(10)110		(8)780	(8)905
21.1 days	506.4		(10)246	(9)167		(10)290	(10)872	(9)260	(10)110		(8)144	(8)832
30.9 days	741.6		(10)190	(9)164		(10)250	(10)851	(9)237	(10)109		(9)122	(8)745
45.3 days	1,087		(10)132	(9)158		(10)200	(10)820	(9)206	(10)109		(11)331	(8)631
66.4 days	1,594		(11)772	(9)151		(10)145	(10)777	(9)168	(10)108		(13)162	(8)494
97.3 days	2,335		(11)351	(9)141		(11)902	(10)717	(9)125	(10)107			(8)346
143 days	3,432		(11)110	(9)126		(11)447	(10)638	(10)803	(10)105			(8)204
208 days	4,992		(12)211	(9)109		(11)165	(10)540	(10)432	(10)102			(9)964
301 days	7,224		(13)195	(10)882		(12)396	(10)425	(10)176	(11)990			(9)329

TABLE B. 22 CONTINUED

Age		Ta ¹⁸⁰	Ta ¹⁸²	PL ²⁰³	Sum of FP
hr		0. 0411	0. 0194	0. 050	
Shot Zuni, Cloud Composition:					
45.8 min	0. 763	(6)518	(8)211	(6)170	(3)1658
1. 12 hrs	1. 12	(6)506	(8)211	(6)170	(3)1068
1. 64 hrs	1. 64	(6)481	(8)211	(6)168	(4)6723
2. 40 hrs	2. 40	(6)452	(8)211	(6)167	(4)4223
3. 52 hrs	3. 52	(6)411	(8)211	(6)164	(4)2706
5. 16 hrs	5. 16	(6)356	(8)211	(6)161	(4)1788
7. 56 hrs	7. 56	(6)291	(8)211	(6)156	(4)1221
11. 1 hrs	11. 1	(6)215	(8)211	(6)148	(5)8454
16. 2 hrs	16. 2	(6)140	(8)211	(6)139	(5)5677
23. 8 hrs	23. 8	(7)732	(8)210	(6)126	(5)3650
1. 45 days	34. 8	(7)286	(8)210	(6)108	(5)2302
2. 13 days	51. 1	(8)719	(8)210	(7)870	(5)1428
3. 12 days	74. 9	(9)949	(8)208	(7)635	(6)8938
4. 57 days	109. 7	(10)493	(8)206	(7)400	(6)5891
6. 70 days	160. 8	(12)641	(8)204	(7)202	(6)3971
9. 82 days	235. 7		(8)200	(8)745	(6)2667
14. 4 days	345. 6		(8)194	(8)172	(6)1728
21. 1 days	506. 4		(8)186	(9)202	(6)1073
30. 9 days	741. 6		(8)175	(11)880	(7)6306
45. 3 days	1, 087		(8)161	(13)850	(7)3421
66. 4 days	1, 594		(8)141		(7)1734
97. 3 days	2, 335		(8)117		(8)9067
143 days	3, 432		(9)889		(8)1954
208 days	4, 992		(9)596		(8)2502
301 days	7, 224		(9)340		(8)1114

TABLE B.22 CONTINUED

Age		Na ²⁴	Cr ⁵¹	Nm ⁵⁴	Nm ⁵⁸	Fe ⁵⁹	Co ⁵⁷	Co ⁵⁸	Co ⁶⁰	Cu ⁶⁴	Ta ¹⁸⁰
hr		0.0314	0.0120	0.10	0.094	0.0033	0.00224	0.00193	0.0087	0.0278	0.0384
Shot Navajo, Average Fallout Composition:											
45.8 min	0.763	(6)342	(9)290	(8)159	(5)465	(9)322	(10)665	(9)171	(10)364	(6)110	(6)479
1.12 hrs	1.12	(6)336	(9)290	(8)159	(5)422	(9)322	(10)665	(9)171	(10)364	(6)107	(6)467
1.64 hrs	1.64	(6)330	(9)290	(8)159	(5)368	(9)322	(10)665	(9)171	(10)364	(6)104	(6)445
2.40 hrs	2.40	(6)317	(9)290	(8)159	(5)300	(9)322	(10)665	(9)171	(10)364	(6)101	(6)418
3.52 hrs	3.52	(6)301	(9)290	(8)159	(5)222	(9)322	(10)665	(9)171	(10)364	(7)945	(6)380
5.16 hrs	5.16	(6)279	(9)289	(8)159	(5)142	(9)322	(10)665	(9)171	(10)364	(7)865	(6)329
7.56 hrs	7.56	(6)250	(9)288	(8)159	(6)747	(9)321	(10)665	(9)170	(10)364	(7)759	(6)269
11.1 hrs	11.1	(6)213	(9)288	(8)159	(6)290	(9)320	(10)664	(9)170	(10)364	(7)628	(6)199
16.2 hrs	16.2	(6)168	(9)286	(8)159	(7)736	(9)319	(10)664	(9)170	(10)364	(7)475	(6)129
23.8 hrs	23.8	(6)118	(9)283	(8)159	(8)959	(9)318	(10)664	(9)169	(10)364	(7)317	(7)676
1.45 days	34.8	(7)716	(9)281	(8)159	(9)496	(9)316	(10)663	(9)168	(10)364	(7)174	(7)264
2.13 days	51.1	(7)336	(9)276	(8)159	(11)639	(9)313	(10)662	(9)167	(10)364	(8)723	(8)665
3.12 days	74.9	(7)113	(9)269	(8)158		(9)308	(10)660	(9)166	(10)364	(8)201	(9)878
4.57 days	109.7	(8)227	(9)259	(8)158		(9)301	(10)658	(9)163	(10)364	(9)289	(10)456
6.70 days	160.8	(9)214	(9)245	(8)157		(9)291	(10)654	(9)160	(10)363	(10)194	(12)593
9.82 days	235.7	(11)656	(9)227	(8)156		(9)278	(10)649	(9)156	(10)363	(12)348	
14.4 days	345.6		(9)202	(8)154		(9)259	(10)641	(9)149	(10)362		
21.1 days	506.4		(9)170	(8)152		(9)233	(10)630	(9)140	(10)361		
30.9 days	741.6		(9)132	(8)149		(9)201	(10)615	(9)127	(10)360		
45.3 days	1,087		(10)918	(8)144		(9)161	(10)592	(9)111	(10)358		
66.4 days	1,594		(10)535	(8)137		(9)116	(10)561	(10)901	(10)355		
97.3 days	2,335		(10)244	(8)128		(10)726	(10)518	(10)670	(10)351		
143 days	3,432		(11)760	(8)115		(10)360	(10)461	(10)430	(10)345		
208 days	4,992		(11)146	(9)992		(10)133	(10)390	(10)232	(10)338		
301 days	7,224		(12)136	(9)802		(11)319	(10)307	(11)942	(10)326		

TABLE B.22 CONTINUED

Age		Ta ¹⁸²	Pb ²⁰³	
hr		0.038	0.0993	Sum of FP
Shot Navajo, Average Fallout Composition:				
45.8 min	0.763	(8)414	(6)644	(3)1171
1.12 hrs	1.12	(8)414	(6)642	(4)7727
1.64 hrs	1.64	(8)414	(6)636	(4)4870
2.40 hrs	2.40	(8)414	(6)631	(4)3015
3.52 hrs	3.52	(8)414	(6)621	(4)1868
5.16 hrs	5.16	(8)414	(6)608	(4)1175
7.56 hrs	7.56	(8)414	(6)598	(5)7600
11.1 hrs	11.1	(8)414	(6)560	(5)5065
16.2 hrs	16.2	(8)414	(6)524	(5)3337
23.8 hrs	23.8	(8)410	(6)475	(5)2124
1.45 days	34.8	(8)410	(6)408	(5)1326
2.13 days	51.1	(8)410	(6)329	(6)8054
3.12 days	74.9	(8)407	(6)239	(6)4914
4.57 days	109.7	(8)403	(6)151	(6)3154
6.70 days	160.8	(8)399	(7)762	(6)2061
9.82 days	235.7	(8)391	(7)281	(6)1353
14.4 days	345.6	(8)380	(8)652	(7)8691
21.1 days	506.4	(8)365	(9)762	(7)5473
30.9 days	741.6	(8)344	(10)332	(7)3355
45.3 days	1,087	(8)315		(7)1968
66.4 days	1,594	(8)277		(7)1126
97.3 days	2,335	(8)229		(8)6652
143 days	3,432	(8)174		(8)3877
208 days	4,992	(8)117		(8)1989
301 days	7,224	(9)665		(9)8710

TABLE B.22 CONTINUED

Age
hr

Shot Flathead, Average Fallout Composition:

45.8 min	0.763
1.12 hrs	1.12
1.64 hrs	1.64
2.40 hrs	2.40
3.52 hrs	3.52
5.16 hrs	5.16
7.56 hrs	7.56
11.1 hrs	11.1
16.2 hrs	16.2
23.8 hrs	23.8
1.45 days	34.8
2.13 days	51.1
3.12 days	74.9
4.57 days	109.7
6.70 days	160.8
9.82 days	235.7
14.4 days	345.6
21.1 days	506.4
30.9 days	741.6
45.3 days	1,087
66.4 days	1,594
97.3 days	2,335
143 days	3,432
208 days	4,992
301 days	7,224

Na ²⁴	Cu ⁶⁴	Co ⁵⁷	Co ⁵⁸
0.00145	0.00217	0.0036	0.0053

Na ²⁴	Cu ⁶⁴	Co ⁵⁷	Co ⁵⁸	Sum of FP
(7)158	(8)857	(9)107	(9)470	(3)1171
(7)155	(8)838	(9)107	(9)470	(4)7727
(7)152	(8)814	(9)107	(9)469	(4)4870
(7)146	(8)786	(9)107	(9)469	(4)3015
(7)139	(8)738	(9)107	(9)469	(4)1868
(7)129	(8)675	(9)107	(9)469	(4)1175
(7)115	(8)592	(9)107	(9)468	(5)7600
(8)982	(8)490	(9)107	(9)467	(5)5065
(8)776	(8)371	(9)107	(9)466	(5)3337
(8)544	(8)247	(9)107	(9)465	(5)2124
(8)331	(8)136	(9)107	(9)463	(5)1326
(8)155	(9)564	(9)106	(9)460	(6)8054
(9)521	(9)157	(9)106	(9)455	(6)4914
(9)105	(10)226	(9)106	(9)449	(6)3154
(11)989	(11)152	(9)105	(9)440	(6)2061
(12)303	(13)271	(9)104	(9)427	(6)1353
		(9)103	(9)409	(7)8691
		(9)101	(9)383	(7)5473
		(10)988	(9)349	(7)3355
		(10)952	(9)304	(7)1968
		(10)902	(9)248	(7)1126
		(10)833	(9)184	(8)6652
		(10)741	(9)118	(8)3877
		(10)627	(10)636	(8)1989
		(10)494	(10)259	(9)8710

TABLE B.22 CONTINUED

Age		Na ²⁴	Cr ⁵¹	Mn ⁵⁴	Fe ⁵⁹	Co ⁵⁷	Co ⁵⁸	Co ⁶⁰	Cu ⁶⁴	Ta ¹⁸²
hr		(2)284	(3)297	(3)53	(3)167	(3)182	(3)289	(3)81	(2)228	(2)6
Shot Tewa, Average Lagoon-Area Composition:										
45.8 min	0.763	(7)310	(11)719	(11)843	(10)163	(11)541	(10)256	(11)339	(9)901	(9)654
1.12 hrs	1.12	(7)304	(11)719	(11)843	(10)163	(11)541	(10)256	(11)339	(8)880	(9)654
1.64 hrs	1.64	(7)298	(11)719	(11)843	(10)163	(11)540	(10)256	(11)339	(8)855	(9)654
2.40 hrs	2.40	(7)287	(11)719	(11)843	(10)163	(11)540	(10)256	(11)339	(8)825	(9)654
3.52 hrs	3.52	(7)273	(11)719	(11)843	(10)163	(11)540	(10)255	(11)339	(8)775	(9)654
5.16 hrs	5.16	(7)253	(11)716	(11)843	(10)163	(11)540	(10)255	(11)339	(8)709	(9)654
7.56 hrs	7.56	(7)226	(11)713	(11)843	(10)162	(11)540	(10)255	(11)339	(8)622	(9)654
11.1 hrs	11.1	(7)192	(11)713	(11)843	(10)162	(11)540	(10)255	(11)339	(8)515	(9)654
16.2 hrs	16.2	(7)152	(11)707	(11)843	(10)162	(11)540	(10)254	(11)339	(8)390	(9)654
23.8 hrs	23.8	(7)106	(11)701	(11)843	(10)161	(11)539	(10)253	(11)339	(8)260	(9)648
1.45 days	34.8	(8)648	(11)695	(11)843	(10)160	(11)539	(10)252	(11)339	(8)143	(9)648
2.13 days	51.1	(8)304	(11)683	(11)843	(10)158	(11)538	(10)251	(11)339	(9)593	(9)648
3.12 days	74.9	(8)102	(11)665	(11)837	(10)156	(11)536	(10)248	(11)339	(9)165	(9)642
4.57 days	109.7	(9)205	(11)642	(11)837	(10)152	(11)534	(10)245	(11)339	(10)237	(9)636
6.70 days	160.8	(10)194	(11)606	(11)832	(10)147	(11)531	(10)240	(11)338	(11)159	(9)630
9.82 days	235.7	(12)594	(11)561	(11)827	(10)140	(11)527	(10)233	(11)338	(13)285	(9)618
14.4 days	345.6		(11)499	(11)816	(10)131	(11)521	(10)223	(11)337		(9)600
21.1 days	506.4		(11)422	(11)806	(10)118	(11)512	(10)209	(11)336		(9)576
30.9 days	741.6		(11)327	(11)790	(10)102	(11)499	(10)190	(11)335		(9)542
45.3 days	1,087		(11)227	(11)763	(11)815	(11)481	(10)166	(11)333		(9)497
66.4 days	1,594		(11)132	(11)726	(11)590	(11)456	(10)135	(11)330		(9)437
97.3 days	2,335		(12)603	(11)678	(11)367	(11)421	(10)100	(11)327		(9)362
143 days	3,432		(12)188	(11)610	(11)182	(11)374	(11)644	(11)322		(9)275
208 days	4,992		(13)362	(11)526	(12)673	(11)317	(11)347	(11)314		(9)184
301 days	7,224		(14)336	(11)425	(12)161	(11)250	(11)141	(11)304		(9)105

TABLE B. 22 CONTINUED

	Age	Pb ²⁰³	Sum of FP
	hr	(4)178	
Shot Tewa, Average Lagoon-Area Composition:			
45.8 min	0.763	(10)607	(4)6035
1.12 hrs	1.12	(10)605	(4)3947
1.64 hrs	1.64	(10)600	(4)2430
2.40 hrs	2.40	(10)594	(4)1470
3.52 hrs	3.52	(10)586	(5)8831
5.16 hrs	5.16	(10)573	(5)5246
7.56 hrs	7.56	(10)555	(5)3252
11.1 hrs	11.1	(10)529	(5)2214
16.2 hrs	16.2	(10)495	(5)1524
23.8 hrs	23.8	(10)449	(6)9968
1.45 days	34.8	(10)386	(6)6037
2.13 days	51.1	(10)310	(6)3427
3.12 days	74.9	(10)226	(6)1983
4.57 days	109.7	(10)142	(6)1243
6.70 days	160.8	(11)719	(7)7919
9.82 days	235.7	(11)265	(7)5126
14.4 days	345.6	(12)614	(7)3366
21.1 days	506.4	(13)719	(7)2287
30.9 days	741.6	(14)313	(7)1566
45.3 days	1,087		(7)1048
66.4 days	1,594		(8)6888
97.3 days	2,335		(8)4499
143 days	3,432		(8)2734
208 days	4,992		(8)1401
301 days	7,224		(9)5868

TABLE B.22 CONTINUED

Age		Na ²⁴	Cr ⁵¹	Mn ⁵⁴	Fe ⁵⁹	Co ⁵⁷	Co ⁵⁸	Co ⁶⁰	Cu ⁶⁴	Ta ¹⁸²
hr		(2)284	(3)297	(3)53	(3)167	(3)182	(3)289	(3)81	(2)228	0.01
Shot Tewa, Average Cloud and Outer Fallout Area Composition:										
45.8 min	0.763	(7)310	(11)719	(11)843	(10)163	(11)541	(10)256	(11)339	(8)901	(8)109
1.12 hrs	1.12	(7)304	(11)719	(11)843	(10)163	(11)541	(10)256	(11)339	(8)880	(8)109
1.64 hrs	1.64	(7)298	(11)719	(11)843	(10)163	(11)540	(10)256	(11)339	(8)855	(8)109
2.40 hrs	2.40	(7)287	(11)719	(11)843	(10)163	(11)540	(10)256	(11)339	(8)825	(8)109
3.52 hrs	3.52	(7)273	(11)719	(11)843	(10)163	(11)540	(10)255	(11)339	(8)775	(8)109
5.16 hrs	5.16	(7)253	(11)716	(11)843	(10)163	(11)540	(10)255	(11)339	(8)709	(8)109
7.56 hrs	7.56	(7)226	(11)713	(11)843	(10)162	(11)540	(10)255	(11)339	(8)622	(8)109
11.1 hrs	11.1	(7)192	(11)713	(11)843	(10)162	(11)540	(10)255	(11)339	(8)515	(8)109
16.2 hrs	16.2	(7)152	(11)707	(11)843	(10)162	(11)540	(10)254	(11)339	(8)390	(8)109
23.8 hrs	23.8	(7)106	(11)701	(11)843	(10)161	(11)539	(10)253	(11)339	(8)260	(8)108
1.45 hrs	34.8	(8)648	(11)695	(11)843	(10)160	(11)539	(10)252	(11)339	(8)143	(8)108
2.13 days	51.1	(8)304	(11)683	(11)843	(10)158	(11)538	(10)251	(11)339	(9)593	(8)108
3.12 days	74.9	(8)102	(11)665	(11)837	(10)156	(11)536	(10)248	(11)339	(9)165	(8)107
4.57 days	109.7	(9)205	(11)642	(11)837	(10)152	(11)534	(10)245	(11)339	(10)237	(8)106
6.70 days	160.8	(10)194	(11)606	(11)832	(10)147	(11)531	(10)240	(11)338	(11)159	(8)105
9.82 days	235.7	(12)594	(11)561	(11)827	(10)140	(11)527	(10)233	(11)338	(13)285	(8)103
14.4 days	345.6		(11)499	(11)816	(10)131	(11)521	(10)223	(11)337		(8)100
21.1 days	506.4		(11)422	(11)806	(10)118	(11)512	(10)209	(11)336		(9)960
30.9 days	741.6		(11)327	(11)790	(10)102	(11)499	(10)190	(11)335		(9)904
45.3 days	1,087		(11)227	(11)763	(11)815	(11)481	(10)166	(11)333		(9)828
66.4 days	1,594		(11)132	(11)726	(11)590	(11)456	(10)135	(11)330		(9)729
97.3 days	2,335		(12)603	(11)678	(11)367	(11)421	(10)100	(11)327		(9)603
143 days	3,432		(12)188	(11)610	(11)182	(11)374	(11)644	(11)322		(9)458
208 days	4,992		(13)362	(11)526	(12)673	(11)317	(11)347	(11)314		(9)307
301 days	7,224		(14)336	(11)425	(12)161	(11)250	(11)141	(11)304		(9)175

TABLE B. 22 CONTINUED

Age		Pb ²⁰³	Sum of FP
hr		(4)178	
Shot Tewa, Average Cloud and Outer Fallout Area Composition:			
45.8 min	0.763	(10)607	(3)1171
1.12 hrs	1.12	(10)605	(4)7727
1.64 hrs	1.64	(10)600	(4)4870
2.40 hrs	2.40	(10)594	(4)3015
3.52 hrs	3.52	(10)586	(4)1868
5.16 hrs	5.16	(10)573	(4)1175
7.56 hrs	7.56	(10)555	(5)7600
11.1 hrs	11.1	(10)529	(5)5065
16.2 hrs	16.2	(10)495	(5)3337
23.8 hrs	23.8	(10)449	(5)2124
1.45 days	34.8	(10)386	(6)1326
2.13 days	51.1	(10)310	(6)8054
3.12 days	74.9	(10)226	(6)4914
4.57 days	109.7	(10)142	(6)3154
6.70 days	160.8	(11)719	(6)2061
9.82 days	235.7	(11)265	(6)1353
14.4 days	345.6	(12)614	(7)8691
21.1 days	506.4	(13)719	(7)5473
30.9 days	741.6	(14)313	(7)3355
45.3 days	1,087		(7)1968
66.4 days	1,594		(7)1126
97.3 days	2,335		(8)6652
143 days	3,432		(8)3877
208 days	4,992		(8)1989
301 days	7,224		(9)8710

* Assumed same as Mn⁵⁴ from ratio observed at Navajo.

† Based on ratio Sb¹²²/Sb¹²⁴ for cloud sample.

‡ Based on ratio Ta¹⁸⁰/Ta¹⁸² for cloud sample.

§ Based on ratios U²⁴⁰/U²³⁹ and U²⁴⁰/U²³⁷ for cloud sample.

¶ Assumed same as Ta¹⁸².

TABLE B. 23 OBSERVED DOGHOUSE DECAY RATES OF FALLOUT AND CLOUD SAMPLES

Fallout samples listed are total undisturbed OCC trays, counted with aluminum covers in place on the floor of the counter, ~36 inches from a 1 inch NaI(Tl) crystal. The standard cloud samples are essentially point sources of filter paper in lusteroid tubes, placed in a clean OCC tray, and similarly covered and counted. The extended sources, or fallout samples, have been corrected to a point source equivalent by increasing the observed counting rate by 7 percent (Reference 66). Their fission contents appear under Total Fissions in Table B.12.

Counting Time			Observed Activity			Counting Time			Observed Activity		
H + hr	counts/min	counts/sec 10 ⁴ fissions	H + hr	counts/min	counts/sec 10 ⁴ fissions	H + hr	counts/min	counts/sec 10 ⁴ fissions	H + hr	counts/min	counts/sec 10 ⁴ fissions
<u>YAG 39-C-23 ZU</u>						<u>How F-B-12 ZU</u>					
192.2	14,930	7.93 × 10 ⁻⁷	76.9	2,945,620	9.97 × 10 ⁻⁷	383.1	4,647	2.46 × 10 ⁻⁷	98.3	2,242,750	7.59 × 10 ⁻⁷
598.3	2,073	1.13 × 10 ⁻⁷	190.8	930,350	3.15 × 10 ⁻⁷	771.5	1,416	7.51 × 10 ⁻⁸	382.1	266,730	9.03 × 10 ⁻⁸
1,538	509	2.71 × 10 ⁻⁸	771.4	78,557	2.66 × 10 ⁻⁸	1,539	359	2.71 × 10 ⁻⁸	1,539	35,970	1.22 × 10 ⁻⁸
<u>YFNB 13-E-55 ZU</u>						<u>How F-63 ZU</u>					
97.6	3,518,106	6.69 × 10 ⁻⁷	76.7	3,935,480	1.01 × 10 ⁻⁶	191	1,415,754	2.69 × 10 ⁻⁷	95.6	3,015,700	7.77 × 10 ⁻⁷
383	411,888	7.84 × 10 ⁻⁸	191.0	1,194,420	3.08 × 10 ⁻⁷	771	119,308	2.27 × 10 ⁻⁸	382.2	336,322	8.67 × 10 ⁻⁸
1,538	48,315	9.19 × 10 ⁻⁹	771.4	94,770	2.44 × 10 ⁻⁸	1,970	39,819	7.58 × 10 ⁻⁹	1,539	40,136	1.03 × 10 ⁻⁸
1,970	39,819	7.58 × 10 ⁻⁹	1,539	40,136	1.03 × 10 ⁻⁸	2,403	33,252	6.33 × 10 ⁻⁹			
2,403	33,252	6.33 × 10 ⁻⁹	<u>ZU Standard Cloud</u>								
<u>YFNB 13-E-58 ZU</u>						<u>YAG 40-B-17 FL</u>					
70.3	2,544,603	8.99 × 10 ⁻⁷	52.1	144,652	2.450 × 10 ⁻⁶	166.3	19,453	5.67 × 10 ⁻⁷	742.6	284,202	4.09 × 10 ⁻⁶
95.7	1,909,529	6.74 × 10 ⁻⁷	70.8	113,582	1.923 × 10 ⁻⁶	383.1	223,190	7.88 × 10 ⁻⁸	1,534.9	85,797	1.23 × 10 ⁻⁶
191	769,170	2.72 × 10 ⁻⁷	94.2	87,319	1.478 × 10 ⁻⁶	771	63,691	2.25 × 10 ⁻⁸			
383	223,190	7.88 × 10 ⁻⁸	123.3	65,194	1.104 × 10 ⁻⁶	1,539	26,463	9.34 × 10 ⁻⁹			
771	63,691	2.25 × 10 ⁻⁸	170.2	44,193	7.489 × 10 ⁻⁷	<u>How F-B-5 ZU</u>					
1,539	26,463	9.34 × 10 ⁻⁹	189.6	38,414	6.504 × 10 ⁻⁷	76.8	3,577,190	9.68 × 10 ⁻⁷	237.6	27,537	4.664 × 10 ⁻⁷
<u>YAG 40-B-17 FL</u>						<u>YFNB 13-E-58 FL</u>					
166.3	19,453	5.67 × 10 ⁻⁷	220.0	2,360,643	3.39 × 10 ⁻⁷	95.6	2,865,850	7.76 × 10 ⁻⁷	382.8	944,495	1.36 × 10 ⁻⁷
383.1	5,138	1.50 × 10 ⁻⁷	382.8	944,495	1.36 × 10 ⁻⁷	190.9	1,232,290	3.34 × 10 ⁻⁷	742.6	284,202	4.09 × 10 ⁻⁶
743.6	1,620	4.72 × 10 ⁻⁸	742.6	284,202	4.09 × 10 ⁻⁶	383.1	322,064	8.72 × 10 ⁻⁸	1,538	3,943	6.676 × 10 ⁻⁸
1,534.7	495	1.44 × 10 ⁻⁸	1,538	3,943	6.676 × 10 ⁻⁸	771	96,753	2.62 × 10 ⁻⁸	1,539	1,200	2.032 × 10 ⁻⁸
<u>YAG 39-C-22 FL</u>						<u>YFNB 29-H-79 FL</u>					
70.4	42,589	1.45 × 10 ⁻⁶	220.0	2,360,643	3.39 × 10 ⁻⁷	1,971	36,563	9.89 × 10 ⁻⁹	94.7	312,141	1.03 × 10 ⁻⁶
167.6	16,251	5.53 × 10 ⁻⁷	382.8	944,495	1.36 × 10 ⁻⁷	1,971	36,563	9.89 × 10 ⁻⁹	167.8	158,986	5.24 × 10 ⁻⁷
384.3	4,150	1.41 × 10 ⁻⁷	742.6	284,202	4.09 × 10 ⁻⁶	2,422	31,178	8.44 × 10 ⁻⁹	384.1	40,390	1.33 × 10 ⁻⁷
742.8	1,220	4.15 × 10 ⁻⁸	1,534.9	85,797	1.23 × 10 ⁻⁶	<u>YFNB 13-E-58 FL</u>					
1,534	390	1.33 × 10 ⁻⁸	1,535.5	3,722	1.23 × 10 ⁻⁶	<u>YFNB 29-H-79 FL</u>					
						<u>YFNB 13-E-58 FL</u>					
						<u>YFNB 29-H-79 FL</u>					

TABLE B.23 CONTINUED

Counting Time			Observed Activity			Counting Time			Observed Activity		
H + hr	counts/min	counts/sec 10 ⁴ fissions	H + hr	counts/min	counts/sec 10 ⁴ fissions	H + hr	counts/min	counts/sec 10 ⁴ fissions	H + hr	counts/min	counts/sec 10 ⁴ fissions
<u>YAG 39-C-23 FL</u>						<u>FL Standard Cloud</u>					
69.9	24,407	1.47 × 10 ⁻⁶	52.4	287,838	1.72 × 10 ⁻⁶	69.1	230,228	1.38 × 10 ⁻⁶	165.3	175,925	1.05 × 10 ⁻⁶
167.9	9,480	5.69 × 10 ⁻⁷	94.0	92,377	5.52 × 10 ⁻⁷	237.3	53,830	3.22 × 10 ⁻⁷	381.8	24,750	1.48 × 10 ⁻⁷
382.6	2,344	1.41 × 10 ⁻⁷	742.4	7,872	4.70 × 10 ⁻⁸	1,534	2,220	1.33 × 10 ⁻⁸	<u>YAG 40-B-17 NA</u>		
743.8	708	4.25 × 10 ⁻⁸				166.6	28,016	3.92 × 10 ⁻⁷	219.6	18,249	2.67 × 10 ⁻⁷
1,534.4	225	1.35 × 10 ⁻⁸				358.5	7,642	1.12 × 10 ⁻⁷	746.4	2,649	3.87 × 10 ⁻⁸
<u>LST 611-D-53 FL</u>						<u>YFNB 13-E-60 NA</u>					
166.1	149,251	4.65 × 10 ⁻⁷	69.8	999,232	1.31 × 10 ⁻⁶	143.5	429,456	5.63 × 10 ⁻⁷	219.7	232,011	3.04 × 10 ⁻⁷
384.2	35,315	1.10 × 10 ⁻⁷	102.9	102,949	1.34 × 10 ⁻⁷	359.4	36,000	4.72 × 10 ⁻⁸	747.0	27,495	3.60 × 10 ⁻⁸
742.7	10,828	3.37 × 10 ⁻⁸	915.6	27,495	3.60 × 10 ⁻⁸	1,082.2	22,014	2.89 × 10 ⁻⁸	1,344.3	16,757	2.20 × 10 ⁻⁸
1,534.8	3,098	9.64 × 10 ⁻⁹	1,513.9	14,801	1.91 × 10 ⁻⁸	1,870.4	11,469	1.50 × 10 ⁻⁸	2,205.1	9,718	1.27 × 10 ⁻⁸
1,845.7	2,409	7.50 × 10 ⁻⁹	2,773.6	7,277	9.54 × 10 ⁻⁹	<u>How F-63 NA</u>					
2,209	1,960	6.10 × 10 ⁻⁹	70.4	28,717	1.20 × 10 ⁻⁶	143.8	12,278	5.14 × 10 ⁻⁷	219.1	6,454	2.70 × 10 ⁻⁷
2,900	1,363	4.24 × 10 ⁻⁹	219.1	12,278	5.14 × 10 ⁻⁷	359.0	6,454	2.70 × 10 ⁻⁷	746.1	2,880	1.21 × 10 ⁻⁷
<u>YFNB 13-E-55 FL</u>						<u>YFNB 29-H-79 NA</u>					
219.6	2,235,884	3.38 × 10 ⁻⁷	71.4	23,959	1.04 × 10 ⁻⁶	145.9	10,530	4.56 × 10 ⁻⁷	358.9	5,730	2.48 × 10 ⁻⁷
382.9	865,062	1.31 × 10 ⁻⁷	218.8	10,530	4.56 × 10 ⁻⁷	746.4	2,702	1.17 × 10 ⁻⁷	746.4	1,050	4.54 × 10 ⁻⁸
743.4	270,865	4.09 × 10 ⁻⁸	358.9	5,730	2.48 × 10 ⁻⁷	1,366.0	1,050	4.54 × 10 ⁻⁸	1,366.0	561	2.43 × 10 ⁻⁸
1,535.4	81,189	1.19 × 10 ⁻⁸	1,517	466	1.95 × 10 ⁻⁸	1,515.9	516	2.23 × 10 ⁻⁸	1,515.9	516	2.23 × 10 ⁻⁸
2,209	52,372	7.92 × 10 ⁻⁹									
2,900	36,557	5.52 × 10 ⁻⁹									
<u>YAG 39-C-22 NA</u>											
74.2	200,434	1.02 × 10 ⁻⁶									
144.3	92,195	4.71 × 10 ⁻⁷									
219.5	49,082	2.51 × 10 ⁻⁷									
359.5	21,233	1.08 × 10 ⁻⁷									
746.9	6,983	3.57 × 10 ⁻⁸									
915.7	5,460	2.80 × 10 ⁻⁸									
1,080.7	4,413	2.25 × 10 ⁻⁸									
1,366.1	3,409	1.74 × 10 ⁻⁸									
1,490.0	2,959	1.51 × 10 ⁻⁸									
1,870.5	2,479	1.27 × 10 ⁻⁸									
2,205.6	2,059	1.05 × 10 ⁻⁸									
2,837.9	1,577	8.06 × 10 ⁻⁹									
<u>YAG 39-C-23 NA</u>											
69.7	172,144	1.12 × 10 ⁻⁶									
143.7	73,853	4.79 × 10 ⁻⁷									
218.9	39,141	2.54 × 10 ⁻⁷									
358.8	16,750	1.08 × 10 ⁻⁷									
747.0	5,611	3.64 × 10 ⁻⁸									
1,080.3	3,469	2.25 × 10 ⁻⁸									
1,365.6	2,822	1.83 × 10 ⁻⁸									
1,490.8	2,462	1.59 × 10 ⁻⁸									
<u>LST 611-D-53 NA</u>											
74.6	28,098	1.15 × 10 ⁻⁶									
143.6	12,919	5.30 × 10 ⁻⁷									
219.6	7,899	3.24 × 10 ⁻⁷									
358.6	2,892	1.19 × 10 ⁻⁷									
746.6	974	3.99 × 10 ⁻⁸									
1,082.2	581	2.38 × 10 ⁻⁸									
1,348.0	465	1.90 × 10 ⁻⁸									
1,515.7	396	1.62 × 10 ⁻⁸									

TABLE B.23 CONTINUED

Counting Time			Observed Activity			Counting Time			Observed Activity		
H + hr	counts/min	counts/sec 10 ⁴ fissions	H + hr	counts/min	counts/sec 10 ⁴ fissions	H + hr	counts/min	counts/sec 10 ⁴ fissions	H + hr	counts/min	counts/sec 10 ⁴ fissions
<u>YFNB 13-E-55 NA</u>						<u>NA Standard Cloud</u>					
74.5	664,981	1.24 × 10 ⁻⁶	1,102.7	6,500	2.300 × 10 ⁻⁶	49.8	35,258	1.698 × 10 ⁻⁶	166.1	956,332	5.11 × 10 ⁻⁷
144.4	297,774	5.54 × 10 ⁻⁷	1,515.0	3,938	1.394 × 10 ⁻⁶	71.9	24,185	1.164 × 10 ⁻⁶	240.5	519,659	2.77 × 10 ⁻⁷
219.0	153,938	2.86 × 10 ⁻⁷	1,850.0	2,819	9.974 × 10 ⁻⁸	142.9	10,784	5.194 × 10 ⁻⁷	408.3	199,818	1.07 × 10 ⁻⁷
358.7	60,274	1.12 × 10 ⁻⁷	2,184.0	2,286	8.089 × 10 ⁻⁸	218.6	5,724	2.757 × 10 ⁻⁷	674.9	87,570	4.67 × 10 ⁻⁸
746.8	20,954	4.40 × 10 ⁻⁸	2,856.0	1,520	5.380 × 10 ⁻⁸	357.6	2,438	1.174 × 10 ⁻⁷	766.8	70,485	3.76 × 10 ⁻⁸
1,081.9	14,486	2.70 × 10 ⁻⁸				814.0	736	3.543 × 10 ⁻⁸	911.0	52,294	2.79 × 10 ⁻⁸
1,365.8	11,729	2.18 × 10 ⁻⁸				1,083.0	513	2.471 × 10 ⁻⁸	1,108.6	38,524	2.06 × 10 ⁻⁸
1,516.0	11,087	2.06 × 10 ⁻⁸				1,342.0	397	1.910 × 10 ⁻⁸	1,318.9	30,370	1.62 × 10 ⁻⁸
<u>YAG 40-B-17 TE</u>						<u>LST 611-D-53 TE</u>					
166.2	2,574,369	6.35 × 10 ⁻⁷				1,512.0	339	1.632 × 10 ⁻⁸	2,855.0	11,593	6.19 × 10 ⁻⁹
240.6	1,416,545	3.49 × 10 ⁻⁷									
407.8	532,469	1.32 × 10 ⁻⁷									
674.6	239,457	5.91 × 10 ⁻⁸									
766.7	171,997	4.25 × 10 ⁻⁸									
910.8	142,537	3.52 × 10 ⁻⁸									
1,125.6	102,048	2.52 × 10 ⁻⁸									
1,299.7	81,898	2.02 × 10 ⁻⁸									
1,494.7	67,541	1.67 × 10 ⁻⁸									
<u>YAG 39-C-23 TE</u>						<u>YFNB 13-E-55 TE</u>					
240.1	1,665,239	2.45 × 10 ⁻⁷									
408.2	630,800	9.30 × 10 ⁻⁸									
675.9	266,401	3.92 × 10 ⁻⁸									
766.7	218,954	3.22 × 10 ⁻⁸									
910.8	163,349	2.40 × 10 ⁻⁸									
1,126.4	117,404	1.73 × 10 ⁻⁸									
1,300.6	93,898	1.38 × 10 ⁻⁸									
1,493.4	78,074	1.15 × 10 ⁻⁸									
<u>YAG 39-C-35 TE</u>						<u>YFNB 13-E-60 TE</u>					
240.4	2,404,826	2.45 × 10 ⁻⁷									
408.0	888,580	9.05 × 10 ⁻⁸									
675.1	398,518	4.06 × 10 ⁻⁸									
767.0	318,530	3.24 × 10 ⁻⁸									
910.8	237,960	2.42 × 10 ⁻⁸									
1,125.6	172,678	1.76 × 10 ⁻⁸									
1,299.6	138,005	1.41 × 10 ⁻⁸									
1,495.1	113,942	1.16 × 10 ⁻⁸									
1,831.0	88,350	9.00 × 10 ⁻⁹									
2,165.0	72,540	7.39 × 10 ⁻⁹									
2,856.0	53,454	5.45 × 10 ⁻⁹									
<u>How F-63 TE</u>						<u>YFNB 29-H-79 TE</u>					
120.2	259,094	5.44 × 10 ⁻⁷									
240.4	86,299	1.81 × 10 ⁻⁷									
407.8	29,213	6.13 × 10 ⁻⁸									
675.2	12,115	2.54 × 10 ⁻⁸									
766.6	9,891	2.03 × 10 ⁻⁸									
1,125	5,393	1.13 × 10 ⁻⁸									
1,318	4,305	9.03 × 10 ⁻⁹									
1,514	3,727	7.82 × 10 ⁻⁹									
<u>TE Standard Cloud</u>						<u>YFNB 29-H-79 TE</u>					
71.5	441,580	1.562 × 10 ⁻⁶									
119.8	246,849	8.728 × 10 ⁻⁷									
144.0	212,310	7.512 × 10 ⁻⁷									
239.0	98,678	3.492 × 10 ⁻⁷									
406.5	38,975	1.379 × 10 ⁻⁷									
909.8	9,202	3.256 × 10 ⁻⁸									

TABLE B.24 COMPUTED BETA-DECAY RATES

Beta-emission rates for fission products (FP) and induced products (IP) are computed and summed for the total emission rate in units of $(\beta/\text{sec})/10^4$ fissions. Product/fission ratios are listed directly under the nuclide symbol. Conversion to counting rates, $(\text{counts/sec})/10^4$ fissions, for a weightless mount and (point) source is made in the last column by means of the shelf factor G_n for comparison with experimental results (Table B.25). Numbers in parentheses indicate the number of zeros between the decimal point and the first significant figure, e. g., (2)200 = 0.00200.

	Age	Na ²⁴	Co ⁵⁷	Co ⁵⁸ *	Cu ⁶⁴ †	Sum of FP	counts/sec	
	hr	0.00145	0.0036	0.0053	0.00217		10 ⁴ fissions (G ₁ = 0.2628)	
Shot Flathead, Average Fallout Composition:								
254	45.8 min	0.763	(3)180	No β	(6)756	(3)178	1.544	0.5274
	1.12 hrs	1.12	(3)177		(6)756	(3)174	1.009	0.3324
	1.64 hrs	1.64	(3)173		(6)755	(3)169	0.634	0.1969
	2.40 hrs	2.40	(3)167		(6)755	(3)163	0.398	0.1166
	3.52 hrs	3.52	(3)158		(6)754	(3)153	0.255	(1)7335
	5.16 hrs	5.16	(3)146		(6)754	(3)140	0.166	(1)4893
	7.56 hrs	7.56	(3)131		(6)754	(3)123	0.109	(1)3364
	11.1 hrs	11.1	(3)111		(6)752	(3)102	(1)716	(1)2343
	16.2 hrs	16.2	(4)880		(6)751	(4)773	(1)456	(1)1615
	23.8 hrs	23.8	(4)618		(6)748	(4)513	(1)282	(1)1103
	1.45 days	34.8	(4)376		(6)745	(4)283	(1)176	(2)7640
	2.13 days	51.1	(4)175		(6)740	(4)117	(1)109	(2)5256
	3.12 days	74.9	(5)590		(6)733	(5)327	(2)674	(2)3564
	4.57 days	109.7	(5)119		(6)723	(6)498	(2)452	(2)2430
	6.70 days	160.8	(6)112		(6)708	(7)315	(2)309	(2)1580
	9.82 days	235.7	(8)344		(6)688	(9)566	(2)212	(3)9708
	14.4 days	345.6	(10)230		(6)658	(11)141	(2)145	(3)5770
	21.1 days	506.4			(6)617		(3)972	(3)3374
	30.9 days	741.6			(6)561		(3)637	(3)1957
	45.3 days	1,087			(6)489		(3)411	(3)1145
66.4 days	1,594			(6)398		(3)262	(4)6968	
97.3 days	2,335			(6)296		(3)170	(4)4478	
143 days	3,432			(6)191		(3)105	(4)2765	
208 days	4,992			(6)102		(4)590	(4)1553	
301 days	7,224			(7)417		(4)311	(5)8184	

TABLE B.24 CONTINUED

Age		Na ²⁴	Mn ⁵⁶	Fe ⁵⁹	Co ⁵⁸ *	Co ⁶⁰	Cu ⁶⁴ †	Ta ¹⁸⁰ ‡	Ta ¹⁸²
hr		0.0314	0.094	0.0033	0.00193	0.0087	0.0278	0.038	0.038
Shot Navajo, Average Fallout Composition:									
45.8 min	0.763	(2)389	(1)572	(5)585	(6)275	(6)363	(2)228	(2)840	(4)267
1.12 hrs	1.12	(2)383	(1)519	(5)585	(6)275	(6)363	(2)223	(2)817	(4)267
1.64 hrs	1.64	(2)374	(1)451	(5)585	(6)275	(6)363	(2)217	(2)779	(4)267
2.40 hrs	2.40	(2)361	(1)368	(5)585	(6)275	(6)363	(2)209	(2)733	(4)267
3.52 hrs	3.52	(2)342	(1)273	(5)584	(6)275	(6)363	(2)197	(2)655	(4)267
5.16 hrs	5.16	(2)317	(1)175	(5)584	(6)275	(6)363	(2)180	(2)578	(4)267
7.56 hrs	7.56	(2)284	(2)918	(5)583	(6)274	(6)363	(2)158	(2)471	(4)267
11.1 hrs	11.1	(2)241	(2)356	(5)581	(6)274	(6)363	(2)131	(2)349	(4)267
16.2 hrs	16.2	(2)191	(3)904	(5)580	(6)273	(6)363	(3)991	(2)226	(4)266
23.8 hrs	23.8	(2)134	(3)118	(5)577	(6)272	(6)363	(3)658	(2)119	(4)266
1.45 days	34.8	(3)813	(5)610	(5)573	(6)271	(6)363	(3)363	(3)464	(4)265
2.13 days	51.1	(3)380	(7)785	(5)567	(6)270	(6)363	(3)150	(3)116	(4)264
3.12 days	74.9	(3)128	(9)132	(5)558	(6)267	(6)362	(4)418	(4)154	(4)262
4.57 days	109.7	(4)257		(5)546	(6)263	(6)362	(5)639	(6)798	(4)260
6.70 days	160.8	(5)243		(5)529	(6)258	(6)362	(6)404	(7)104	(4)256
9.82 days	235.7	(7)744		(5)504	(6)250	(6)361	(8)726	(10)178	(4)252
14.4 days	345.6	(9)499		(5)470	(6)240	(6)361	(10)181		(4)245
21.1 days	506.4			(5)424	(6)225	(6)360			(4)235
30.9 days	741.6			(5)365	(6)204	(6)359			(4)222
45.3 days	1,087			(5)292	(6)178	(6)357			(4)203
66.4 days	1,594			(5)212	(8)145	(6)354			(4)179
97.3 days	2,335			(5)132	(6)108	(6)350			(4)148
143 days	3,432			(6)653	(7)694	(6)345			(4)112
208 days	4,992			(6)241	(7)372	(6)337			(5)752
301 days	7,224			(7)579	(7)152	(6)325			(5)429

TABLE B. 24 CONTINUED

Age		Fallout Composition:	Sum of FP	counts/sec 10^4 fissions ($G_3 = 0.0958$)
hr				
Shot Navajo, Average				
45.8 min	0.763		1.544	0.172
1.12 hrs	1.12		1.009	0.113
1.64 hrs	1.64		0.634	(1)714
2.40 hrs	2.40		0.398	(1)455
3.52 hrs	3.52		0.255	(1)300
5.16 hrs	5.16		0.166	(1)201
7.56 hrs	7.56		0.109	(1)136
11.1 hrs	11.1		(1)716	(2)913
16.2 hrs	16.2		(1)456	(2)599
23.8 hrs	23.8		(1)282	(2)382
1.45 days	34.8		(1)176	(2)242
2.13 days	51.1		(1)109	(2)149
3.12 days	74.9		(2)674	(3)912
4.57 days	109.7		(2)452	(3)592
6.70 days	160.8		(2)309	(3)388
9.82 days	235.7		(2)212	(3)252
14.4 days	345.6		(2)145	(3)162
21.1 days	506.4		(3)972	(3)103
30.9 days	741.6		(3)637	(4)663
45.3 days	1,087		(3)411	(4)422
66.4 days	1,594		(3)262	(4)271
97.3 days	2,335		(3)170	(4)179
143 days	3,432		(3)105	(4)112
208 days	4,992		(4)590	(5)643
301 days	7,224		(4)311	(5)343

* $0.57 \beta^+$ /dis.† $0.128 \beta^+$ /dis.‡ $0.21 \beta^-$ /dis.§ Product ratio assumed same as Ta^{182} .

TABLE B. 25 OBSERVED BETA-DECAY RATES

Beta counting samples, supported and covered by 0.80 mg/cm² of pliofilm, were prepared on the YAG 40 from aliquots of SIC tray stock solution. Measurements initiated there were usually continued on Site Elmer, and terminated at NRDL. When stock solution activity permitted, a portion was shipped to NRDL as soon as possible, allowing simultaneous field and NRDL decay measurements to be obtained. Nominally identical continuous-flow proportional detectors were installed at all three locations, and small response differences were normalized by Cs¹³⁷ reference standards. No scattering or absorption corrections have been made to the observed counts.

Counter Location	Age hr	Activity counts/sec 10 ⁴ fissions	Counter Location	Age hr	Activity counts/sec 10 ⁴ fissions
Shot Flathead, Sample 3473/β, 3.09 × 10 ⁸ fission, Shelf 1					
YAG 40	16.4	127.4 × 10 ⁻⁴	Site Elmer	112.3	22.83 × 10 ⁻⁴
	19.5	109.3		123.8	20.07
	21.7	99.42		130.9	18.66
	24.0	89.42		136.6	17.84
	27.9	80.06		153.4	15.33
	31.1	72.70		161.5	14.69
	34.1	67.77		175.0	13.02
	36.6	63.35		194.2	11.49
	41.1	57.69		224.1	9.412
	45.0	53.26		247.8	8.339
	49.8	49.97	NRDL	194.8	11.49 × 10 ⁻⁴
Site Elmer	54.1	44.22 × 10 ⁻⁴		215	10.18
	57.9	40.97		261	7.718
	62.0	38.68		333	5.389
	65.6	36.47		429	3.586
	69.6	34.38		501	2.875
	73.8	34.21		598	2.226
	75.5	32.87		723	1.692
	78.8	30.66		891	1.228
	85.0	29.26		1,034	0.9812
	90.1	27.90		1,223	0.7773
	96.5	26.24		1,417	0.5916
	103.7	24.19		1,582	0.5194
Shot Navajo, Sample P-3753/β #2, 7.24 × 10 ⁸ fission, Shelf 3.					
YAG 40	12.62	7.428 × 10 ⁻³	NRDL	984	4.196 × 10 ⁻⁶
	15.58	5.801		1,030	3.906
	18.24	4.933		1,080	3.731
	20.33	4.386		1,151	3.223
	23.76	3.701		1,198	3.269
	26.90	3.276		1,246	3.128
	29.78	2.950		1,342	2.620
	34.51	2.495		1,450	2.647
	38.0	2.262		1,485	2.477
	47.9	1.748		1,534	2.373
Site Elmer	67.8	1.157 × 10 ⁻³		1,750	2.040
	74.6	1.027		1,850	1.883
	87.0	8.640 × 10 ⁻⁴		2,014	1.710
	89.9	8.262		2,164	1.535
	99.0	7.363		2,374	1.425
YAG 40	122.9	5.691 × 10 ⁻⁴		2,541	1.293
	150.0	4.446		2,666	1.252
	170.6	3.736		2,834	1.077
	226.1	2.597		3,266	9.346 × 10 ⁻⁶
	278.5	1.973		3,500	8.678
NRDL	478	1.011 × 10 ⁻⁴		3,914	7.413
	574	7.937 × 10 ⁻⁶		4,320	6.308
	647	6.878		4,750	5.617
	693	6.436		5,330	4.857
	742	5.904		5,930	4.005
	814	5.359		6,580	3.752
	861	4.968		6,740	3.453
	912	4.733		8,230	3.039
				8,640	2.440

TABLE B. 26 4- π GAMMA IONIZATION CHAMBER MEASUREMENTS

The fallout samples listed are all solutions of OCC samples. Because three instruments with varying responses were involved in measurements during Operation Redwing, observed values have been arbitrarily normalized linearly to a standard response of 700×10^{-9} ma for 100 μ g of radium.

Shot and Station	Sample	Number of Fissions	Age	Ion Current
	Volume			
	ml		hr	ma/fission $\times 10^{-21}$
Shot Zuni				
YAG 40-B-6	10	5.08×10^{13}	387	8.096
			772	3.335
			1,540	1.499
How F-61 (1)	10	1.00×10^{13}	219	8.557
			243	7.284
			387	3.604
			772	1.645
			1,540	0.929
How F-61 (2)	10	1.00×10^{13}	239	7.143
How F-61 (3)	2	2.00×10^{12}	214	8.842
			429	3.053
Standard cloud	—	9.84×10^{12}	52.4	197.1
			190	51.49
			267	34.00
			526	13.64
			772	7.959
			1,540	2.751
			5,784	0.351
Shot Flathead				
YAG 39-C-21 (1)	10	5.08×10^{11}	220	18.60
			244	16.32
			266	14.33
			388	8.244
			746	3.334
			1,539	1.440
YFNB 13-E-54 (1)	10	3.81×10^{13}	267	11.86
			388	7.989
			746	3.099
YFNB 13-E-54 (2)	10	3.81×10^{13}	340	9.107
YFNB 29-G-68 (1)	10	1.39×10^{12}	220	19.20
			244	16.76
			266	14.80
			388	8.538
			747	3.457
			1,540	1.420
Standard cloud	—	2.79×10^{13}	73.6	80.90
			95.1	63.37
			166	34.11
			196	28.72
			387	12.30
			747	5.082
			1,539	1.663
Shot Navajo				
YAG 39-C-21 (1)	10	3.90×10^{12}	196	20.58
			244	15.58
			317	10.99
			387	8.441
			741	3.929
			915	2.884
			1,084	2.348
			1,347	1.843
			1,541	1.610

TABLE B. 26 CONTINUED

Sample		Number of Fissions	Age	Ion Current
Shot and Station	Volume			
	ml		hr	ma/fissions $\times 10^{-21}$
Shot Navajo				
YAG 39-C-21 (2)	10	3.90×10^{12}	220	16.74
YFNB 13-E-56 (1)	10	6.50×10^{12}	196	23.44
			244	18.33
			317	12.13
			387	9.944
			746	4.572
			915	3.550
			1,084	2.866
			1,347	2.092
			1,540	2.009
YFNB 13-E-56 (2)	10	6.50×10^{12}	220	20.81
Standard cloud	—	3.46×10^{12}	52.5	143.44
			75.8	87.54
			148	37.83
			196	26.57
			387	11.06
			742	5.043
			915	3.928
			1,084	3.139
			1,344	2.434
			1,536	2.136
			6,960	0.380
Shot Tewa				
YAG 39-C-21 (1)	10	1.82×10^{14}	267	12.36
			292	10.92
			408	5.984
			580	3.589
			675	2.902
			773	2.632
			916	1.936
			1,108	1.680
			1,300	1.211
			1,517	1.056
			1,852	0.906
YAG 39-C-21 (2)	10	1.82×10^{14}	286	11.00
YFNB 13-E-54 (1)	10	2.38×10^{13}	292	6.345
			408	3.692
			580	2.134
			675	1.730
			773	1.458
			916	1.187
			1,108	0.964
			1,300	0.727
			1,517	0.653
YFNB 13-E-54 (2)	10	2.38×10^{13}	262	7.566
Standard cloud	—	4.71×10^{13}	77.0	88.74
			101.	69.07
			123	56.67
			172	39.83
			244	24.18
			408	12.15
			675	5.998
			773	4.904
			916	3.769
			1,108	2.726
			1,300	2.076
			1,517	1.664
			1,851	1.201

TABLE B. 27 GAMMA ACTIVITY AND MEAN FISSION CONTENT OF HOW F BURIED COLLECTORS
(AREA = 2.60 FT²)

The activities summarized in this table have been corrected for contributions from shots other than the one designated. Flathead produced no activity in these collectors resolvable from the Zuni background. The conversion to fissions was made by means of the How Island factors shown in Table B.13.

Collector Designator	Shot Cherokee *	Shot Zuni	Shot Navajo	Shot Tewa
	Doghouse Activity at 100 hr counts/min	Doghouse Activity at 100 hr counts/min	Doghouse Activity at 100 hr counts/min	Doghouse Activity at 100 hr counts/min
F-B1	79	2,154,000	20,809 †	262,800
-B2	87	2,261,000	14,145 †	250,860
-B3	548	2,022,000	13,870 †	203,380
-B4	598	1,963,000	9,088 †	246,760
-B5	2,560	2,737,000	19,443	206,940
-B6	897	1,504,000 †	30,650 †	303,820
-B7 ‡	80	3,448,000	26,454	329,970
-B8	96	2,295,000	7,688	138,500 †
-B9	30	2,168,000	8,163	208,640
-B10	174	2,463,000	18,550	200,450
-B11 §	240	1,287,000	6,176 †	39,370
-B12	1,056	2,189,000	17,654	216,810
Mean and σ :	537 ± 192 (35.8 pct)	2,250,200 ± 234,170 (10.41 pct)	14,300 ± 5,855 (40.94 pct)	233,384 ± 35,150 (15.06 pct)
Mean fissions/ collector		$5.42 \pm 0.57 \times 10^{14}$	$3.21 \pm 1.32 \times 10^{12}$	$5.98 \pm 0.90 \times 10^{13}$
Mean fissions/ ft ²		$2.08 \pm 0.22 \times 10^{14}$	$1.24 \pm 0.51 \times 10^{12}$	$2.30 \pm 0.35 \times 10^{13}$

* Values are pre-Redwing background activities.

† Collector in estimated platform shadow; omitted from mean value.

‡ Collector directly under platform; omitted from mean value.

§ Collector on sandbank slope; omitted from mean value.

¶ Water leakage during recovery; omitted from mean value.

TABLE B.28 HOW ISLAND SURVEYS, STATION F
I. OBSERVED IONIZATION RATES

"Closed Window" readings 3 feet above ground at points shown on station layout (Figure 2.8).

Survey Time (Mike)	Hours Since				Ionization Rate, mr/hr												Mean and σ	Instrument Type and Serial	
	ZU	FL	NA	TE	F-B1	F-B2	F-B3	F-B4	F-B5	F-B6	F-B7	F-B8	F-B9	F-B10	F-B11	F-B12			
6 May 1200	—	—	—	—	0.20	0.20	0.20	0.20	0.40	0.40	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.23	T1B 2443
21 1615	—	—	—	—	0.05	0.05	0.10	0.05	0.50	0.20	0.10	0.10	0.10	0.10	0.20	0.30	0.15	MX-5 17539	
22 1120	—	—	—	—	0.10	0.10	0.20	0.15	0.30	0.20	0.15	0.10	0.10	0.10	0.20	0.25	0.16	MX-5 65008	
23 1040	—	—	—	—	0.20	0.20	0.20	0.20	0.40	0.40	0.20	0.20	0.20	0.20	0.20	0.20	0.32	T1B 2443	
26 0930	—	—	—	—	0.10	0.10	0.20	0.20	0.30	0.20	0.15	0.10	0.10	0.10	0.15	0.20	0.28	MX-5 65008	
28 1710	11.2	—	—	—	—	1400	—	1600	1800	—	—	—	1800	1800	1800	1800	1714 ± 157	Cutie Pie 5028	
29 1216	30.3	—	—	—	590	580	600	570	580	530	560	580	550	580	450	560	561	Cutie Pie 5028	
30 1025	52.5	—	—	—	300	300	310	300	310	320	290	240	250	340	240	300	292	Cutie Pie 5501	
1 June 1032	100.6	—	—	—	150	160	160	160	140	160	140	100	110	160	110	160	142	Cutie Pie 0325	
2 1008	124.2	—	—	—	100	110	110	100	110	120	100	84	88	110	86	100	101	Cutie Pie 5501	
3 1053	149.0	—	—	—	89	88	94	89	88	99	85	68	68	90	63	88	84.1	Cutie Pie 5501	
5 1135	197.6	—	—	—	60	61	65	59	60	73	57	44	46	59	44	64	57.7	Cutie Pie 5501	
7 1230	246.6	—	—	—	45	46	48	46	48	62	40	28	30	40	32	38	41.9 ± 9.4	Cutie Pie 5516	
12 1620	370.4	9.9	—	—	22	20	21	22	—	31	24	14	16	21	15	24	20.9	Cutie Pie 5507	
13 1015	388.3	27.8	—	—	20	22	22	20	20	30	22	18	18	20	18	20	20.8 ± 3.2	Cutie Pie 5516	
14 1023	412.4	51.9	—	—	20	19	20	20	19	23	21	12	15	19	14	16	18.2	Cutie Pie 5501	
9 July 1600	1,018	658	—	—	10	9	9	8	8	9	14	4	6	7	8	7	8.25 ± 2.4	T1B 580	
11 1300	1,063	703	7.1	—	—	80	—	80	—	—	—	—	80	—	80	80	80.0	T1B 2058	
11 1628	1,066	706	10.5	—	55	51	53	53	56	54	55	50	49	50	47	52	52.1	Cutie Pie 5501	
12 1050	1,085	725	28.9	—	16	20	16	15	14	19	18	12	14	16	14	14	15.7	Cutie Pie 5516	
13 1400	1,112	752	56.1	—	15	14	14	12	13	14	16	10	11	11	10	10	12.5	Cutie Pie 5502	
21 1418	1,304	944	248.	8.5	240	—	—	260	—	—	180	—	240	—	210	240	228 ± 29	T1B 7234	
21 1622	1,306	946	250	10.6	220	210	220	190	180	210	200	160	190	180	140	220	193 ± 25	Cutie Pie 5503	
22 1022	1,324	946	268	28.6	95	86	94	88	90	110	91	75	79	82	71	89	87.5 ± 10.2	Cutie Pie 5516	
23 1100	1,349	989	293	53.2	36	36	38	36	34	30	30	30	30	32	28	32	32.7 ± 3.2	T1B 7826	
25 0836	1,395	1,035	339	98.8	21	21	22	20	20	25	23	16	15	19	16	18	19.7 ± 3.0	Cutie Pie 5507	

TABLE B.28 HOW ISLAND SURVEYS, STATION F
II. RESOLUTION OF IONIZATION RATES BY EVENT

The ionization rates for Shots Zuni, Navajo, and Tewa are shown; Shots Flathead and Dakota produced negligible amounts of fallout.

Hours Since				Ionization Rate, mr/hr					
ZU	FL	NA	TE	ZU *	Na †	TE		Mean Observed and σ	Residual Error
						By Diff. ‡	By Relative Decay §		
								pct	pct
11.2	—	—	—	1,714	—	—	—	1,714 ± 9.18	—
30.3	—	—	—	561	—	—	—	561	—
52.5	—	—	—	292	—	—	—	292	—
100.6	—	—	—	142	—	—	—	142	—
124.2	—	—	—	101	—	—	—	101	—
149.0	—	—	—	84.1	—	—	—	84.1	—
197.8	—	—	—	57.7	—	—	—	57.7	—
246.6	—	—	—	41.9	—	—	—	41.9 ± 22.5	—
370.4	9.9	—	—	20.9	—	—	—	20.9	—
388.3	27.8	—	—	20.8	—	—	—	20.8 ± 15.6	—
412.4	51.9	—	—	18.2	—	—	—	18.2	—
1,018	658	—	—	8.82	—	—	—	8.25 ± 29.3	—
1,063	703	7.1	—	8.60	71.4	—	—	80.0	—
1,066	706	10.5	—	8.60	43.5	—	—	52.1	—
1,085	725	28.9	—	8.46	7.24	—	—	15.7	—
1,112	752	56.1	—	8.32	4.18	—	—	12.5	—
1,304	944	248	8.5	7.55	0.463	220	199.2	228 ± 12.5	-9.45
1,308	946	250	10.8	7.55	0.456	185	161.7	193 ± 13.2	-12.6
1,324	964	266	28.6	7.48	0.410	79.6	64.3	87.5 ± 11.7	-19.2
1,349	989	293	53.2	7.48	0.364	24.9	34.5	32.7 ± 9.88	+38.5
1,395	1,035	339	98.8	7.34	0.293	12.1	15.3	19.7 ± 15.4	+26.4

* Computed from ZU + 1018 hr and later by 4- π gamma relative ionization decay of How F-64 ZU, Tray 856.

† Computed from difference, observed ZU, to NA + 56.1 hours; thereafter by 4- π gamma relative ionization decay of YAG 40-A-1, Tray P-3753.

‡ Computed from difference, observed (ZU + NA).

§ Computed from best fit of 4- π gamma relative ionization decay of YFNB 13-E-57, Tray 1973.

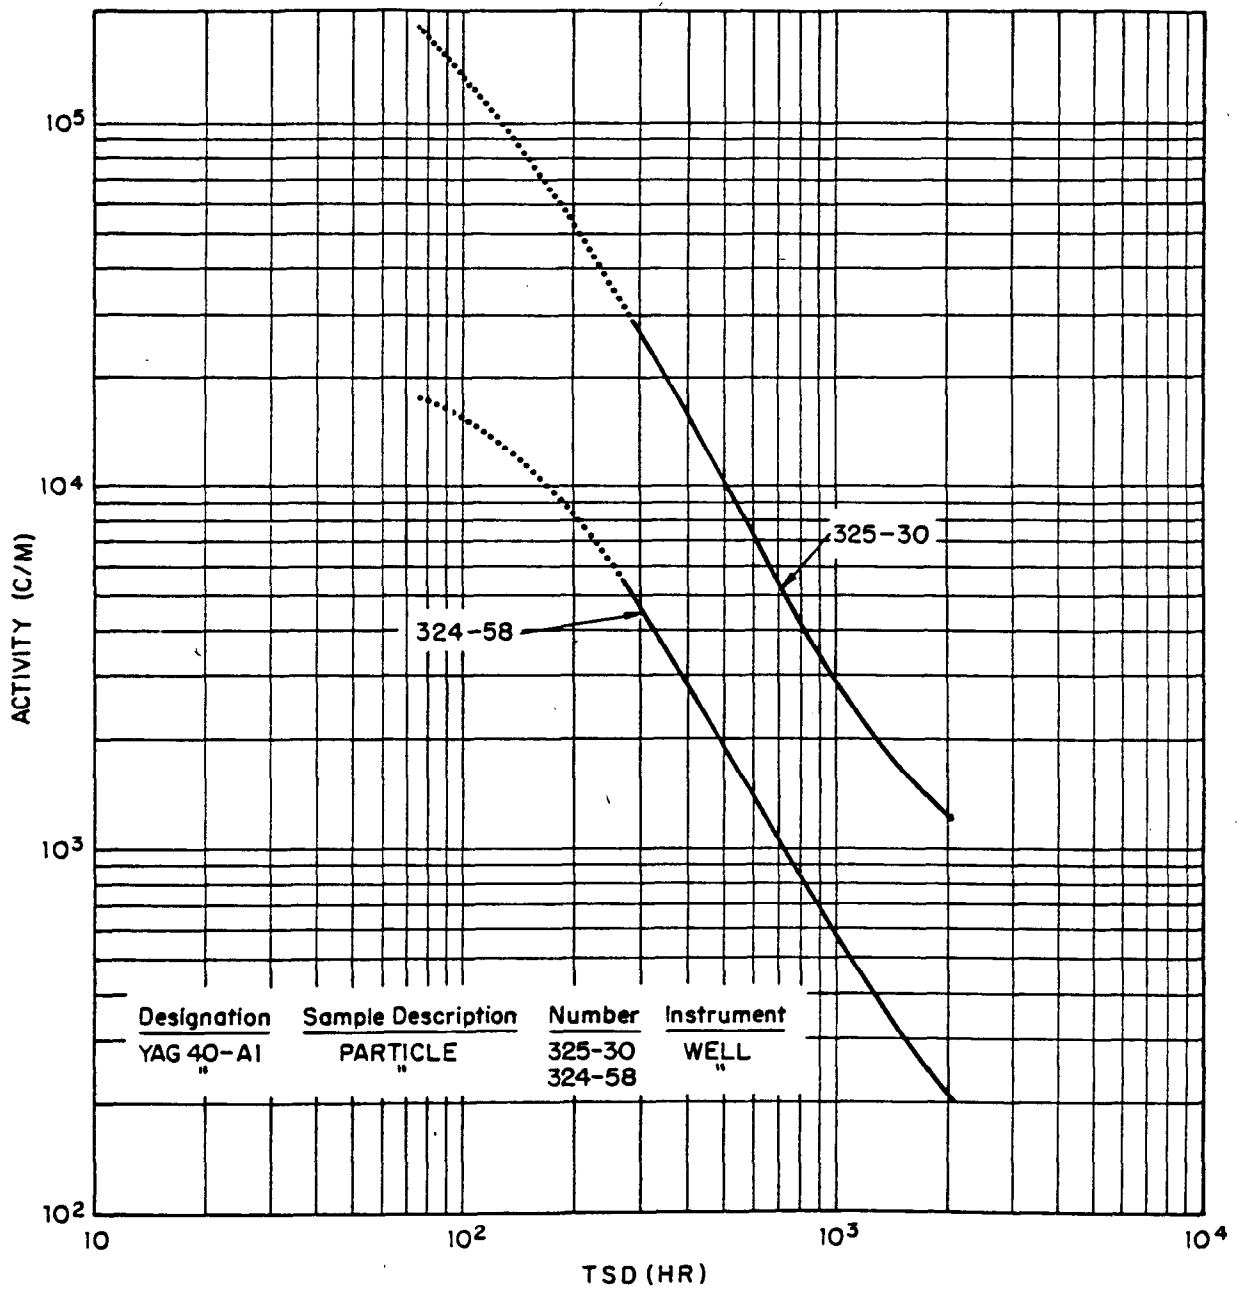


Figure B.2 Gamma decays of solid fallout particles, Shot Zuni.

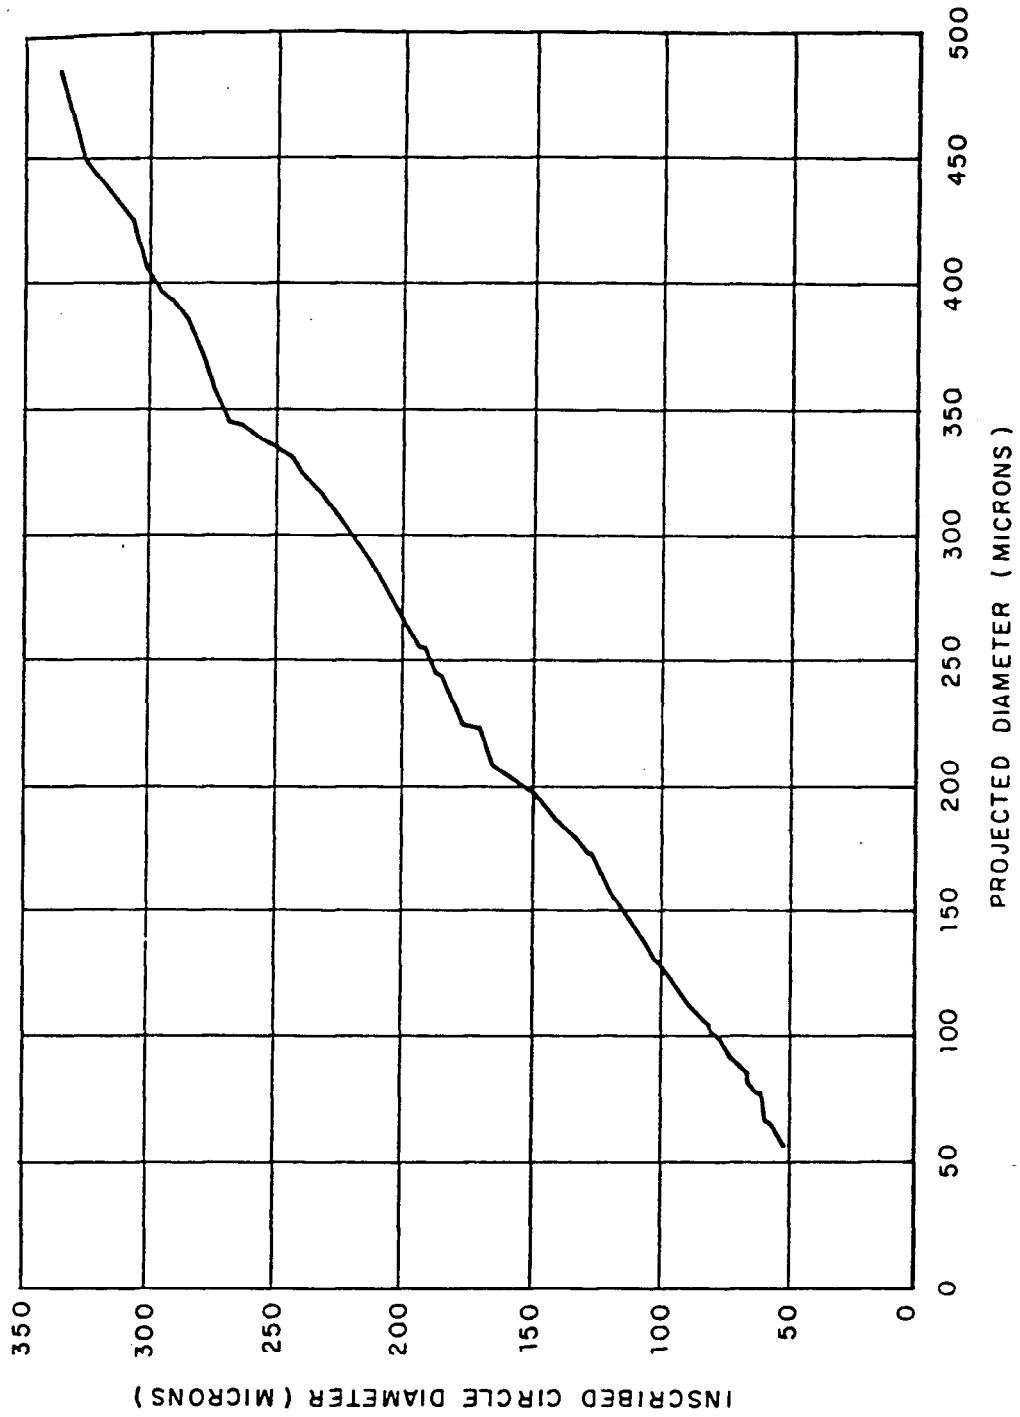


Figure B.5 Relation of inscribed to projected particle diameter.

pg 264 and 265 DELETED

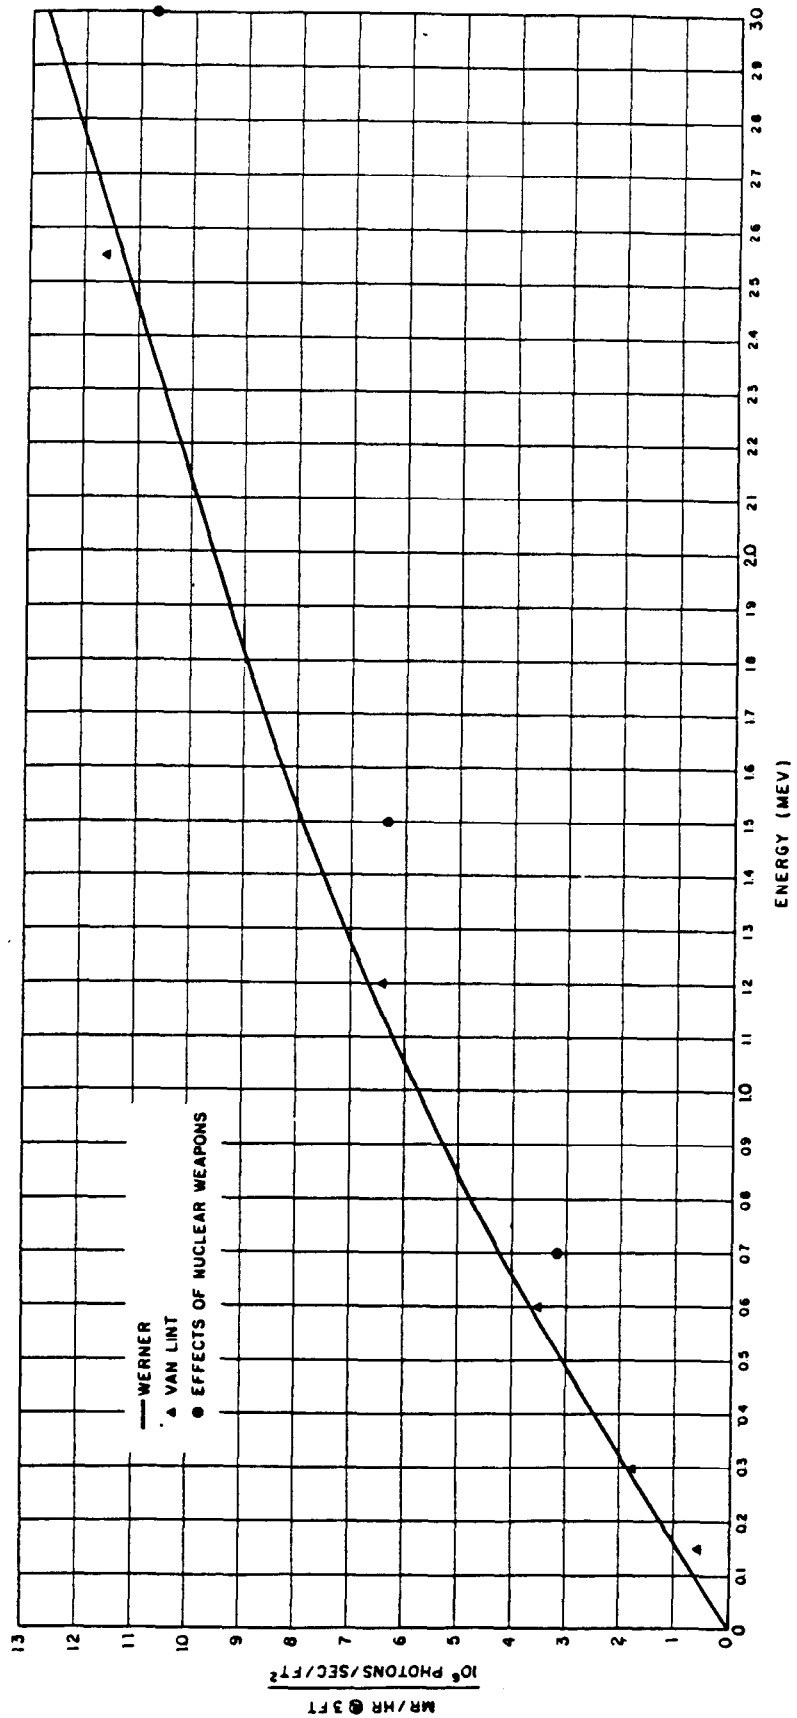


Figure B.6 Computed gamma-ionization rate above a uniformly contaminated smooth infinite plane.

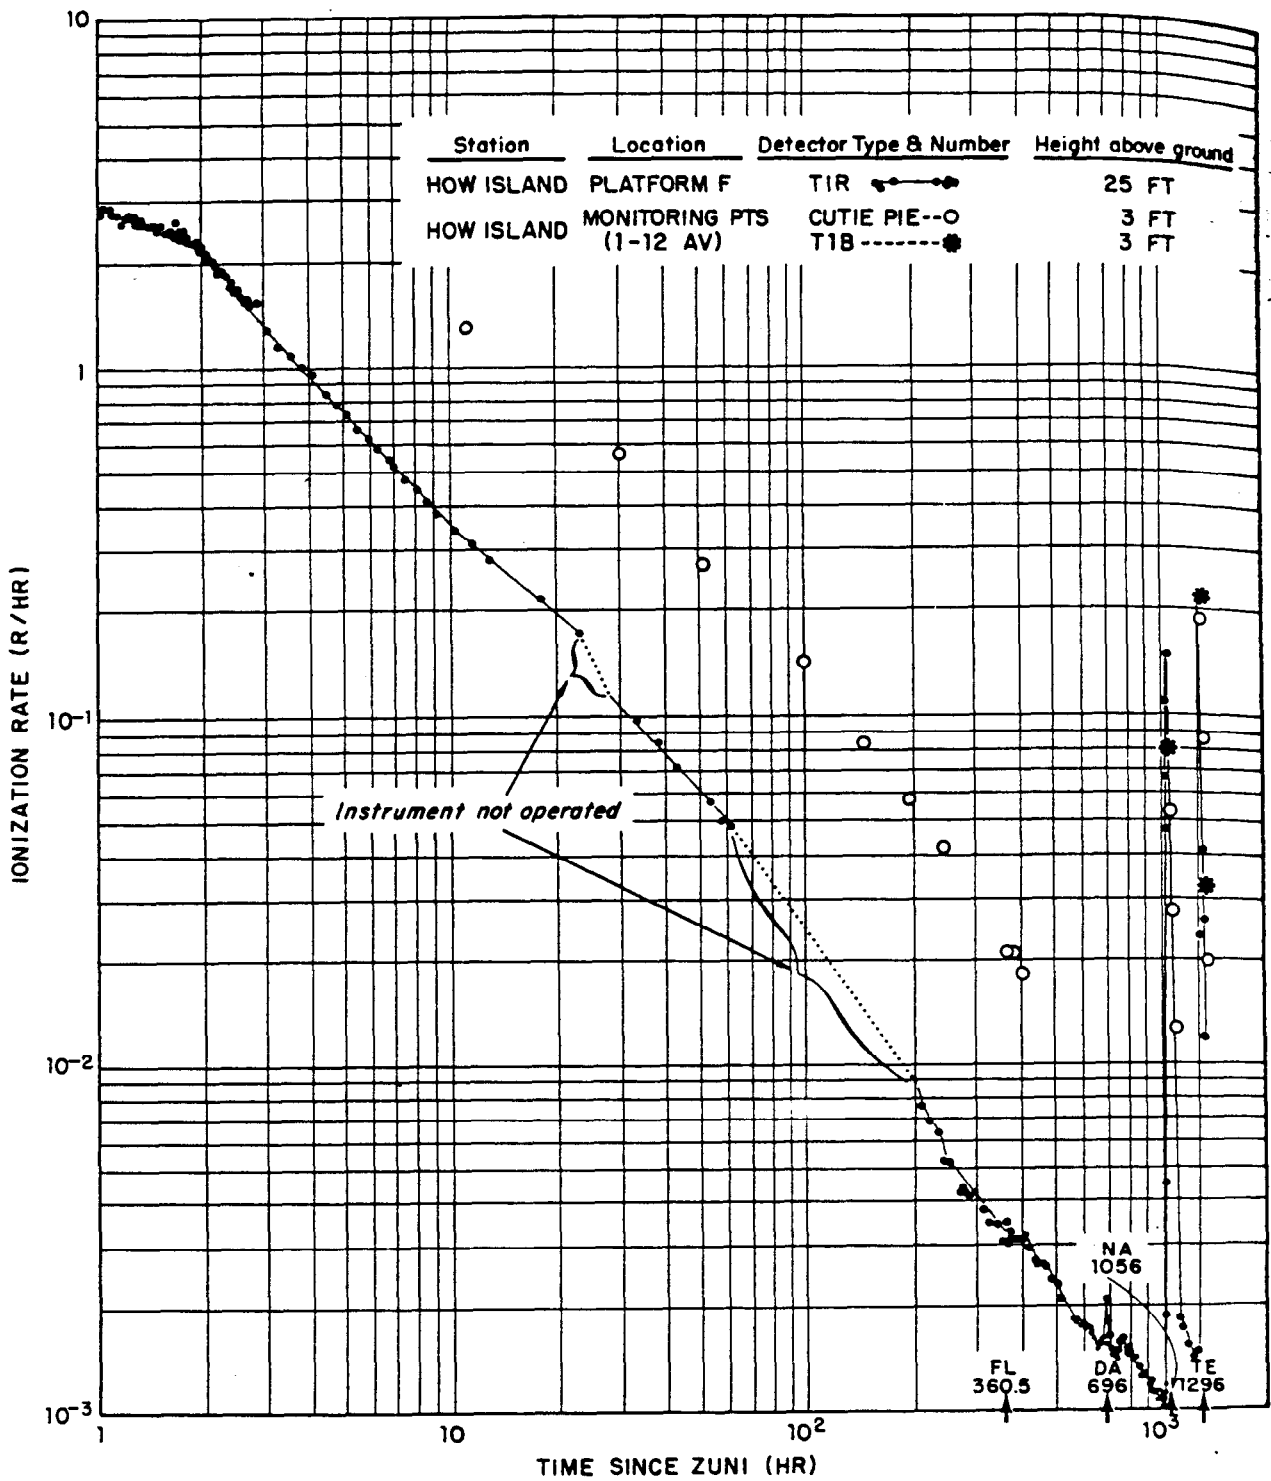


Figure B.7 Gamma-ionization-decay rate, Site How.

B.3 CORRELATIONS DATA

TABLE B.29 SAMPLE CALCULATIONS OF PARTICLE TRAJECTORIES

AVAILABLE DATA, SHOT ZUNI

1. Constant-level charts of the wind field (isogon-isotach analysis), Reference 70.

Altitude feet	Time hours
10,000	H-3, H+9, H+21, H+33
16,000	H-3, H+9, H+21, H+33
25,000	H-3, H+9, H+21, H+33
30,000	H-3, H+9, H+21, H+33
40,000	H-3, H+9, H+21, H+33
50,000	H-3, H+9, H+21, H+33
80,000	H-3, H+9, H+21, H+33

2. Vertical-motion charts of the wind field (computed values), Reference 71.

Altitude feet	Time hours
2,000	H-3, H+3, H+9, H+15, H+21, H+27, H+33
10,000	H-3, H+3, H+9, H+15, H+21, H+27, H+33
20,000	H-3, H+3, H+9, H+15, H+21, H+27, H+33
30,000	H-3, H+3, H+9, H+15, H+21, H+27, H+33
40,000	H-3, H+3, H+9, H+15, H+21, H+27, H+33
50,000	H-3, H+3, H+9, H+15, H+21, H+27, H+33

3. Measured winds aloft at Bikini, Eniwetok, and Rongerik Atolls, Reference 70.

COMPUTATION OF PARTICLE TRAJECTORIES

1. Considering time-and-space variation of the wind field:

- a. Shot Zuni; particle size, 75 μ ; originating altitude, 60,000 feet; assume 3-hr persistence of wind field.
- b. Latitude and longitude of particle: 11° 30' N 165° 22' E at 0 time.
- c. Time to fall 5,000 feet (60,000 to 55,000): 1.16 hours.
- d. 5,000-foot zonal wind (60,000 to 55,000), (time and space variation insignificant), 160 degrees, 17 knots.
- e. Compute trajectory projection of particle through layer (used plotting device, Reference 68).
- f. Plot Vector 1 (used plotting device).
- g. Latitude and longitude of particle at 55,000 feet: 11° 47' N 165° 14' E.
- h. Time to fall 5,000 feet (55,000 to 50,000): 1.16 hours.
- i. 5,000-foot zonal wind (55,000 to 50,000), (time and space variation insignificant), 240 degrees, 25 knots.
- j. Compute trajectory projection of particle through layer (used plotting device).
- k. Add Vector 2 to end of vector 1 on plot (used plotting device).
- l. Latitude and longitude of particle at 50,000 feet: 12° 02' N 165° 41' E.
- m. Time to fall 5,000 feet (50,000 to 45,000): 1.21 hours.

n. Interpolation for time-and-space variation of winds from constant level charts:

- (1) Chart 1, H-3 hours, 50,000 feet, 12° 02' N, 165° 41' E : wind 250 degrees, 38 knots.
 - (2) Chart 2, H-3 hours, 40,000 feet, 12° 02' N, 165° 41' E : wind 240 degrees, 37 knots.
 - (3) Interpolated value of wind in layer 50,000 to 45,000 feet: 245 degrees, 38 knots at H-3 hours (to nearest 5 degrees).
 - (4) Chart 3, H+9 hours, 50,000 feet, 12° 02' N, 165° 41' E : wind 235 degrees, 30 knots.
 - (5) Chart 4, H+9 hours, 40,000 feet, 12° 02' N, 165° 41' E : wind 210 degrees, 40 knots.
 - (6) Interpolated value of wind in layer 50,000 to 45,000 feet: 230 degrees, 32 knots at H+9 hours (to nearest 5 degrees).
 - (7) Final interpolated value of wind in layer 50,000 to 45,000 feet: 240 degrees, 37 knots at H+3 hours (to nearest 5 degrees).
 - o. Compute trajectory projection of particle through layer using final wind in N-7 (used plotting device).
 - p. Add Vector 3 to end of vector 2 on plot (used plotting device).
 - q. Continue the above computations until particle reaches surface.
2. Considering time-and-space variation of the wind field as well as vertical motions:
- a. Shot Zuni; particle size, 75 μ ; originating altitude, 60,000 feet; assume 3-hour persistence of wind field.
 - b. Latitude and longitude of particle: 11° 30' N, 165° 22' E at 0 time.
 - c. From computed vertical motion charts, determine by interpolation, the value of the vertical wind through the 5,000-foot layer (60,000 to 55,000) at H+0 hours and 11° 30' N, 165° 22' E: -19.5 cm/sec.
 - d. From measured Bikini winds, obtain 5,000-foot zonal wind (60,000 to 55,000) at H+0 hours: 160 degrees, 17 knots.
 - e. Compute time to fall, 5,000 feet in still atmosphere (60,000 to 55,000): 1.16 hours.
 - f. Compute corrected time to fall by considering vertical motions (60,000 to 55,000), 0.78 hour.
 - g. Compute effective wind speed through layer by considering corrected time to fall, 53 percent increase in falling speed or 53 percent decrease in wind speed: 160 degrees, 11 knots.
 - h. Using effective wind speed and still air time to fall 5,000 feet, compute trajectory projection of particle through layer. (This reverse approach was used to implement plotting with plotting device.)
 - i. Plot Vector 1 (used plotting device).
 - j. Continue this process interpolating for vertical motions and wind velocity from charts, as a function of time, space, and altitude, until particle reaches surface.

TABLE B.29 CONTINUED

I. SPACE VARIATION AND TIME VARIATION OF THE WIND FIELD

Altitude Increment	Time Through	Cumulative Time	Latitude of Particle (from Plot) Surface Zero		Longitude		Interpolation for Time-Space Variation of Winds													
			deg	min	deg	min	Chart 1 Time	Chart 1 Alt.	Chart 2 Time	Chart 2 Alt.	Interpolated Value	Chart 3 Time	Chart 3 Alt.	Chart 4 Time	Chart 4 Alt.	Interpolated Value	Final Value	Wind Velocity		
10 ³ ft	hrs	hrs	deg	min	deg	min	hrs	10 ³ ft	hrs	10 ³ ft		hrs	10 ³ ft	hrs	10 ³ ft		deg	knots		
Shot Zuni																				
Particle size, 75 microns																				
Originating altitude, 80,000 feet																				
From																				
60 to 55	1.16	1.16	11	30	165	22	Use measured Bikini winds										160	17		
55 to 50	1.16	2.32	11	47	165	14	Use measured Bikini winds										240	25		
50 to 45	1.21	3.53	12	02	165	41	H-3	50	H-3	40	0.75	H+9	50	H+9	40	0.75	230	32	240	37
								250/38		240/37	245	38	235/30		210/40					
45 to 40	1.28	4.79	12	24	166	19	H-3	50	H-3	40	0.25	H+9	50	H+9	40	0.25	220	37	230	36
								250/33		240/37	240	36	235/30		215/40					
40 to 35	1.32	6.11	12	53	166	54	H-3	40	H-3	30	0.75	H+9	40	H+9	30	0.75	225	33	225	33
								240/38		210/20	230	33	220/40		240/12					
35 to 30	1.37	7.48	13	22	167	24	H-3	40	H-3	30	0.25	H+9	40	H+9	30	0.25	235	20	230	22
								250/40		220/20	230	25	225/45		240/12					
30 to 25	1.42	8.90	13	40	167	47	H-3	30	H-3	25	0.5	H+9	30	H+9	25	0.5	237	11	230	12
								220/20		200/12	210	16	240/12		235/10					
25 to 20	1.46	10.36	13	50	168	01						H+9	25	H+9	16	0.75	190	12	190	12
													235/10		070/18					
20 to 15	1.51	11.87	14	07	168	05						H+9	25	H+9	16	0.25	100	15	100	15
													235/10		070/18					
15 to 10	1.54	13.41	14	12	167	42	H+9	16	H+9	10	0.5	H+21	16	H+21	10	0.5	100	16	080	14
								070/15		080/12	075	13	110/17		090/16					
10 to 5	1.58	14.99	14	07	167	21	H+9	10			1.0	H+21	10			1.0	090	16	090	13
								090/12				090	12	090/16						
5 to 0	1.62	16.61	14	07	167	01	H+9	10			1.0	H+21	10			1.0	090	16	090	13
								090/12				090	12	090/16						

TABLE B.29 CONTINUED

Altitude Increment	Time Through	Cumulative Time	Latitude		Longitude		Interpolation for Time-Space Variation of Winds											
			of Particle (from Plot) Surface Zero				Chart 1		Chart 2		Interpolated Value	Chart 3		Chart 4		Interpolated Value	Final Value Wind Velocity	
10 ³ ft	hrs	hrs	deg	min	deg	min	hrs	10 ³ ft	hrs	10 ³ ft	hrs	10 ³ ft	hrs	10 ³ ft	hrs	10 ³ ft	deg	knots
Shot Zuni																		
Particle size, 100 microns																		
Originating altitude, 60,000 feet																		
From																		
60 to 55		0.64	11	30	165	22												
55 to 50		1.29																
50 to 45		1.97	11	47	165	33	H-3 50		H-3 40	0.75	H+9 50		H+9 40		0.75	0.25		
							250/33		240/35	245 33	235/30		210/40		230 32	240	33	
45 to 40		2.68	11	58	165	51	H-3 50		H-3 40	0.25	H+9 50		H+9 40		0.25	0.25		
							250/33		240/35	240 34	235/30		210/40		215 38	235	35	
40 to 35		3.42	12	12	166	12	H-3 40		H-3 30	0.75	H+9 40		H+9 30		0.75	0.50		
							250/36		205/21	240 30	215/40		230/11		220 33	230	32	
35 to 30		4.20	12	27	116	30	H-3 40		H-3 30	0.25	H+9 40		H+9 30		0.25	0.50		
							250/38		215/20	225 25	220/40		240/12		235 20	230	22	
30 to 25		4.99	12	38	166	42	H-3 30		H-3 25	0.5	H+9 30		H+9 25		0.5	0.5		
							215/20		215/20	215 20	240/12		235/12		235 12	225	16	
25 to 20		5.81	12	48	166	50	H-3 25		H-3 16	0.75	H+9 25		H+9 16		0.75	0.5		
							190/14		120/05	135 12	225/06		080/16		195 08	165	16	
20 to 15		6.66	12	55	166	49	H-3 25		H-3 16	0.25	H+9 25		H+9 16		0.25	0.75		
							190/14		120/05	135 07	225/06		080/16		115 14	120	13	
15 to 10		7.55	13	00	166	39	H-3 16		H-3 10	0.5	H+9 16		H+9 10		0.5	0.75		
							120/05		090/20	105 12	080/16		090/15		085 15	090	14	
10 to 5		8.48	13	00	166	27	H-3 10		—	1	H+9 10		—		1	0.75		
							090/20		—	090 20	090/15		—		090 15	090	16	
							H-3 10		—	1	H+9 10		—		1	0.75		
5 to 0		9.45	13	00	166	12	090/20		—	090 20	090/15		—		090 15	090	16	

TABLE B.29 CONTINUED
II. VERTICAL MOTIONS AND WIND SPEED AND DIRECTION

Alt. Increment	Latitude		Longitude		TSD	Interpolation for Determining Vertical Motion					Interpolation for Time-Space Variation of Winds										
	of Particle (from Plot)	Ground Zero	deg	min		hrs	Chart 1 Time: hrs Alt: 10 ³ ft	Chart 2	Interpolated Value	Chart 3 Time: hrs Alt: 10 ³ ft	Chart 4	Interpolated Value	Final Value	Chart 1 Time: hrs Alt: 10 ³ ft	Chart 2	Interpolated Value	Chart 3 Time: hrs Alt: 10 ³ ft	Chart 4	Interpolated Value	Final Value	
10 ³ ft	deg	min	deg	min	hrs	cm/sec		cm/sec	cm/sec		cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	deg	kts
Shot Zuni																					
Particle size, 75 microns																					
Originating altitude, 60,000 feet																					
From																					
60 to 55	11	30	165	22	0	H-3 50	—	1	H+3 50	—	1	0.5	Use measured Bikini winds								
						-32	—	-32	-7	—	-7	-19.5									
55 to 50	11	41	165	18	0.76	H-3 50	—	1	H+3 50	—	1	0.5	Use measured Bikini winds								
						-33	—	-33	-7	—	-7	-20									
50 to 45	11	50	165	34	1.51	H-3 50	H-3 40	0.75	H+3 50	H+3 40	0.75	0.50	H-3 50	H-3 40	0.75	H+9 50	H+9 40	0.75	0.25	234	34
						-31	-22	-28.3	-5	-2.5	-4.3	-16.3	240/35	230/37	237 35	230/30	210/40	225 32	234 34		
45 to 40	12	07	165	57	2.34	H-3 50	H-3 40	0.25	H+3 50	H+3 40	0.25	0.50	H-3 50	H-3 40	0.25	H+9 50	H+9 40	0.25	0.25		
						-24	-18	-20	-2	±0	0	-10	250/34	240/37	242 39	240/31	215/42	220 39	235 39		
40 to 35	12	28	166	28	3.31	H+3 40	—	1	H+3 30	—	1	0.75	H-3 40	H-3 30	0.75	H+9 40	H+9 30	0.75	0.5		
						±0	—	±0	+2	—	+2	±0	245/36	210/20	235 32	220/45	240/12	225 39	230 35		
35 to 30	12	57	167	03	4.63	H+3 40	—	1	H+3 30	—	1	0.25	H-3 40	H-3 30	0.25	H+9 40	H+9 30	0.25	0.5		
						+6	—	+6	+6	—	+6	+6	250/38	210/20	220 25	220/45	235/12	230 20	225 22		
30 to 25	13	23	167	28	6.34	H+3 30	H+3 20	0.75	H+9 30	H+9 20	0.75	0.50	H-3 30	H-3 25	0.5	H+9 30	H+9 25	0.5	0.75		
						+9	+10	+9	-13	-3	-10	±0	210/18	200/12	205 15	235/13	240/10	237 11	230 11		
25 to 20	13	32	167	38	7.76	H+3 30	H+3 20	0.25	H+9 30	H+9 20	0.25	0.60	H-3 25	H-3 18	0.75	H+9 25	H+9 16	0.75	0.75		
						+10	+10	+10	-13	-3	-5	+3	200/12	120/5	180 10	240/10	075/17	185 12	185 12		
20 to 15	13	50	167	41	9.38	H+9 20	—	1	H+9 10	—	1	0.75	H+9 25	—	1	H+9 16	—	1	0.25		
						-3	—	-3	-3	—	-3	-3	240/10	—	240 10	075/17	—	075 17	115 15		
15 to 10	13	58	167	22	10.74	H+9 20	—	1	H+9 10	—	1	—	H+9 18	—	1	H+9 10	—	1	0.5		
						-3	—	-3	-3	—	-3	-3	075/17	—	075 17	085/12	—	085 12	080 14		
10 to 5	13	55	167	04	12.13	H+9 10	H+9 2	0.75	H+15 10	H+15 2	0.75	0.50	H+9 10	—	1	H+21 10	—	1	0.25		
						-3	+0.5	-2	-7	-15	-9	-8	085/12	—	085 12	090/17	—	090 17	085 13		
						H+9 2	—	1	H+15 2	—	1	0.5	H+9 10	—	1	H+21 10	—	1	0.25		
5 to 0	13	53	166	47	13.42	0.5	—	+0.5	-15	—	-15	-7	085/12	—	085 12	090/17	—	090 17	085 13		

TABLE B.29 CONTINUED

Alt. Increment	Latitude of Particle (from Plot)	Longitude	TSD	Interpolation for Determining Vertical Motions						Interpolation for Time-Space Variation of Winds							
				Chart 1 Time: hrs Alt: 10 ³ ft	Chart 2	Interpolated Value	Chart 3 Time: hrs Alt: 10 ³ ft	Chart 4	Interpolated Value	Final Value	Chart 1 Time: hrs Alt: 10 ³ ft	Chart 2	Interpolated Value	Chart 3 Time: hrs Alt: 10 ³ ft	Chart 4	Interpolated Value	Final Value Wind Velocity
10 ³ ft	deg min	deg min	hrs	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	deg kts	
Shot Zuni																	
Particle size, 100 microns																	
Originating altitude, 60,000 feet																	
From																	
60 to 55	11 30	165 22	0	H-3 50	—	1	H+3 50	—	1	0.5	Use measured Bikini winds						
				-32	—	-32	-7	—	-7	-19.5							
55 to 50	11 38	165 19	0.49	H-3 50	—	1	H+3 50	—	1	0.5	Use measured Bikini winds						
				-32	—	-32	-7	—	-7	-19.5							
50 to 45	11 44	165 30	0.89	H-3 50	H-3 40	0.75	H+3 50	H+3 40	0.75	0.50	H-3 50	H-3 40	0.75	H+9 50	H+9 40	0.75	0.25
				-31	-20	-29	-5	-3	-5	-17.0	240/32	240/35	240 33	235/30	210/40	230 33	237 33
45 to 40	11 53	165 44	1.52	H-3 50	H-3 40	0.25	H+3 50	H+3 40	0.25	0.50	H-3 50	H-3 40	0.25	H+9 50	H+9 40	0.25	0.25
				-30	-20	-22	-3	-2	-2	-12.0	240/32	240/35	240 34	235/30	210/40	215 37	235 35
40 to 35	12 05	166 02	2.11	H-3 40	H-3 30	0.75	H+3 40	H+3 30	0.75	0.50	H-3 40	H-3 30	0.75	H+9 40	H+9 30	0.75	0.25
				-17	-4	-13	0	0	0	-7	240/35	210/21	235 31	210/40	220/12	212 33	230 31
35 to 30	12 18	166 18	2.77	H-3 40	H-3 30	0.25	H+3 40	H+3 30	0.25	0.50	H-3 40	H-3 30	0.25	H+9 40	H+9 30	0.25	0.25
				-15	-5	-6	+3	+2	+2	-3	240/35	210/20	220 24	210/40	240/10	230 17	222 22
30 to 25	12 30	166 28	3.51	H+3 30	H+3 20	0.75	—	—	—	1	H-3 30	H-3 25	0.5	H+9 30	H+9 25	0.5	0.5
				+3	+7	+4	—	—	—	+4	210/20	180/15	195 17	240/10	210/10	225 10	210 13
25 to 20	12 37	166 33	4.36	H+3 30	H+3 20	0.25	—	—	—	1	H-3 25	H-3 16	0.75	H+9 25	H+9 16	0.75	0.5
				+3	+7	+6	—	—	—	+6	180/15	120/5	165 13	210/10	080/15	150 11	160 12
20 to 15	12 48	166 30	5.29	H+3 20	H+3 10	0.75	—	—	—	1	H-3 25	H-3 16	0.25	H+9 25	H+9 16	0.25	0.50
				+7	+5	+6	—	—	—	+6	180/15	120/5	135 7	210/10	080/15	120 14	125 12
15 to 10	12 55	166 20	6.26	H+3 20	H+3 10	0.25	H+9 20	H+9 10	0.25	0.50	H-3 16	H-3 10	0.5	H+9 16	H+9 10	0.5	0.75
				+7	+5	+5	-1	-2	-2	+1	140/5	095/20	120 12	080/17	090/15	085 16	095 15
10 to 5	12 56	166 07	7.17	H+3 10	H+3 2	0.75	H+9 10	H+9 2	0.75	0.5	H-3 10	—	1	H+9 10	—	1	0.75
				+5	0	+3	-2	+0.5	0	+2	095/20	—	095 20	090/15	—	090 15	090 16
5 to 0	12 56	165 51	8.14	H+3 2	—	1	H+9 2	—	1	0.5	H-3 10	—	1	H+9 10	—	1	0.75
				0	—	0	0.6	—	0.6	0.3~0	095/20	—	095 20	090/15	—	090 15	090 16

274

TABLE B. 29 CONTINUED

Alt. Increment	Latitude of Particle (from Plot)		Longi-tude	TSD	Interpolation for Determining Vertical Motions					Interpolation for Time-Space Variation of Winds					Final Value Wind Velocity					
	deg	min			deg	min	hrs	Chart 1 Time: hrs Alt: 10 ³ ft	Chart 2 Interpo-lated Value	Interpo-lated Value	Chart 3 Time: hrs Alt: 10 ³ ft	Chart 4 Interpo-lated Value	Final Value	Chart 1 Time: hrs Alt: 10 ³ ft		Chart 2 Interpo-lated Value	Interpo-lated Value	Chart 3 Time: hrs Alt: 10 ³ ft	Chart 4 Interpo-lated Value	Interpo-lated Value
10 ³ ft	deg	min	deg	min	hrs	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	cm/sec	deg	knots
Shot Zuni																				
Particle size, 200 microns																				
Originating altitude, 60,000 feet																				
From																				
60 to 55	11	30	165	22	0	H-3 50	—	1	H+3 50	—	1	0.5	Use measured Bikini winds							
						-33	—	-33	-7	—	-7	-20								
55 to 50	11	32	165	21	0.19	H-3 50	—	1	H+3 50	—	1	0.5	Use measured Bikini winds							
						-33	—	-33	-7	—	-7	-20								
50 to 45	11	35	165	28	0.39	H-3 50	H-3 40	0.75	H+3 50	H+3 40	0.75	0.50	H-3 50	H-3 40	0.75	H+9 50	H+9 40	0.75	0.25	0.25
						-33	-20	-29	-6	-5	-6	-18	240/32	240/35	240 33	230/30	205/40	225 32	235 33	
45 to 40	11	39	165	31	0.61	H-3 50	H-3 40	0.25	H+3 50	H+3 40	0.25	0.50	H-3 50	H-3 40	0.25	H+9 50	H+9 40	0.25	0.25	0.25
						-31	-20	-23	-5	-3	-4	-14	240/32	240/35	240 34	230/30	205/40	210 38	230 35	
40 to 35	11	44	165	37	0.85	H-3 40	H-3 30	0.75	H+3 40	H+3 30	0.75	0.50	H-3 40	H-3 30	0.75	H+9 40	H+9 30	0.75	0.25	0.25
						-20	-2	-14	-2	-1	-2	-8	240/35	205/21	230 32	205/40	200/12	205 33	225 32	
35 to 30	11	49	165	43	1.12	H-3 40	H-3 30	0.25	H+3 40	H+3 30	0.25	0.50	H-3 40	H-3 30	0.25	H+9 40	H+9 30	0.25	0.25	0.25
						-20	-2	-7	-2	-1	-1	-4	240/35	205/21	215 24	205/40	200/12	201 19	205 20	
30 to 25	11	54	165	45	1.41	H-3 30	H-3 20	0.75	H+3 30	H+3 20	0.75	0.50	H-3 30	H-3 25	0.5	H+9 30	H+9 25	0.5	0.25	0.25
						-2	-3	-2	-2	+6	0	-1	205/21	150/14	175 17	200/12	200/07	200 09	180 15	
25 to 20	11	58	165	45	1.73	H-3 30	H-3 20	0.25	H+3 30	H+3 20	0.25	0.50	H-3 25	H-3 18	0.75	H+9 25	H+9 18	0.75	0.25	0.25
						-2	-3	-3	-2	+6	+3	0	150/14	120/10	140 13	200/07	085/15	165 09	145 12	
20 to 15	12	02	165	43	2.07	H-3 20	H-3 10	0.75	H+3 20	H+3 10	0.75	0.50	H-3 25	H-3 18	0.25	H+9 25	H+9 16	0.25	0.25	0.25
						-3	-4	-3	+5	+7	+5	+1	150/14	120/10	125 11	200/07	085/15	115 13	120 11	
15 to 10	12	04	165	40	2.43	H-3 20	H-3 10	0.25	H+3 20	H+3 10	0.25	0.50	H-3 18	H-3 10	0.5	H+9 18	H+9 10	0.5	0.25	0.25
						-3	-4	-4	+5	+7	+7	+8	120/10	090/21	105 15	085/15	090/18	085 17	100 18	
10 to 5	12	05	165	34	2.83	H-3 10	H-3 2	0.75	H+3 10	H+3 2	0.75	0.50	H-3 10	—	1	H+9 10	—	1	0.25	0.25
						-4	-7	-5	+7	+0	+5	+0	090/21	—	090 21	090/18	—	090 18	090 20	
5 to 0	12	05	165	28	3.23	H-3 2	—	1	H+3 2	—	1	0.5	H-3 10	—	1	H+9 10	—	1	0.25	0.25
						-7	—	-7	0	—	0	-3	090/21	—	090 21	090/18	—	090 18	090 20	

TABLE B.29 CONTINUED
 III. SPACE VARIATION, TIME VARIATION, AND VERTICAL MOTIONS OF THE WIND FIELD

Altitude Increment	Time Through	Corrected Time Through	Cumulative Time	Wind Velocity	Vertical Motion	Remarks on Vertical Motion	Correction for Falling Speed	Effective Wind Velocity		
10 ³ ft	hrs	hrs	hrs	deg knots	cm/sec	ft	pct	deg knots		
Shot Zuni										
Particle size, 75 microns										
Originating altitude, 60,000 feet										
From										
60 to 55	1.16	0.76	0.76	160	17	-19.5	}50,000 chart only	160	11	
55 to 50	1.16	0.75	1.51	240	25	-20		54.6	240	16
50 to 45	1.21	0.83	2.34	234	34	-16.3		46.6	234	23
45 to 40	1.26	0.97	3.31	235	39	-10		30	235	30
40 to 35	1.32	1.32	4.63	230	35	±0		0	230	35
35 to 30	1.37	1.71	6.34	225	22	+6		20	225	27
30 to 25	1.42	1.42	7.76	230	11	±0		0	230	11
25 to 20	1.46	1.62	9.38	185	12	+3		10	185	13
20 to 15	1.51	1.36	10.74	115	15	-3		11	115	13
15 to 10	1.54	1.39	12.13	080	14	-3		11	080	13
10 to 5	1.58	1.29	13.42	085	13	-6	22	085	11	
5 to 0	1.62	1.27	14.69	085	13	-7	27	085	10	
Shot Zuni										
Particle size, 100 microns										
Originating altitude, 60,000 feet										
From										
60 to 55	0.64	0.49	0.49	160	17	-19.5	}50,000 chart only	160	13	
55 to 50	0.65	0.50	0.99	240	25	-19.5		30	240	19
50 to 45	0.68	0.53	1.52	237	33	-17.0		27	237	26
45 to 40	0.71	0.59	2.11	235	35	-12.0		20	235	29
40 to 35	0.74	0.66	2.77	230	31	-7		12	230	28
35 to 30	0.78	0.74	3.51	222	22	-3		5	222	21
30 to 25	0.79	0.85	4.36	210	13	+4		7	210	14
25 to 20	0.82	0.93	5.29	160	12	+6		12	160	14
20 to 15	0.85	0.97	6.26	125	12	+6		12	125	14
15 to 10	0.89	0.91	7.17	095	15	+1		2	095	15
10 to 5	0.93	0.97	8.14	090	16	+2	4	090	17	
5 to 0	0.97	0.97	9.11	090	16	0	0	090	16	
Shot Zuni										
Particle size, 200 microns										
Originating altitude, 60,000 feet										
From										
60 to 55	0.21	0.19	0.19	160	17	-20	}50,000 charts only	160	14	
55 to 50	0.22	0.20	0.39	240	25	-20		11	240	23
50 to 45	0.24	0.22	0.61	235	33	-18		10	235	30
45 to 40	0.26	0.24	0.85	230	35	-14		8.5	230	32
40 to 35	0.28	0.27	1.12	225	32	-8		5	225	30
35 to 30	0.30	0.29	1.41	205	20	-4		3	205	19
30 to 25	0.32	0.32	1.73	180	15	-1		1	180	15
25 to 20	0.34	0.34	2.07	145	12	±0		0	145	12
20 to 15	0.36	0.36	2.43	120	11	+1		1	120	11
15 to 10	0.38	0.40	2.83	100	16	+6		5.5	100	17
10 to 5	0.40	0.40	3.23	090	20	±0	0	090	20	
5 to 0	0.42	0.41	3.64	090	20	-3	3	090	19	

TABLE B.30 RADIOCHEMICAL ANALYSIS OF SURFACE SEA WATER AND YAG-39 DECAY-TANK SAMPLES

Shot	Bottle Number	Designator	Time of Collection H+hr	Location		Fission/ml	Fission/ft ³
				Latitude N deg min	Longitude E deg min		
Zuni	8030	Y3-S-1B	26.1	13 00	165 11	1.94×10^7	5.49×10^{11}
	8035	Y3-T-1B	26.4	—	—	3.28×10^7	9.29×10^{11}
	8254	Y4-S-1B	16.1	12 25	165 26	8.20×10^7	2.32×10^{12}
Flathead	8544	Y3-S-1B	13.8	12 04	165 26	3.85×10^8	1.09×10^{11}
	8549	Y3-T-1B	14.1	—	—	3.29×10^7	9.32×10^{11}
Navajo	8052	M-MS-5A	43.0	12 44.3	162 40	4.72×10^6	1.34×10^{11}
	8053	M-MS-5B	43.0	12 44.3	162 40	5.97×10^6	1.69×10^{11}
	8241	M-MS Sta. 10	-39.6	11 41	165 11.5	2.88×10^6	8.16×10^{10}
	8242	M-MS Sta. 11	34.4	11 34.5	164 44.1	5.62×10^6	1.59×10^{10}
	8581	Y3-S-3B	18.2	11 59.5	165 15.5	4.16×10^7	1.18×10^{12}
	8585	Y3-T-3B	18.3	—	—	1.64×10^8	4.64×10^{12}
Tewa	8289	Y4-S-2B-T	18.0	12 06.0	165 00.5	9.97×10^8	2.82×10^{13}
	8326	Y3-S-1B-T	11.0	12 00.5	165 18	6.84×10^8	1.94×10^{13}
	8350	Y3-T-1B-T	52.0	—	—	1.15×10^{10}	3.26×10^{14}

* Estimated reliability \pm 25 to 50 pct.

TABLE B.31 RAINFALL-COLLECTION RESULTS

Collections were made in the trays of the OCC's and AOC₁'s on the standard platform of the LST-611 (Station D, Figure A.1) while the ship was berthed at the San Francisco Naval Shipyard, Hunters Point (No.24). Simultaneously, collections were made in two rectangular arrays of 12 identical trays located at the end of the adjacent pier and in a flat unobstructed area on the ground about 2,200 feet northwest of the ship. Winds were measured continuously on the tops of two buildings in the area (Nos. 815 and 511) and accompanying rainfall measurements were made on one (No. 815); a few readings were made with a hand-held instrument on the pilot house of the ship. At regular intervals the contents of the trays were emptied directly into a container graduated in milliliters; all values for a given array were later averaged and standard deviations computed. Weighted-average wind velocities were calculated by averaging the separate wind measurements, assigning weights to the different intervals on the basis of the parallel rainfall measurements, and averaging the resulting values.

Rainfall Period		Weighted Average Wind Velocity		Rainfall catch ml/2.60 ft ²								
				Platform Array (LST-611)			Non-Platform Array		LST Average	LST Maximum		
From	To	Degrees	Knots	Min	Max	Average	Ground Average	Pier Average	Ground Average	Ground Average		
3/29	0130	3/29	0315	200	2	450	520	483 ± 50	499 ± 25	470 ± 10	0.968 ± 0.111	1.042 ± 0.052
4/13	1820	4/15	0800	210	26	397	910	551 ± 40	*	1,418 ± 242	0.389 ± 0.072 †	0.642 ± 0.110 †
4/16	1400	4/16	1900	170	13	150	385	252 ± 154	634 ± 60	505 ± 116	0.397 ± 0.246	0.607 ± 0.057
4/17	1250	4/17	1400	220	15	525	720	591 ± 188	345 †	922 ± 131	0.641 ± 0.223 †	0.781 ± 0.111 †
4/17	1830	4/17	2130	160	11	1,740	2,540	2,020 ± 520	242 ± 145	2,684 ± 145	0.837 ± 0.221	1.053 ± 0.063
5/1	2300	5/2	0130	200	11	500	760	617 ± 264	852 ± 143	813 ± 120	0.724 ± 0.333	0.892 ± 0.150
5/8	0205	5/8	0335	180	9	540	805	620 ± 255	759 ± 105	807 ± 84	0.817 ± 0.354	0.998 ± 0.138
5/8	1900	5/9	0030	190	9	150	410	263 ± 278	525 ± 87	378 ± 68	0.501 ± 0.536	1.085 ± 0.180
5/9	0930	5/9	1130	180	8	65	240	145 ± 143	744 ± 167	208 ± 107	0.697 ± 0.775 †	1.154 ± 0.594 †
5/11	1000	5/13	0700	180	5	110	375	220 ± 201	355 ± 315	248 ± 98	0.620 ± 0.790	1.056 ± 0.937
5/14	0300	5/14	0920	260	5	235	295	254 ± 46	296 ± 55	283 ± 55	0.858 ± 0.223	0.997 ± 0.185
5/14	1030	5/14	1100	270	4	235	320	262 ± 53	200 ± 14	283 ± 68	1.310 ± 0.280	1.600 ± 0.112
5/20	0930	5/20	2000	145 to 010	10	1,970	2,900	2,307 ± 919	4,220 ± 381	3,752 ± 358	0.547 ± 0.223	0.687 ± 0.062
										Mean =	0.716 ± 0.402	0.969 ± 0.327

* No value available.

† Missed beginning of rainfall.

‡ Pier value used for ground average.

B.4 UNREDUCED DATA

TABLE B.32 ACTIVITIES OF WATER SAMPLES

Type	Number	Location				Collection Time H + hr	Dip counts/2,000 ml	
		North Latitude		East Longitude			Net counts/min at H+hr	
		Deg	Min	Deg	Min			
Shot Cherokee, YAG 40								
Surface	8081	12	38	164	23.5	17.65	66	98.8
Surface	8082	12	38	164	23.5	17.65	66	96.8
Surface	8083	12	38	164	23.5	17.65	54	97.8
Sea Background	8078	12	43	164	39	2.65	5	99.3
Sea Background	8079	12	43	164	39	4.65	0	93.8
Sea Background	8080	12	43	164	39	4.65	6	97.4
Shot Cherokee, YAG 39								
Surface	8013	13	20	163	40	16.40	20	94.4
Surface	8014	13	20	163	40	16.40	15	94.6
Surface	8015	13	20	163	40	16.40	28	94.1
Sea Background	8010	13	20	163	40	3.98	1	94.9
Sea Background	8011	13	20	163	40	3.98	0	76.6
Sea Background	8012	13	20	163	40	3.98	8	96.9
Tank	8018	13	20	163	40	16.69	123	76.3
Tank	8019	13	20	163	40	16.69	120	99.3
Tank	8020	13	20	163	40	16.69	138	99.4
Tank Background	8007	13	20	163	40	3.90	9	99.6
Tank Background	8008	13	20	163	40	3.90	8	98.3
Tank Background	8009	13	20	163	40	3.98	3	98.9
Shot Cherokee, DE 365								
Surface	8173	14	42	161	55.5	61.97	537	150.2
Surface	8174	14	42	161	55.5	61.97	737	150.1
Shot Cherokee, DE 534								
Surface	8195	12	17	164	55	26.65	29	148.7
Surface	8196	12	11	165	00	28.48	39	148.8
Surface	8197	12	03	165	04	29.15	49	148.8
Surface	8198	11	59	165	06.5	29.38	43	149.0
Surface	8199	11	56	165	08	29.62	50	149.2
Surface	8200	11	53	165	10	29.85	41	149.3
Surface	8201	11	51	165	11	30.08	89	149.5
Surface	8202	11	48.5	165	12	30.28	108	150.3
Surface	8203	11	46	165	15	30.52	132	149.6
Surface	8204	11	43	165	15	30.75	226	149.7
Shot Cherokee, Horizon								
Depth 15 m	8127	13	43.5	164	05	32.15	0	297.3
Depth 30 m	8128	13	43.5	164	05	32.15	0	292.5
Depth 45 m	8129	13	43.5	164	05	32.15	18	287.2
Depth 60 m	8130	13	43.5	164	05	32.15	1	287.0
Depth 75 m	8131	13	43.5	164	05	32.15	3	287.6
Depth 85 m	8132	13	43.5	164	05	32.15	0	287.8
Depth 95 m	8133	13	43.5	164	05	32.15	0	288.1
Depth 100 m	8134	13	43.5	164	05	32.15	6	291.8
Depth 105 m	8135	13	43.5	164	05	32.15	0	288.2
Depth 115 m	8136	13	43.5	164	05	32.15	0	288.3
Surface	8107	15	23	163	05	46.98	22	147.2
Surface	8108	13	23	163	44	27.15	23	147.3
Surface	8109	13	23	163	44	27.15	12	147.4
Surface	8110	13	43.5	164	05	31.90	8	147.5
Surface	8111	14	36	164	14	61.15	1	148.0
Surface	8112	14	10.5	164	43	16.15	22	147.7
Surface	8113	13	44.5	165	13	68.09	29	147.9
Surface	8114	15	07.5	165	39	55.40	7	148.1
Surface	8115	13	18	165	40	72.15	43	148.5
Surface	8116	12	32	165	56	76.15	17	148.6

TABLE B.32 CONTINUED

Type	Number	Location				Collection Time H + hr	Dip counts/2,000 mi	
		North Deg	Latitude Min	East Deg	Longitude Min		Net counts/min at H + hr	
Shot Zuni, YAG 40								
Surface	8253	12	25	165	26	16.08	193,845	72.2
Surface	8254	12	25	165	26	16.08	248,266	72.5
Surface	8255	12	25	165	26	16.08	182,937	72.6
Surface	8258	12	22	165	27	17.08	153,510	149.8
Surface	8260	12	22	165	27	17.08	139,734	149.9
Surface	8259	12	22	165	27	17.08	136,300	150.1
Sea Background	8251	12	22	165	49	3.42	173	72.1
Sea Background	8252	12	22	165	49	3.42	5,997	72.1
Shot Zuni, YAG 39								
Surface	8029	13	00	165	11	26.08	4,949	147.8
Surface	8030	13	00	165	11	26.08	5,250	147.9
Surface	8031	13	00	165	11	26.08	5,825	147.9
Sea Background	8023	13	00	165	00	5.58	33	123.0
Sea Background	8024	13	00	165	00	5.58	0	147.3
Sea Background	8025	13	00	165	00	5.58	24	149.4
Sea Background	8026	13	00	165	00	5.58	8	149.6
Tank	8034	13	00	165	13	26.42	15,087	148.0
Tank	8035	13	00	165	13	26.42	21,732	148.2
Tank	8036	13	00	165	13	26.42	16,192	148.3
Tank Background	8027	13	00	165	00	5.33	17	147.5
Tank Background	8028	13	00	165	00	5.33	9	147.6
Shot Zuni, DE 365								
Surface	8301	11	27	165	08.2	7.08	313	240.2
Surface	8302	11	27	165	08.2	7.08	14	240.3
Surface	8303	11	45.1	165	08.2	10.92	3,870	240.4
Surface	8304	12	10	165	27.8	13.92	21,109	240.5
Surface	8305	12	13.8	165	53	18.33	3,311	240.5
Surface	8306	13	37	163	40.2	49.50	2,469	240.6
Surface	8307	13	37	163	40.2	49.50	2,710	241.5
Surface	8308	12	46.1	166	01.3	31.25	11,180	241.6
Surface	8309	12	52.7	165	45.2	67.08	4,965	241.7
Surface	8310	12	37.8	165	49.5	69.08	6,199	242.0
Surface	8313	12	33	164	40	77.25	11,409	242.3
Surface	8311	12	43.9	165	30.2	72.25	13,583	242.3
Surface	8314	12	33	164	40	77.25	11,503	242.3
Surface	8317	12	39.7	163	38	86.83	1,058	242.4
Surface	8312	12	33	165	09.4	74.58	36,688	242.5
Surface	8315	12	20	164	59.3	79.42	41,461	242.6
Surface	8316	12	10.3	164	50.8	80.67	885	242.6
Shot Zuni, DE 534								
Surface	8261	11	59	165	04	11.42	18,660	213.8
Surface	8262	11	59	165	04	11.42	17,341	214.1
Surface	8263	11	40.3	165	35.2	6.92	229	214.3
Surface	8264	11	40.3	165	35.2	6.92	318	214.6
Surface	8265	12	14.1	164	29	16.58	13,474	214.8
Surface	8266	12	14.1	164	29	16.58	12,533	215.0
Surface	8267	13	46	164	33	56.58	594	215.2
Surface	8268	13	46	164	33	56.58	8,656	215.3
Surface	8269	13	47	163	47	61.58	287	215.5
Surface	8270	12	44	165	59	90.33	10,043	215.6
Shot Zuni, Horizon								
Depth 2,000	8117	13	06.4	165	02	58.75	0	166.0
Depth 1,500	8118	13	06.4	165	02	58.75	20	166.1
Depth 1,000	8119	13	06.4	165	02	58.75	0	166.2
Depth 750	8120	13	06.4	165	02	58.75	7	166.4
Depth 500	8121	13	06.4	165	02	58.75	4	166.5
Depth 250	8122	13	06.4	165	02	58.75	15	166.6
Depth 150	8123	13	06.4	165	02	58.75	13	166.8
Depth 125	8124	13	06.4	165	02	58.75	31	167.0
Depth 90	8125	13	06.4	165	02	58.75	22	167.1
Depth 110	8126	13	06.4	165	02	58.75	27	167.2

TABLE B.32 CONTINUED

Type	Number	Location				Collection Time H+hr	Dip counts/2,000 ml		
		North Latitude		East Longitude			Net counts/min at H+hr		
		Deg	Min	Deg	Min				
Depth	10	8137	13	00	165	12	32.58	2.58×10^3	167.3
Depth	250	8146	13	00	165	12	32.58	27	167.2
Depth	75	8138	13	00	165	12	32.58	2.31×10^3	167.4
Depth	30	8139	13	00	165	12	32.58	3.35×10^3	167.5
Depth	50	8140	13	00	165	12	32.58	2.42×10^3	167.6
Depth	90	8141	13	00	165	12	32.58	1.62×10^2	167.7
Depth	100	8142	13	00	165	12	32.58	1.80×10^2	168.1
Depth	125	8143	13	00	165	12	32.58	40	168.2
Depth	150	8144	13	00	165	12	32.58	25	168.4
Depth	200	8145	13	00	165	12	32.58	0	168.6
Depth	300	8147	13	00	165	12	32.58	93	194.0
Depth	350	8148	13	00	165	12	32.58	35	194.2
Depth	400	8149	13	00	165	12	32.58	53	194.3
Depth	450	8150	13	00	165	12	32.58	71	194.5
Depth	500	8151	13	00	165	12	32.58	73	194.6
Depth	70	8152	13	06.4	165	02	58.75	1.64×10^3	194.8
Depth	10	8153	13	06.4	165	02	58.75	1.64×10^3	195.0
Depth	50	8154	13	06.4	165	02	58.75	1.53×10^3	195.1
Depth	3,000	8375	13	08.5	164	59	64.08	55	195.2
Depth	2,500	8376	13	06.4	165	02	58.75	60	195.4
Surface		8363	13	00	165	12	32.58	2.08×10^3	243.7
Surface		8364	13	00	165	12	32.58	1.75×10^3	243.8
Surface		8365	13	04	165	12.5	37.08	2.05×10^3	243.9
Surface		8366	13	04.7	165	12.5	41.83	1.77×10^3	244.0
Surface		8367	13	00	165	12	26.08	2.54×10^3	244.1
Surface		8368	12	06.5	165	39	8.42	93	244.2
Surface		8377	13	06.5	165	02	58.75	1.11×10^3	244.4
Surface		8378	13	06.5	165	02	58.75	1.04×10^3	244.5
Surface		8379	12	19	165	17	19.08	5.12×10^4	244.5
Surface		8380	13	06	165	04.5	53.08	1.78×10^3	244.6
Surface		8388	13	09	165	58.5	68.08	1.01×10^3	262.1
Surface		8389	13	11.5	165	55	72.33	9.90×10^2	262.2
Surface		8390	13	12.5	164	56	80.33	9.38×10^2	262.4
Surface		8391	13	11	165	55	76.08	1.06×10^3	262.6
Surface		8392	13	13	164	52	84.58	9.85×10^2	262.7
Shot Flathead, YAG 40									
Surface		8092	12	29	165	45	18.5	12,332	170.0
Surface		8093	12	29	165	45	18.5	9,286	170.5
Surface		8097	12	45.5	165	01	25.1	6,186	170.3
Surface		8104	12	41	166	05	26.9	3,670	170.2
Surface		8103	12	41	166	05	26.9	7,681	170.3
Surface		8102	12	41	166	05	26.9	4,856	170.4
Surface		8095	12	29	165	45	18.5	7,906	170.4
Surface		8094	12	29	165	45	18.5	7,694	170.6
Surface		8098	12	08	165	28	18.8	19,401	189.4
Surface		8099	12	08	165	28	18.8	24,122	189.4
Sea Background		8088	12	45.5	166	01	6.63	8,087	170.0
Sea Background		8089	12	29.8	165	22.2	6.63	7,266	170.1
Sea Background		8090	12	19	165	20.5	7.65	7,944	172.5
Sea Background		8091	12	19	165	20.5	7.65	1,953	172.5
Shot Flathead, YAG 39									
Surface		8543	12	04	165	26	13.8	12,890	73.5
Surface		8545	12	04	165	26	13.8	8,442	73.6
Surface		8553	12	08	165	28	18.8	7,491	172.6
Surface		8555	12	08	165	28	18.8	3,744	189.3
Surface		8544	12	04	165	26	13.8	9,205	73.5
Surface		8554	12	08	165	28	18.8	3,008	189.2

TABLE B.32 CONTINUED

Type	Number	Location				Collection Time H + hr	Dip counts/2,000 ml	
		North Latitude		East Longitude			Net counts/min at H + hr	
		Deg	Min	Deg	Min			
Sea Background	8539	12	01	165	07	-0.68	125	71.9
Sea Background	8540	12	01	165	07	-0.68	637	72.2
Sea Background	8541	12	05	165	15	2.07	438	72.3
Sea Background	8542	12	05	165	15	2.07	424	72.4
Tank	8548	12	04	165	26	14.1	209,567	73.7
Tank	8550	12	04	165	26	14.1	91,374	73.9
Tank	8549	12	04	165	26	14.1	113,379	73.8
Tank	8558	12	08	165	28	19.2	30,555	189.6
Tank	8559	12	08	165	28	19.2	30,537	189.6
Tank	8560	12	08	165	28	19.2	41,859	189.7
Tank Background	8537	12	01	165	07	-0.93	556	72.5
Tank Background	8538	12	01	165	07	-0.93	572	72.6
Shot Flathead, DE 365								
Surface	8400	13	17	165	05.3	52.3	2,605	214.8
Surface	8399	13	17	165	05.3	52.3	2,169	214.9
Surface	8401	13	47.3	164	21.5	60.1	2,764	215.0
Surface	8394	11	30.5	164	53.8	11.1	1,173	215.1
Surface	8390	12	44.0	165	31.2	34.6	6,145	215.7
Surface	8397	13	10.3	166	09.1	42.6	2,165	215.8
Surface	8398	13	21.2	165	38.9	48.1	1,846	215.9
Surface	8393	11	30.5	164	53.8	11.1	1,328	215.9
Surface	8395	12	30.0	165	14.2	29.9	6,649	216.0
Shot Flathead, DE 534								
Surface	8436	11	36	165	11	16.7	4,891	194.3
Surface	8435	11	36	165	11	16.7	4,972	194.3
Surface	8439	11	51	165	20	35.6	19,491	194.4
Surface	8440	11	53	164	56	38.1	11,651	194.5
Surface	8442	11	45.1	165	03.8	47.8	10,761	194.5
Surface	8443	12	42	163	29	51.1	1,017	194.6
Surface	8441	11	45.1	165	03.8	47.8	10,025	194.7
Surface	8437	11	52	165	23	19.1	22,535	194.8
Surface	8438	11	52	165	19	31.7	15,277	194.9
Shot Flathead, Horizon								
Depth 251	8497	12	29.5	164	34	75.1	5.49×10^2	190.8
Depth 150	9498	12	29.5	164	34	75.1	7.00×10^2	190.9
Depth 501	8496	12	29.5	164	34	75.1	1.67×10^2	191.2
Depth 126	8500	12	29.5	164	34	75.1	1.25×10^3	191.5
Depth 105	8499	12	29.5	164	34	75.1	1.27×10^2	191.6
Depth 351	8495	12	29.5	164	34	75.1	4.76×10^2	191.9
Depth 25	8503	12	09.2	165	31	29.6	3.64×10^2	192.5
Depth 25	8504	12	07.2	164	50.5	53.1	3.48×10^3	193.4
Depth 350	8505	12	09.2	165	31	29.6	3.27×10^2	193.5
Depth 50	8506	12	07.2	164	50.5	53.1	4.05×10^3	193.6
Depth 25	8524	12	22.5	164	34	75.1	6.38×10^2	196.3
Depth 50	8522	12	22.5	164	34	75.1	3.82×10^2	196.5
Depth 501	8520	12	07.2	164	50.5	53.1	1.07×10^2	196.6
Depth 75	8523	12	22.5	164	34	75.1	1.13×10^2	213.5
Depth 351	8519	12	07.2	164	50.5	53.1	2.02×10^2	213.6
Depth 91	8521	12	22.5	164	34	75.1	3.91×10^2	213.7
Depth 75	8514	12	07.2	164	50.5	53.1	1.03×10^3	213.9
Depth 91	8513	12	07.2	164	50.5	53.1	1.02×10^2	214.0
Depth 106	8515	12	07.2	164	50.5	53.1	95	214.1
Depth 126	8516	12	07.2	164	50.5	53.1	1.16×10^2	214.3
Depth 151	8517	12	07.2	164	50.5	53.1	8.38×10^2	214.3
Depth 251	8518	12	07.2	164	50.5	53.1	1.98×10^2	214.6
Depth 150	8501	12	09.2	165	31	29.6	2.56×10^2	217.5
Depth 500	8502	12	09.2	165	31	29.6	2.40×10^2	217.6
Depth 75	8507	12	09.2	165	31	29.6	9.31×10^2	217.7
Depth 50	8509	12	09.2	165	31	29.6	4.80×10^2	239.9
Depth 105	8510	12	09.2	165	31	29.6	8.56×10^2	240.0
Depth 90	8512	12	09.2	165	31	29.6	1.55×10^2	240.2
Depth 25	8511	12	09.2	165	31	29.6	3.80×10^2	240.4
Depth 125	8508	12	09.2	165	31	29.6	1.47×10^2	240.5

TABLE B.32 CONTINUED

Type	Number	Location				Collection Time H + hr	Dip counts/2,000 ml	
		North Latitude		East Longitude			Net counts/min at H + hr	
		Deg	Min	Deg	Min			
Surface	8485	12	29	164	00	70.1	1.92×10^2	190.1
Surface	8486	12	22.5	164	34	98.9	4.12×10^2	190.3
Surface	8487	12	24	164	32	80.1	4.25×10^2	190.5
Surface	8488	12	24	164	32	80.1	4.70×10^2	190.6
Surface	8477	12	10	165	31	29.6	1.29×10^3	192.0
Surface	8478	12	07	164	52.3	50.6	5.65×10^3	192.1
Surface	8481	11	30	165	11.3	17.6	1.16×10^4	192.2
Surface	8480	12	07	164	51	46.1	1.48×10^4	192.2
Surface	8482	12	10.2	165	31	16.6	4.12×10^3	192.4
Surface	8492	12	14	165	27.2	101.6	3.90×10^3	214.7
Surface	8493	12	36.5	165	23	100.6	6.91×10^3	214.9
Surface	8483	12	06	163	52	42.6	9.26×10^2	216.4
Surface	8484	12	07.4	164	48.6	56.8	1.93×10^3	217.4
Surface	8479	12	10	165	31.3	29.6	1.69×10^3	193.7
Shot Navajo, YAG 40								
Surface	8276	12	07	164	57.5	16.9	15,198	94.8
Surface	8277	12	07	164	57.5	16.9	15,615	94.9
Surface	8278	12	07	164	57.5	16.9	15,823	95.0
Sea Background	8272	12	10.5	165	03.5	1.3	2,136	76.5
Sea Background	8273	12	10.5	165	03.5	1.3	2,161	76.6
Sea Background	8274	12	11	165	05	1.8	399	94.7
Shot Navajo, YAG 39								
Surface	8580	11	59.5	165	15.5	18.2	81,925	75.5
Surface	8581	11	59.5	165	15.5	18.2	80,837	75.7
Surface	8582	11	59.5	165	15.5	18.2	79,545	75.8
Surface	8567	11	59	165	19	10.3	109,820	75.9
Surface	8565	11	59	165	19	10.3	111,223	95.5
Surface	8566	11	59	165	19	10.3	141,359	95.5
Surface	8580	11	59.5	165	15.5	18.2	60,389	95.6
Surface	8595	11	56	165	13	35.9	13,329	191.0
Surface	8596	11	56	165	15.5	35.9	14,291	191.5
Surface	8588	11	58	165	15	32.4	18,008	191.6
Surface	8601	12	00	165	15	39.9	12,324	191.7
Surface	8602	12	00	165	15	39.9	12,432	191.9
Surface	8573	11	59.5	165	15.5	17.6	27,877	192.0
Surface	8587	11	58	165	15	32.4	17,509	195.9
Surface	8589	11	58	165	15	32.4	16,594	196.0
Surface	8574	11	59.5	165	15.5	17.6	39,429	196.0
Surface	8575	11	59.5	165	15.5	17.6	24,722	196.1
Surface	8600	12	00	165	15	39.9	11,726	196.2
Surface	8594	11	56	165	15.5	39.5	14,714	190.9
Sea Background	8564	12	10	165	16	0.9	328	95.3
Sea Background	8563	12	10	165	16	0.9	224	95.2
Tank	8569	11	59	165	19	10.6	411,687	76.0
Tank	8570	11	59	165	19	10.6	423,655	76.0
Tank	8571	11	59	165	19	10.6	458,030	76.1
Tank	8583	11	59.5	165	15.5	18.3	448,969	76.2
Tank	8585	11	59.5	165	15.5	18.3	467,724	76.2
Tank	8586	11	59.5	165	15.5	18.3	451,791	76.3
Tank	8579	11	59.5	165	15.5	17.6	142,748	196.4
Tank	8599	11	56	165	15.5	36.0	126,273	192.2
Tank	8591	11	58	165	15	32.5	126,729	196.3
Tank	8592	11	58	165	15	32.5	126,065	196.5
Tank	8604	12	00	165	15	40.0	124,524	196.5
Tank	8593	11	58	165	15	32.5	129,962	196.6
Tank	8598	11	56	165	15.5	36.0	109,514	217.8
Tank	8605	12	00	165	15	40.0	104,539	217.8
Tank	8577	11	59.5	165	15.5	17.6	122,019	217.9
Tank	8578	11	59.5	165	15.5	17.6	116,574	218.0
Tank Background	8561	11	59	165	19	1.0	3,009	35.0
Tank Background	8562			En route		1.0	3,084	95.1

TABLE B.32 CONTINUED

Type	Number	Location				Collection Time	Dip counts/2,000 ml	
		North Latitude		East Longitude			H+hr	Net counts/min at H+hr
		Deg	Min	Deg	Min			
Shot Navajo, DE 365								
Surface	8047	11	38.5	164	53.4	14.0	21,208	170.4
Surface	8051	12	03	163	18.2	36.6	355	170.5
Surface	8048	11	38.5	164	53.4	14.0	22,007	170.5
Surface	8049	11	38	164	43.6	15.3	28,027	170.5
Surface	8242	11	34.5	164	44.1	-34.4	2,545	170.8
Surface	8052	12	44.3	162	40.0	43.0	6,208	172.2
Surface	8053	12	44.3	162	40.0	43.0	5,246	172.3
Surface	8050	11	37.5	164	37.5	18.5	12,765	213.7
Surface	8054	12	23.1	164	41.4	75.0	694	214.0
Surface	8241	11	41	165	11.5	-39.6	20,283	189.8
Shot Navajo, DE 534								
Surface	8235	11	52	165	41	12.5	987	190.7
Surface	8236	11	52	165	41	12.9	693	215.0
Surface	8237	12	09	165	12.2	30.3	5,348	214.2
Surface	8238	11	49.5	164	45.9	34.4	8,177	214.9
Surface	8239	11	57	163	55	43.3	3,376	214.8
Surface	8240	12	36	164	54	56.2	2,019	215.8
Surface	8444	12	36	164	54	56.2	2,001	214.8
Surface	8445	11	38	164	53.2	61.1	14,219	216.4
Surface	8446	11	25	164	26.5	64.9	6,046	190.0
Surface	8447	12	09	164	14	76.4	1,383	190.3
Surface	8448	12	42	163	33.4	85.0	298	190.4
Surface	8451	12	42.5	164	19	80.7	680	191.0
Surface	8452	12	42.5	164	19	80.7	735	190.0
Surface	8453	11	52.8	164	37.6	85.0	1,033	215.8
Surface	8454	12	20	165	20	88.9	1,120	214.9
Surface	8455	12	07	165	27.5	90.5	2,452	215.0
Shot Navajo, Horizon								
Depth 55	8210	12	08.5	164	53.7	79.0	0.09 × 10 ⁴	170.6
Depth 28	8207	12	08.5	164	53.7	79.0	0.145 × 10 ⁴	170.7
Depth 9	8205	12	08.5	164	53.7	79.0	2.49 × 10 ⁴	170.9
Depth 100	8234	11	46.2	165	15.6	90.0	2.49 × 10 ⁴	170.1
Depth 90	8231	11	46.2	165	15.6	90.0	2.56 × 10 ⁴	171.0
Depth 20	8226	11	46.2	165	15.6	90.0	2.58 × 10 ⁴	171.0
Depth 60	8222	11	59.5	165	09	35.4	2.29 × 10 ⁴	191.8
Depth 60	8230	11	46.2	165	15.6	90.0	2.29 × 10 ⁴	215.0
Depth 64	8211	12	08.5	164	53.7	79.0	0	214.3
Depth 74	8212	12	08.5	164	53.7	79.0	1.93 × 10 ⁴	214.3
Depth 75	8223	11	59.5	165	09	35.0	2.09 × 10 ⁴	124.4
Depth 83	8213	12	08.5	164	53.7	79.0	0.018 × 10 ⁴	214.5
Depth 25	8217	11	59.5	165	09	35.0	2.71 × 10 ⁴	214.5
Depth 15	8216	11	59.5	165	09	35.0	2.53 × 10 ⁴	214.7
Depth 80	8232	11	46.2	165	15.6	90.0	1.98 × 10 ⁴	214.7
Depth 5	8215	11	59.5	165	09	35.0	2.58 × 10 ⁴	215.4
Depth 10	8225	11	46.5	165	15.6	90.0	2.33 × 10 ⁴	215.5
Depth 92	8214	12	08.5	164	53.7	79.0	5.13 × 10 ⁴	215.7
Depth 30	8227	11	46.2	165	15.6	90.0	1.96 × 10 ⁴	216.0
Depth 100	8224	11	59.5	165	09	35.0	1.87 × 10 ⁴	216.0
Depth 90	8233	11	46.2	165	15.6	90.0	1.96 × 10 ⁴	216.1
Depth 50	8220	11	59.5	165	09	35.0	2.22 × 10 ⁴	216.2
Depth 55	8221	11	59.5	165	09	35.0	2.18 × 10 ⁴	216.4
Depth 18	8208	12	08.5	164	53.7	79.0	2.02 × 10 ⁴	216.5
Surface	8179	12	00.8	165	29.5	70.3	1.08 × 10 ³	171.1
Surface	8156	11	34.5	165	09	13.4	1.42 × 10 ⁴	189.9
Surface	8165	11	59.5	165	09	37.10	7.16 × 10 ³	190.1
Surface	8191	12	07	165	56.5	80.6	7.00 × 10 ²	190.1
Surface	8155	11	21.3	165	14	7.9	6.00 × 10 ²	190.2
Surface	8190	12	07	164	56.5	80.6	8.11 × 10 ²	190.5
Surface	8163	11	59.5	165	09	35.0	7.72 × 10 ³	190.6
Surface	8164	11	59.5	165	09	35.0	7.26 × 10 ³	190.7
Surface	8160	11	58.3	165	12.3	26.0	1.05 × 10 ⁴	191.5
Surface	8162	11	59.5	165	09	35.0	7.34 × 10 ³	190.9
Surface	8189	12	07	164	56.5	80.7	8.81 × 10 ²	191.7
Surface	8188	11	39	165	03.8	73.2	1.52 × 10 ⁴	192.0

TABLE B.32 CONTINUED

Type	Number	Location				Collection Time	Dip counts/2,000ml	
		North Latitude	East Longitude	North Latitude	East Longitude		H + hr	Net counts/min at H + hr
		Deg	Min	Deg	Min			
Surface	8177	11	46.2	165	15.6	90.0	2.16×10^4	215.0
Surface	8187	11	47	164	46.2	70.2	1.38×10^4	214.1
Surface	8185	11	43.2	165	17.2	55.6	3.06×10^4	215.0
Surface	8186	11	46.5	165	14	52.7	7.88×10^4	216.2
Surface	8175	11	46.2	165	15.6	90.0	2.09×10^4	216.2
Surface	8176	11	46.2	165	15.6	90.0	2.18×10^4	216.3
Surface	8157	11	47.2	165	07.3	15.6	3.41×10^4	218.1
Shot Tewa, YAG 40								
Surface	8284	12	07.4	164	50.6	15.2	1.12×10^6	96.1
Surface	8286	12	07.4	164	50.6	15.2	1.208×10^6	96.2
Surface	8285	12	06.0	165	00.5	18.0	1.239×10^6	96.2
Surface	8285	12	07.4	164	50.6	15.2	1.112×10^6	96.3
Surface	8290	12	06.0	165	00.5	18.0	1.261×10^6	96.4
Surface	8288	12	06.0	165	00.5	18.0	1.188×10^6	96.5
Sea Background	8280	12	15	164	54.0	3.5	3,853	94.8
Sea Background	8281	12	15	164	54.0	3.5	4,002	95.0
Sea Background	8282	12	15	164	54.0	3.5	4,389	95.2
Shot Tewa, YAG 39								
Surface	8325	12	00.5	165	18	11.0	911,781	96.4
Surface	8334	12	04	165	15	20.3	385,747	215.2
Surface	8335	12	04	165	15	20.3	386,665	215.3
Surface	8347	12	12	165	10.5	39.1	367,218	214.1
Surface	8341		At Eniwetok			89.7	393,465	214.3
Surface	8342	12	09	165	07	37.0	404,010	214.3
Surface	8329	12	03	165	16	16.2	450,532	196.8
Surface	8330	12	03	165	16	16.2	432,405	196.7
Surface	8337	12	04	165	13.5	31.4	333,775	213.7
Surface	8338	12	04	165	13.5	31.4	339,126	213.5
Surface	8331	12	03	165	16	16.2	370,653	213.5
Surface	8333	12	04	165	15	20.5	385,065	213.5
Surface	8339	12	04	165	13.5	31.3	322,553	215.0
Surface	8346	12	12	165	10.5	39.1	362,513	214.4
Surface	8343	12	09	165	07	37.0	392,477	215.0
Surface	8284	12	07.4	164	50.6	15.2	590,172	148.0
Surface	8326	12	00.5	165	18	11.0	932,578	96.3
Surface	8327	12	00.5	165	18	11.0	999,568	94.9
Surface	8345	12	12	165	10.5	39.1	371,474	215.0
Sea Background	8322		En route			1.2	440	96.0
Sea Background	8321		En route			1.2	388	95.7
Tank	8349		En route			52.0	1.314×10^7	215.7
Tank	8350		En route			52.0	1.302×10^7	216.0
Tank	8351		En route			52.0	1.325×10^7	215.4
Tank	8410		At Eniwetok			91.7	1.325×10^7	216.1
Tank	8411		At Eniwetok			99.7	1.292×10^7	216.3
Tank	8412		At Eniwetok			99.7	1.314×10^7	216.4
Tank	8413		At Eniwetok			99.7	1.292×10^7	216.5
Tank	8415		At Eniwetok			105.2	1.292×10^7	216.5
Tank	8414		At Eniwetok			105.2	1.325×10^7	216.5
Tank	8416		At Eniwetok			105.2	1.302×10^7	216.6
Tank	8353		At Eniwetok			75.5	1.314×10^7	216.7
Tank	8354		At Eniwetok			75.5	1.314×10^7	216.8
Tank	8355		At Eniwetok			75.5	1.302×10^7	216.8
Tank	8408		At Eniwetok			81.7	1.346×10^7	216.0
Tank	8409		At Eniwetok			81.7	1.314×10^7	216.1
Tank Background	8324		En route			1.6	5,848	95.9
Tank Background	8323		En route			1.6	5,802	96.0
Depth Background	8764		Bikini Lagoon			-110.2	29,081	96.0
Depth Background	8763		Bikini Lagoon			-110.2	28,776	96.0

TABLE B.32 CONTINUED

Type	Number	Location				Collection Time H + hr	Dip counts/2,000 ml	
		North Latitude		East Longitude			Net counts/min at H + hr	
		Deg	Min	Deg	Min			
Shot Tewa, DE 365								
Surface	8616	11	57	164	32.8	42.2	190,788	195.8
Surface	8618	11	24.2	165	24.0	51.4	4,767	195.7
Surface	8615	11	51.4	163	43.6	38.2	24,472	195.7
Surface	8627	13	50.0	162	41.0	104.7	511	194.2
Surface	8628	13	50.0	162	41.0	104.7	585	193.1
Surface	8625	13	35.8	163	30.0	99.0	3,682	193.0
Surface	8624	12	31.2	163	49.5	93.0	5,037	193.0
Surface	8623	13	00.8	164	05	85.3	7,303	192.9
Surface	8612	11	36.0	164	07.2	25.0	78,103	192.8
Surface	8610	11	31.5	165	06.2	14.0	7,302	192.8
Surface	8609	11	31.5	165	06.2	14.0	6,848	192.7
Surface	8614	11	51.4	163	43.6	38.2	25,502	192.6
Surface	8613	11	43.7	165	05.7	33.4	5,577	192.5
Surface	8619	13	08.7	164	51.2	62.7	10,095	196.6
Surface	8621	12	40.5	164	53.9	69.4	142,860	196.3
Surface	8611	11	35.7	164	40.0	18.7	149,040	196.3
Surface	8620	12	40.5	164	53.9	69.4	145,527	195.9
Surface	8622	12	14.2	165	01.5	74.4	333,798	213.8
Surface	8617	12	02.5	165	13.8	45.7	379,187	218.1
Shot Tewa, DE 534								
Surface	8656	13	48.8	164	48.8	41.9	826	195.2
Surface	8654	12	57	166	07	25.3	6,039	195.8
Surface	8655	13	41	165	48	34.7	3,055	195.2
Surface	8652	11	46.5	165	33.7	12.6	1,510	195.0
Surface	8653	12	21	165	41	17.7	481	195.0
Surface	8651	11	46.5	165	33.7	12.6	1,583	195.0
Surface	8662	11	58.2	164	54.5	74.2	27,365	194.9
Surface	8661	11	32	164	00	65.1	62,472	194.8
Surface	8660	12	07	164	29	59.3	47,863	*
Surface	8659	12	32	164	42	54.7	69,024	194.6
Surface	8658	12	49.5	164	42	52.1	24,798	194.7
Surface	8657	13	48.8	164	46.8	41.9	1,459	194.6
Surface	8667	11	40	162	33.3	109.9	1,931	194.5
Surface	8668	12	20	162	43.4	105.6	3,266	194.4
Surface	8665	12	49.9	162	55.5	95.4	1,900	194.3
Surface	8663	11	58.2	164	54.5	75.2	27,828	194.1
Surface	8664	11	41.2	163	10.8	88.1	7,918	193.4
Shot Tewa, Horizon								
Depth 70	8750	11	53.2	165	14	59.2	7.04×10^4	192.4
Depth 20	8734	12	30.5	164	57.1	51.2	1.54×10^4	192.4
Depth 40	8736	12	30.5	164	57.1	51.2	7.84×10^4	192.4
Depth 50	8737	12	30.5	164	57.1	51.2	0.72×10^4	192.3
Depth 60	8738	12	30.5	164	57.1	51.2	0.67×10^4	192.3
Depth 70	8739	12	30.5	164	57.1	51.2	0.54×10^4	192.2
Depth 80	8740	12	30.5	164	57.1	51.2	0.67×10^4	192.1
Depth 60	8749	11	53.2	165	14	59.2	7.54×10^4	192.1
Depth 85	8751	11	53.2	165	14	59.2	6.53×10^4	192.0
Depth 168	8732	12	11	165	10.5	41.2	1.03×10^4	192.0

TABLE B.32 CONTINUED

Type	Number	Location				Collection Time H + hr	Dip counts/2,000 mi	
		North Latitude		East Longitude			Net counts/min at H + hr	
		Deg	Min	Deg	Min			
Depth 82	8730	12	11	165	10.5	41.2	3.21×10^4	192.0
Depth 125	8731	12	11	165	10.5	41.2	0.75×10^4	191.7
Depth 64	8729	12	11	165	10.5	41.2	1.15×10^5	191.7
Depth 10	8733	12	30.5	164	51.1	51.2	1.61×10^5	191.7
Depth 52	8728	12	11	165	10.5	41.2	2.12×10^5	190.8
Depth 38	8727	12	11	165	10.5	41.2	2.00×10^5	190.7
Depth 13	8724	12	11	165	10.5	41.2	1.92×10^5	190.6
Depth 9	8723	12	11	165	10.5	41.2	1.95×10^5	190.6
Depth 22	8725	12	11	165	10.5	41.2	1.92×10^5	190.5
Depth 30	8726	12	11	165	10.5	41.2	1.96×10^5	190.5
Depth 30	8735	12	30.5	164	57.1	51.2	1.53×10^5	190.4
Depth 100	8752	11	53.2	165	14	59.2	4.08×10^4	190.3
Depth 55	8748	11	53.2	165	14	59.2	2.07×10^5	190.3
Depth 50	8747	11	53.2	165	14	59.2	2.07×10^5	190.3
Depth 45	8746	11	53.2	165	14	59.2	1.66×10^5	190.1
Depth 40	8745	11	53.2	165	14	59.2	1.23×10^5	190.0
Depth 25	8744	11	53.2	165	14	59.2	6.15×10^4	190.0
Depth 10	8743	11	53.2	165	14	59.2	3.90×10^4	190.0
Depth 100	8742	12	30.5	164	57.1	51.2	0.50×10^4	190.0
Depth 90	8741	12	30.5	164	57.1	51.2	0.49×10^4	189.9
Surface	8718	12	11	165	10.5	41.2	4.20×10^5	215.1
Surface	8719	12	11	165	10.5	41.2	4.08×10^5	215.1
Surface	8695	12	05	165	16	21.7	3.33×10^5	214.2
Surface	8697	12	11	165	10.5	41.2	4.10×10^5	214.2
Surface	8700	12	30.5	164	51.1	51.9	1.42×10^5	196.5
Surface	8706	11	58.2	164	57	77.7	5.02×10^4	196.4
Surface	8712	11	36	164	07.2	25.0	2.03×10^5	196.2
Surface	8722	12	30.5	164	57.1	51.9	1.35×10^5	196.1
Surface	8721	12	30.5	164	57.1	51.9	1.39×10^5	196.1
Surface	8714	12	05.2	164	36.2	92.2	1.44×10^5	196.0
Surface	8699	12	30.5	164	57.1	51.9	1.48×10^5	195.5
Surface	8693	11	53.6	165	26.2	18.4	6.36×10^4	196.0
Surface	8694	12	05	165	16	21.7	3.38×10^5	189.8
Surface	8720	12	13.2	165	08.7	46.4	4.21×10^5	214.0
Surface	8717	12	11	165	10.5	41.2	4.14×10^5	214.0
Surface	8698	12	06.6	165	12	31.0	3.56×10^5	213.9
Surface	8711	12	10.3	165	11.2	81.2	5.67×10^5	218.1
Surface	8705	12	00	164	52	71.9	4.43×10^4	195.3
Surface	8707	11	53.2	165	15	59.0	3.53×10^4	195.4
Surface	8708	11	53.2	165	15	59.0	3.55×10^4	195.4
Surface	8709	11	52.2	165	15	59.0	3.42×10^4	195.5
Surface	8710	11	53.2	165	15	59.0	3.36×10^4	195.6
Surface	8713	11	59	164	20.5	85.2	4.38×10^4	195.7

* Pending further data reduction.

TABLE B.33 INTEGRATED ACTIVITIES FROM PROBE PROFILE MEASUREMENTS (SIO)

Station Number	H+hr	North Latitude		East Longitude		Fissions/ft ² *
		Deg	Min	Deg	Min	
Shot Tewa, Horizon						
T-1	18.4	11	53.6	165	26.2	$2.76 \pm 0.23 \times 10^{14}$
T-2	21.3	12	05	165	16	$2.01 \pm 0.17 \times 10^{15}$
T-3	26.8	12	06.9	165	13.2	$3.61 \pm 0.30 \times 10^{15}$
T-4	30.0	12	06.6	165	12	$3.47 \pm 0.29 \times 10^{15}$
T-5	40.2	12	11	165	10.5	$2.98 \pm 0.25 \times 10^{15}$
T-5A	41.8	12	13	165	12	$2.11 \pm 0.18 \times 10^{15}$ †
T-6	46.5	12	13.2	165	08.7	$2.90 \pm 0.24 \times 10^{15}$
T-11	78.6	11	58.2	164	57	$7.68 \pm 0.64 \times 10^{14}$
T-12	81.2	12	10.3	165	11.2	$3.89 \pm 0.33 \times 10^{15}$
T-13	85.2	11	45	164	28	$2.05 \pm 0.17 \times 10^{15}$
T-14	94.8	11	59	164	20.5	$5.88 \pm 0.50 \times 10^{14}$
T-15	101.8	12	05.3	164	36.2	$1.66 \pm 0.14 \times 10^{15}$
Mean of Stations						
2 to 6 and 12	-	-	-	-	-	$3.00 \pm 0.77 \times 10^{15}$
Shot Navajo, Horizon						
N-4	18.6	11	57	165	17.5	$7.21 \pm 0.80 \times 10^{13}$
N-4A	20.0	11	58.5	165	13	$5.81 \pm 0.64 \times 10^{13}$
N-5	21.2	11	58.5	165	13	$5.95 \pm 0.66 \times 10^{13}$
N-7	31.0	11	59	165	08	$5.86 \pm 0.65 \times 10^{13}$
N-8	34.3	11	59.5	165	09	$5.07 \pm 0.56 \times 10^{13}$
Mean of Stations						
4 to 8	-	-	-	-	-	$5.98 \pm 1.02 \times 10^{13}$

* Conversion factors ($\frac{\text{dip counts/min}}{\text{app mr/hr}}$): $2.29 \pm 0.24 \times 10^5$ (Tewa)
 $1.51 \pm 0.38 \times 10^5$ (Navajo)

† Nansen bottle sampling profile gave 1.82×10^{15} fissions/ft² for this station.

TABLE B.34 INDIVIDUAL SOLID-PARTICLE DATA, SHOTS ZUNI AND TEWA

Particle		Mean Collection Time ~ H+hr	Particle Diameter microns	Activity	
Type	Number			Net counts/min at H+hr	
Shot Zuni, YAG 40-A-1					
Sphere	331-7	3.84	200	1,200,000	12.0
Sphere	322-17	7.17	240	607,000	12.0
Yellow sphere	327-59	5.58	143	504,000	12.0
Irregular	327-15	5.58	200	432,000	12.0
Irregular	325-64	5.17	240	320,000	12.0
Agglomerated	327-21	5.58	260 × 360	501,000	12.0
Agglomerated	327-66	5.17	180	439,000	12.0
Sphere	331-2	3.84	220	219,000	12.0
Sphere	335-6	4.67	70	129	12.0
Yellow sphere	335-7	4.67	55	32	12.0
Yellow agglomerated	335-10	4.67	120	77,600	12.0
Irregular	335-12	4.67	83	9,830	12.0
Irregular	335-17	4.67	70	244	12.0
Irregular	335-19	4.67	42 × 83	4,940	12.0
Irregular	335-22	4.67	220	152,000	12.0
Sphere	335-26	4.67	83	22,600	12.0
Irregular	335-29	4.67	83 × 143	18,800	12.0
Irregular	324-1	4.67	260	372,000	12.0
Agglomerated	324-4	5.00	120	31,800	12.0
Irregular	324-6	5.00	220	114,000	12.0
Irregular	324-12	5.00	220	235,000	12.0
Yellow irregular	324-16	5.00	220	732,140	12.0
Irregular	324-19	5.00	42	9,030	12.0
Sphere	324-23	5.00	180	359,000	12.0
Irregular	324-24	5.00	180	104,000	12.0
Irregular	324-26	5.00	50	12,200	12.0
Irregular	324-31	5.00	180	123,000	12.0
Agglomerated	324-34	5.00	120	30,900	12.0
Agglomerated	324-36	5.00	110	50,300	12.0
Sphere	324-37	5.00	60	9,180	12.0
Sphere	324-43	5.00	120	86,400	12.0
Irregular	324-48	5.00	240	27,800	12.0
Sphere	324-51	5.00	166	478,000	12.0
Sphere	324-53	5.00	143	417,000	12.0
Sphere	324-54	5.00	170	555,000	12.0
Black sphere	324-55	5.00	42	77	12.0
Yellow sphere	325-56	5.17	83	112,000	12.0
Irregular	325-57	5.17	50	719	12.0
Sphere	325-60	5.17	130	456,000	12.0
Irregular	325-63	5.17	240	320,000	12.0
Agglomerated	325-67	5.17	180 to 260	167,000	12.0
Agglomerated	325-71	5.17	166	123,000	12.0
Agglomerated	325-75	5.17	65	9,530	12.0
Irregular	325-79	5.17	83	17,700	12.0
Irregular	325-83	5.17	380	167,000	12.0
Irregular	325-85	5.17	380	25,900	12.0
Agglomerated	325-90	5.17	70	8,820	12.0
Black irregular	325-93	5.17	100	1,870	12.0
Sphere	325-97	5.17	83	8,960	12.0
Irregular	325-99	5.17	166	28,000	12.0
Irregular	322-9	7.17	260	111,000	12.0
Agglomerated	322-13	7.17	360	549,000	12.0
Irregular	324-57	5.00	200	68,000	12.0
Irregular	352-2	5.17	35	11,400	12.0

TABLE B.34 CONTINUED

Particle		Mean Collection Time ~ H+hr	Particle Diameter microns	Activity	
Type	Number			Net counts/min at H+hr	
Irregular	325-5	5.17	65	1,660	12.0
Sphere	325-7	5.17	166	106,000	12.0
Sphere	325-14	5.17	166	42,100	12.0
Irregular	325-16	5.17	120	72,500	12.0
Agglomerated	325-20	5.17	120	51,300	12.0
Irregular	325-23	5.17	100	22,200	12.0
Black sphere	325-26	5.17	45	317	12.0
Irregular	325-27	5.17	120	22,900	12.0
Irregular	325-31	5.17	285	216,000	12.0
Irregular	325-25	5.17	240	38,000	12.0
Irregular	325-39	5.17	83	17,800	12.0
Irregular	325-41	5.17	120	114,000	12.0
Agglomerated	325-43	5.17	220	223,000	12.0
Sphere	325-51	5.17	100	19,900	12.0
Irregular	325-54	5.17	110	657,000	12.0
Irregular	325-55	5.17	100	26,600	12.0
Irregular	322-18	7.17	240	381,000	12.0
Irregular	327-21	7.17	120	853	12.0
Irregular	327-2	5.58	90	39,600	12.0
Irregular	327-5	5.58	180	178,000	12.0
Sphere	327-8	5.58	120	132,000	12.0
Irregular	327-12	5.58	155	90,000	12.0
Sphere	327-17	5.58	130	51,000	12.0
Irregular	327-20	5.58	240	63,900	12.0
Irregular	327-26	5.58	380	141,000	12.0
Agglomerated	327-28	5.58	380	136,000	12.0
Agglomerated	327-31	5.58	166	126,000	12.0
Sphere	327-33	5.58	60	22,500	12.0
Irregular	327-37	5.58	200	3,930	12.0
Agglomerated	327-43	5.58	166	116,000	12.0
Irregular	327-45	5.58	60 × 120	13,000	12.0
Irregular	327-47	5.58	220	80,300	12.0
Irregular	327-52	5.58	120	12,700	12.0
Sphere	327-55	5.58	83	50,700	12.0
Irregular	327-58	5.58	83	8,200	12.0
Yellow sphere	327-59	5.58	143	504,000	12.0
Sphere	327-63	5.58	200	123,000	12.0
Irregular	322-4	7.17	240	69,000	12.0
Irregular	322-26	7.17	166	3,750	12.0
Yellow irregular	311-11	8.42	180	126,000	12.0
Shot Tewa, YAG 40-A-1					
Irregular white	1839-8	5	165 × 330	3,279	6.42
Irregular white	1842-3	5	231	1,504,907	7.08
Irregular white	1842-5	5	231	521,227	8.25
Flaky white	1832-5	9	198	478,363	15.75
Spherical white	1837-9	8	132	250,651	15.67
Irregular colorless	1832-1	9	99	97,179	15.67
Irregular white	2131-10	10	132	122,480	30.58
Flaky white	2145-15	6	528	2,465,587	33.67
Irregular white	1839-2	5	165	241	5.33
Irregular white	1839-5	5	231 × 330	1,268,782	5.92
Irregular white	1842-3	5	231	1,504,907	7.08
Flaky white	1842-4	5	264	4,326,667	7.17
Irregular white	1842-5	6	231	521,227	8.25
Flaky white	2993-9	6	198	243,712	10.33
Irregular white	2993-11	6	165	679,808	10.67

TABLE B. 34 CONTINUED

Particle Type	Particle Number	Mean Collection Time ~ H + hr	Particle Diameter microns	Activity	
				Net counts/min at H + hr	
Flaky white	1838-9	8	165×495	1,451,104	22.92
Spherical colorless	1838-11	8	33	65,762	14.67
Irregular white	1837-2	8	66	752,185	21.33
Flaky white	1837-5	8	132	240,195	16.17
Irregular white	1837-8	8	132	96,158	20.00
Flaky colorless	1837-11	8	330	1,017,529	21.00
Irregular colorless	1832-3	9	132	661,689	20.17
Flaky white	1832-5	9	198	478,363	15.75
Flaky white	1832-12	9	297	631,311	17.42
Flaky white	1832-15	9	165	634,383	17.58
Flaky colorless	1832-17	9	165	158,659	16.08
Flaky white	1832-21	9	330	505,515	24.75
Flaky white	1855-2	10	99	70,370	41.69
Irregular white	1855-8	10	198	291,910	41.18
Flaky white	1855-10	10	297	787,597	41.33
Spherical white	1842-7	6	115	200,789	8.58
Irregular black	1842-12	6	33	1,762	8.83
Irregular white	2145-10	6	165	460,000	33.50
Irregular white	2145-13	6	99	248,000	33.65
Irregular white	2144-3	6	198	129,860	37.58
Irregular white	2144-7	7	231	274,540	34.06
Irregular white	2144-10	7	132	105,263	37.33
Irregular white	1836-4	13	198	181,295	37.50
Flaky white	1836-8	13	165	292,330	34.58
Spherical white	1841-2	13	132	51,420	36.91
Irregular white	1849-1	15	165	112,033	38.75
Spherical colorless	1840-4	15	396	35,503	37.92
Irregular white	1840-6	15	99	121,820	37.92
Flaky white	1838-1	8	396	2,303,519	21.17
Irregular white	1838-7	8	198	320,153	19.83
Colorless	1855-18	10	198	172	25.33
Flaky white	1855-20	10	66	11,200	41.54
Colorless	1855-29	10	297	122	27.08
Flaky white	1843-2	11	66	82,349	27.33
Spherical white	1843-4	11	132	139,630	40.56
Flaky white	1843-10	11	99	21,440	40.01
Irregular white	1843-13	11	132	101,559	27.67
Flaky white	1843-16	11	165	185,505	40.17
Irregular white	1843-17	11	99	14,650	41.13
Irregular white	1852-2	11	198	47,245	41.00
Flaky white	1852-5	11	132	63,790	39.92
Irregular white	1852-11	11	132	163,917	41.58
Flaky white	1852-12	11	66	691	28.17
Irregular white	1852-14	11	33	5,996	41.17
Irregular white	2125-3	7	132	183,841	40.00
Flaky white	2125-9	7	330	376,736	39.50
Irregular white	2125-11	7	99	31,819	37.75
Flaky white	2125-13	7	33	33,050	38.66
Irregular white	2125-16	7	66	25,615	28.58
Irregular white	2129-4	8	165	45,217	39.83

TABLE B. 34 CONTINUED

Particle		Mean Collection Time ~ H+hr	Particle Diameter microns	Activity	
Type	Number			Net counts/min at H+hr	
Flaky colorless	2129-6	8	99	49,295	28.50
Spherical white	2129-9	8	99	125,583	28.67
Flaky white	2129-11	8	198	296,737	39.67
Irregular white	2129-17	10	66	13,090	31.83
Irregular white	2131-1	10	264	596,410	39.14
Irregular white	2131-3	10	132	242,473	28.92
Flaky white	2131-7	10	330	1,366,339	29.10
Flaky white	2131-9	10	198	383,425	29.83
Spherical white	2131-5	10	132	181,177	34.25
Irregular white	2131-8	10	99	169,257	29.08
Irregular white	2133-1	10	132	125,271	31.08
Irregular white	2133-4	10	165	253,241	34.08
Irregular white	2133-6	10	132	210,497	30.00
Irregular white	2133-11	10	165	189,999	29.50
Flaky white	2136-4	12	66	21,679	29.58
Irregular white	2136-7	12	165	409,519	29.75
Irregular white	2136-10	12	132	272,559	29.67
Irregular white	2136-14	12	132	171,285	32.67
Irregular white	2136-18	12	165	190,020	31.78
Irregular white	2139-2	12	165	228,567	32.17
Irregular white	2139-4	12	132	214,080	32.35
Spherical black	2138-2	14	198	0	32.67
Flaky white	2142-3	6	198	755,093	32.83
Flaky white	2142-7	6	165	346,200	37.18
Irregular white	2142-11	6	132	278,823	33.33
Irregular white	2142-15	6	165	203,303	33.25
White	2145-3	6	330	680,070	33.17
Irregular white	2145-7	6	165	562,400	33.41
Irregular white	2132-1	9	198	4,538	9.42
Flaky white	2132-2	9	132	1,232,123	9.58
Flaky white	2137-1	11	198	902,179	13.75
Flaky colorless	2137-4	11	165	1,024,980	12.08
Flaky white	2137-6	11	363	1,017,891	22.83
Irregular white	2137-10	11	198	644,789	23.58
Spherical white	1856-2	6	144	171,555	23.17
Flaky white	1856-3	6	144	130,923	24.33
Irregular colorless	1856-7	6	144	72	21.92
Flaky white	1834-3	7	165	461,317	24.00
Irregular white	1834-6	7	132	21,396	24.42
Irregular white	1834-10	7	99	63,890	14.25
Spherical white	1844-3	7	99	243,385	21.50
Irregular white	1844-4	7	264	996,939	22.08
Spherical white	1844-10	7	165	97,524	22.25

TABLE B.35 INDIVIDUAL SLURRY-PARTICLE DATA, SHOTS FLATHEAD AND NAVAJO

Particle Number	Mean Collection Time	Particle Diameter microns	Chloride Content grams	Activity	
	~ H+hr			Net counts/min at H+hr	
Shot Flathead, YAG 40-A-1					
3812-3*	9.8	—		1.85×10^6	13.2
3812-6	9.8	—		435,200	14.0
Shot Flathead, YAG 40-B-7					
3759-1	9.0	171	1.1×10^{-6}	1.1×10^6	12.0
3758-2	9.5	164	2.10^{-6}	890,000	12.0
3757-1	10.0	126	8.5×10^{-7}	577,500	12.0
3756-3	10.5	25	1.6×10^{-9}	2,200	12.0
3756-1	10.5	—	5.3×10^{-7}	279,000	12.0
3754-2	11.5	123	7.5×10^{-7}	2.3×10^6	12.0
3752-1	12.5	77	1.0×10^{-7}	1.7×10^6	12.0
3745-1	16.0	108	3.4×10^{-4}	1.1×10^6	12.0
3741-1	18.0	—	2.7×10^{-7}	1.4×10^6	12.0
Shot Flathead, YAG 39-C-33					
2959-1	7.25	134	1.1×10^{-6}	1.25×10^6	12.0
2961-1	8.25	160	1.5×10^{-6}	623,000	12.0
3752-1	12.5	—	1.0×10^{-7}	1.7×10^6	12.0
2979-1	17.25	72	1.5×10^{-7}	527,000	12.0
Shot Flathead, LST 611-D-37					
3538-1	7.5	136	5.9×10^{-7}	971,000	12
3537-1	7.58	107	3.8×10^{-7}	942,000	12
3536-2	7.75	124	5.5×10^{-7}	488,400	12
3535-2	8.00	101	4×10^{-7}	1.11×10^6	12
3534-2	8.12	108	3.3×10^{-7}	1.23×10^6	12
3533-3	8.25	111	2.8×10^{-7}	1.14×10^6	12
3532-5	8.5	109	3.0×10^{-7}	336,000	12
3531-6	8.6	103	2.2×10^{-7}	977,000	12
3531-3	8.6	104	2.2×10^{-7}	1.12×10^6	12
3530-12	8.8	119	2.7×10^{-7}	867,000	12
3530-7	8.8	122	4.5×10^{-7}	982,000	12
3530-4	8.8	125	3.9×10^{-7}	944,000	12
3530-1	8.8	99	3.2×10^{-7}	1.04×10^6	12
3529-6	9.00	114	4.4×10^{-7}	313,000	12
3529-1	9.00	98	3.2×10^{-7}	1.0×10^6	12
3525-1	9.6	107	4.7×10^{-7}	970,000	12
3529-3	9.00	99	2.6×10^{-7}	945,000	12
3529-2	9.00	102	3.7×10^{-7}	713,000	12
3528-2	9.1	98	2.2×10^{-7}	578,000	12
3528-1	9.1	119	5.8×10^{-7}	1.2×10^6	12
Shot Flathead, YFNB 29-H-78					
3069-1	1.08	67	1.5×10^{-7}	58,000	12.0
3069-2	1.08	—	2.3×10^{-4}	39×10^6	12.0
3070-1	1.58	—	7.3×10^{-6}	24×10^6	12.0
3070-2	1.58	—	5×10^{-7}	86,000	12.0
3070-3	1.58	—	3.6×10^{-8}	5,215	12.0
3070-5	1.58	55	4.5×10^{-8}	15,700	12.0
3070-6	1.58	66	2.6×10^{-8}	16,500	12.0
3070-7	1.58	—	8.2×10^{-9}	4,700	12.0
3070-9	1.58	—	1.8×10^{-7}	60,500	12.0

TABLE B.35 CONTINUED

Particle Number	Mean Collection Time	Particle Diameter microns	Chloride Content grams	Activity	
	~ H+hr			Net counts/min at H+hr	
Shot Navajo, YAG 40-A-1					
1869-5	9	165		286,737	10.6
1872-2	9	99		82,293	14.2
1874-1	14	132		129,821	14.7
1876-4	16	—		32,397	16.9
1869-2†	9	149		369,291	10.0
1867-1	7	—		86,560	7.68
1867-2	7	—		786,051	7.75
1867-5	7	165		562,080	8.16
1869-1†	9	149		242,152	9.84
1869-9	9	198		599,190	12.4
1869-9†	9	198		599,190	12.4
Shot Navajo, YAG 40-B-7					
3303-1	8	161	2.5×10^{-6}	25,059	152
3303-2	8	126	1.1×10^{-6}	17,891	152
3303-3	8	166	2.3×10^{-6}	4,410	152
3303-4	8	128	1.1×10^{-6}	7,794	152
3306-1	9	130	9.6×10^{-7}	18,643	147
3306-2	9	112	6.8×10^{-7}	2,992	147
3306-3	9	—	6.8×10^{-7}	6,052	148
3306-4	9	121	6.8×10^{-7}	8,838	148
3306-5	9	134	1.1×10^{-6}	9,682	148
3306-6	9	121	6.8×10^{-7}	11,460	148
3306-7	9	29	3.5×10^{-8}	4,263	148
3308-1	10	143	1.6×10^{-6}	33,082	148
3308-2	10	—	1.6×10^{-6}	22,098	148
3308-3	10	139	6.8×10^{-7}	32,466	148
3308-4	10	126	1.1×10^{-6}	11,696	149
3308-5	10	112	6.8×10^{-7}	9,076	149
3308-6	10	107	5.8×10^{-7}	11,084	149
3308-7	10	112	5.8×10^{-7}	5,562	149
3308-8	10	100	3.8×10^{-7}	2,720	149
3308-9	10	97	3.8×10^{-7}	938	149
3308-10	10	109	5.8×10^{-7}	10,192	149
3308-11	10	111	3.8×10^{-7}	6,068	149
Shot Navajo, YFNB 13-E-57					
3489-3	1.4	265	9.4×10^{-6}	560,000	12
3489-5	1.4	309	1.3×10^{-6}	299,000	12
3490-1	4.9	234	4.4×10^{-6}	199,000	12
3490-5	1.9	326	1.5×10^{-6}	362,000	12
3491-1	2.4	279	6.5×10^{-6}	780,000	12
3491-4	2.4	286	5.5×10^{-6}	151,000	12
3491-6	2.4	230	3.6×10^{-6}	131,000	12
3491-7	2.4	330	1.4×10^{-6}	281,000	12

* Insoluble solids scraped from reagent-film reaction area 3812-6; gamma-energy spectra for both are given in Figures B.15 and B.16.

† Dried slurry.

TABLE B.36 HIGH VOLUME FILTER SAMPLE ACTIVITIES

Shot	Station	Sampling Head Number	Exposure Interval		Ionization Chamber *	
			From H+hr	To H+hr	Activity at H+hr ×10 ¹¹ ma	
Zuni	YAG 39	C-25	12.2	31.1	389	458
	YAG 40	B-8	7.8	16.3	1,543	458
		B-9	3.4	4.8	4,440	458
		B-10	4.8	5.3	10,270	458
		B-11	5.3	5.8	10,380	458
		B-12	5.8	6.3	9,540	458
		B-13	6.3	6.8	2,800	458
		B-14	6.8	7.3	3,040	458
		B-15	7.3	7.8	173	458
Flathead	YAG 39	C-25	4.4	23.7	108 †	340
	YAG 40	B-8	6.1	26.4	140	340
	LST 611	D-42	7.0	7.6	3	340
		D-43	7.6	8.2	58	340
		D-44	8.2	10.9	14	340
		D-45	10.9	12.2	3	340
		D-46	12.2	14.1	5	340
		D-47	14.1	15.6	3	340
		D-48	15.6	18.6	5	340
D-49	18.6	25.6	5	340		
Navajo	YAG 39	C-25	2.1	15.9	609	244
	YAG 40	B-8	1.2	19.1	386	244
	LST 611	D-42	3.2	15.4	76	244
Tewa	YAG 39	C-25	2.0	2.7	320	412
		C-26	2.7	3.2	1,260	412
		C-27	3.2	3.7	3,230	412
		C-28	3.7	4.2	8,980	412
		C-29	4.2	4.7	14,890	412
		C-30	4.7	5.2	6,890	412
		C-31	5.2	5.7	5,240	412
		C-32	5.7	8.4	6,310	412
	YAG 40	B-8	4.3	5.6	3,690	412
		B-9	5.6	6.2	4,750	412
		B-10	6.2	6.7	3,530	412
		B-11	6.7	7.2	2,950	412
		B-12	7.2	7.7	3,280	412
		B-13	7.7	8.2	1,930	412
		B-14	8.2	8.7	2,920	412
	B-15	8.7	18.4	10,590	412	
	LST 611	D-42	7.3	20.5	7,280	412

* Response to 100 µg of Ra = 700×10^{-8} ma.

† DMT spilled on recovery.

TABLE B.37 OBSERVED WIND VELOCITIES ABOVE THE STANDARD PLATFORMS

Relative wind direction is measured clockwise from the bow of all vessels, and indicates the direction from which the wind is blowing. No recording anemometers were installed on YFNB 13-E and YFNB 29-H; the LST 611 instrument malfunctioned.

Time H+hr		Relative Wind Velocity		Time H+hr		Relative Wind Velocity	
From	To	Direction degrees	Speed knots	From	To	Direction degrees	Speed knots
YAG 40 ZU				YAG 39 ZU			
3.35	3.55	125	11	12.7	13.0	10	19
3.55	3.85	130	12	13.0	14.0	0	18
3.85	4.20	130	11	14.0	15.0	0	17
4.20	4.55	130	10	15.0	16.0	355	18
4.55	4.85	130	13	16.0	17.0	340	17
4.85	5.20	135	10	17.0	18.0	335	18
5.20	5.55	135	11	18.0	19.0	340	17
5.55	5.85	135	10	19.0	20.0	350	16
5.85	6.15	130	14	20.0	21.0	0	16
6.15	6.25	130 to 350*	17	21.0	22.0	350	17
6.25	6.55	350	19	22.0	23.0	0	18
6.55	6.85	355	21	23.0	24.0	355	18
				24.0	25.0	355	18
				25.0	26.0	5	19
				26.0	27.0	25	18
				27.0	28.0	30	17
				28.0	29.0	25	18
				29.0	30.0	15	15
YAG 40 FL				YAG 39 FL			
7.30	7.55	255	13	4.35	5.65	5	17
7.55	7.65	255 to 325*	18	5.65	5.80	5 to 85*	16
7.65	9.00	325	15	5.80	6.70	85	18
9.00	10.00	340	15	6.70	6.80	85 to 295 †	16
10.00	11.00	340	15	6.80	8.30	295	15
11.00	12.00	335	15	8.30	8.45	295 to 80*	16
12.00	13.00	335	17	8.45	10.30	80	15
13.00	14.00	345	17	10.30	10.60	80 to 290 †	13
14.00	15.00	355	17	10.60	12.25	290	15
15.00	16.00	355	17	12.25	12.60	290 to 75*	14
16.00	17.00	15	15	12.60	13.30	75	17
17.00	18.00	0	16	13.30	13.35	75 to 15*	14
				13.35	15.25	15	15
YAG 40 NA				YAG 39 NA			
6.05	6.60	350	18	2.20	2.35	265	16
6.60	7.00	350 to 235 †	18	2.35	2.50	265 to 25*	18
7.00	7.05	235	13	2.50	2.60	25	18
7.05	7.50	235 to 135*	18	2.60	2.70	25 to 90*	18
7.50	8.35	235 to 135*	11	2.70	2.80	90	18
8.35	9.20	135 to 25 †, ‡	16	2.80	2.90	90 to 10 †	16
9.20	9.30	25	18	2.90	3.10	10	16
9.30	9.50	25 to 275*	14	3.10	3.30	10 to 295 †	17
9.50	9.70	275	15	3.30	4.10	295	17
9.70	10.00	275 to 25 †	14	4.10	4.30	295 to 85*	18
10.00	10.30	25	15	4.30	5.00	85	18
10.30	10.40	25 to 315*	14	5.00	5.20	85 to 305 †	18
10.40	10.45	315	16	5.20	6.10	305	17
10.45	10.90	315 to 325 †	12	6.10	6.30	305 to 85*	17
10.90	11.10	325	16	6.30	7.00	85	17
11.10	11.25	375 to 60*	15				
11.25	11.60	60	15				
11.60	11.65	60 to 45*	12				
11.65	11.90	45	14				
11.90	12.40	45 to 90 †	12				
12.40	12.55	90	11				
12.55	12.90	90 to 85*	13				

TABLE B.37 CONTINUED

Time H + hr		Relative Wind Velocity Direction	Speed	Time H + hr		Relative Wind Velocity Direction	Speed
From	To	degrees	knots	From	To	degrees	knots
<u>YAG 40 NA</u>							
12.90	12.95	85	12				
12.95	13.40	85 to 70 †	12				
13.40	13.45	70	13				
13.45	13.70	70 to 25 *	10				
13.70	13.75	25	14				
13.75	14.10	25 to 15 *, †	12				
14.10	14.20	15	15				
14.20	14.60	15 to 325 †	12				
14.60	14.65	325	15				
14.65	14.90	325 to 275 *	12				
14.90	14.95	275	13				
14.95	15.00	275 to 335 *	14				
15.00	15.05	335	15				
15.05	15.10	335 to 295 †	16				
15.10	15.25	295	16				
15.25	15.30	295 to 275 †	16				
15.30	16.00	275	16				
16.00	16.30	275 to 70 †	15				
16.30	18.00	70	15				
<u>YAG 40 TE</u>				<u>YAG 39 TE</u>			
4.35	4.65	255	11	2.20	4.80	355	14
4.65	4.70	255 to 230 †	12	4.80	5.00	355 to 100 *	14
4.70	4.90	230	12				
4.90	5.05	230 to 355 *	12				
5.05	7.30	355	15				
7.30	7.35	355 to 360 †	15				
7.35	7.40	360 to 305 †	15				
7.40	8.25	345 ± 40 ‡	15				
8.25	9.30	305 to 355 *	15				
8.30	8.55	355 to 260 †, ‡	14				
8.55	9.15	260	13				
9.15	9.50	360 to 300	14				
9.50	9.55	300	14				
9.55	10.00	300 to 330 *, †	14				
<u>How F</u>							
Shot	Time H + hr		True Wind Velocity				
	From	To	Direction degrees	Speed knots			
Zuni	0	Cessation	77	17			
Flathead	0	Cessation	54	17			
Navajo	0	Cessation	79	12			
Tewa	0	Cessation	92	3.5			
<u>YFNB 29-G</u>							
Shot	Time H + hr		Relative Wind Velocity				
	From	To	Direction degrees	Period minutes	Speed knots		
Zuni	0	Cessation	348 ± 53	10	20		
Flathead	0	Cessation	10 ± 75	10	16		
Navajo	0	Cessation	5 ± 50	10	18		
Tewa	0	Cessation	22 ± 43	11	15		

* Clockwise direction.
 † Counterclockwise direction.
 ‡ Following 360 degrees, rotation in indicated direction.
 § Oscillating relative wind, 12-minute period.

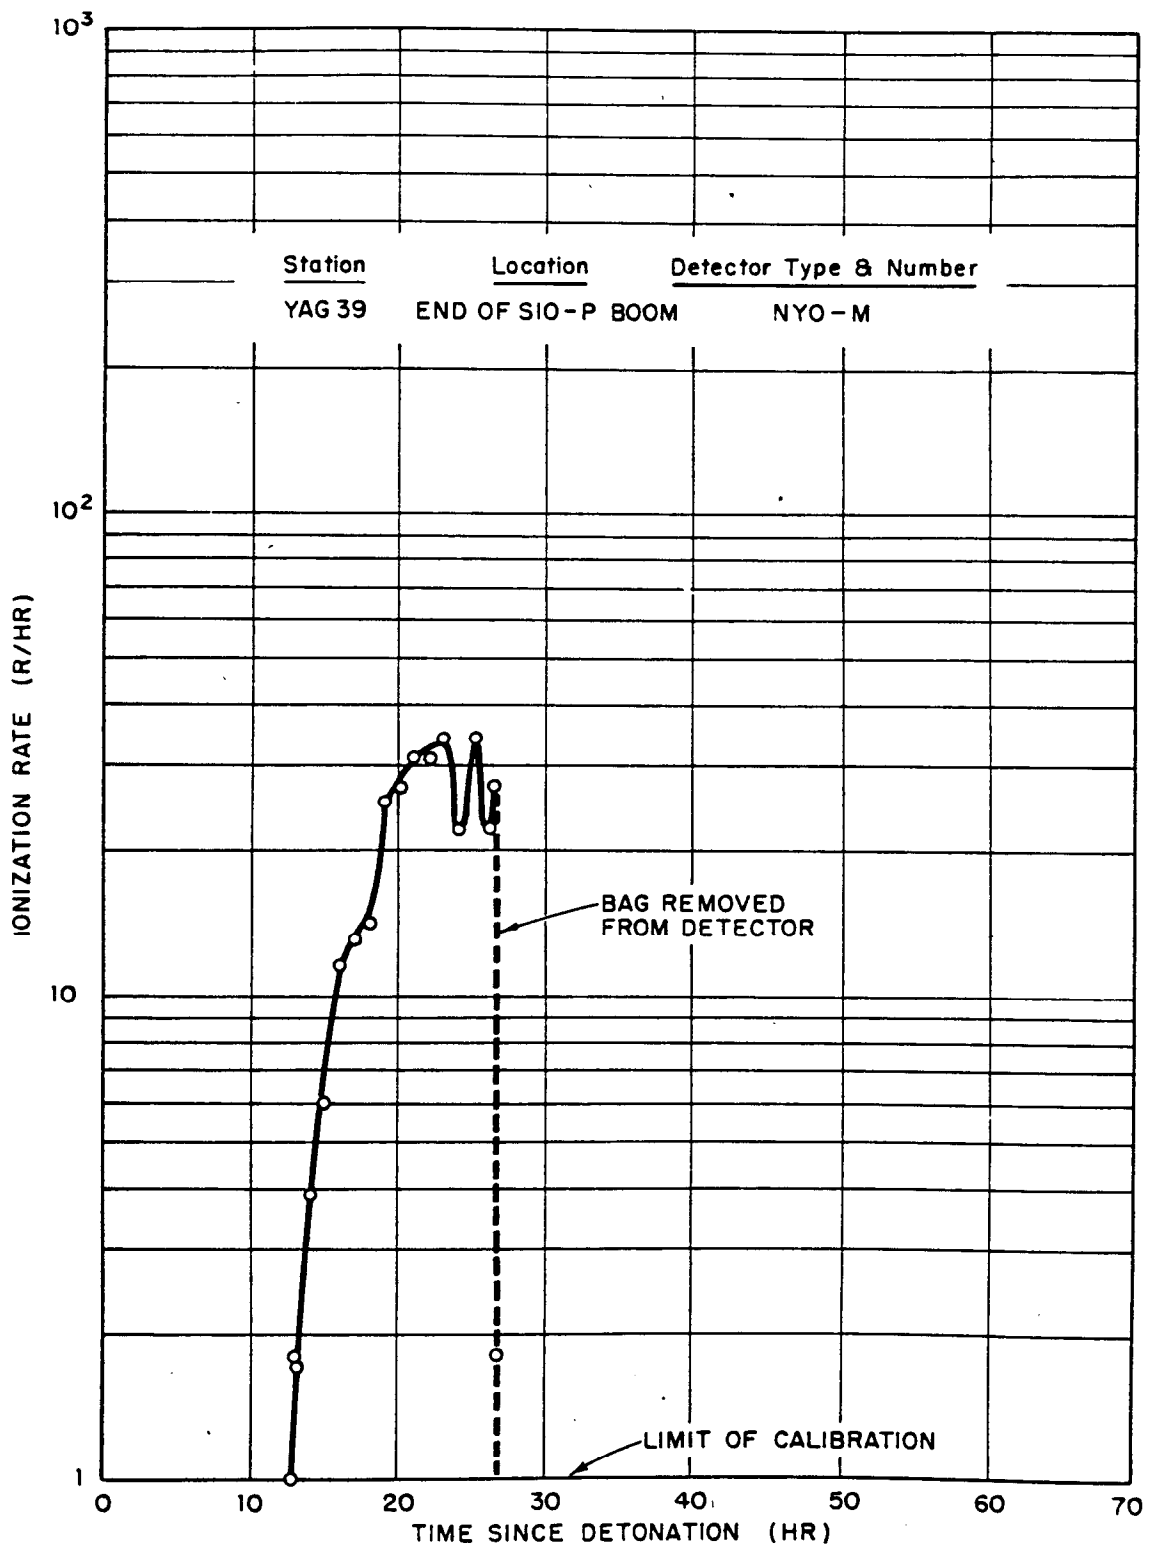


Figure B.8 Surface-monitoring-device record, YAG 39, Shot Zuni.

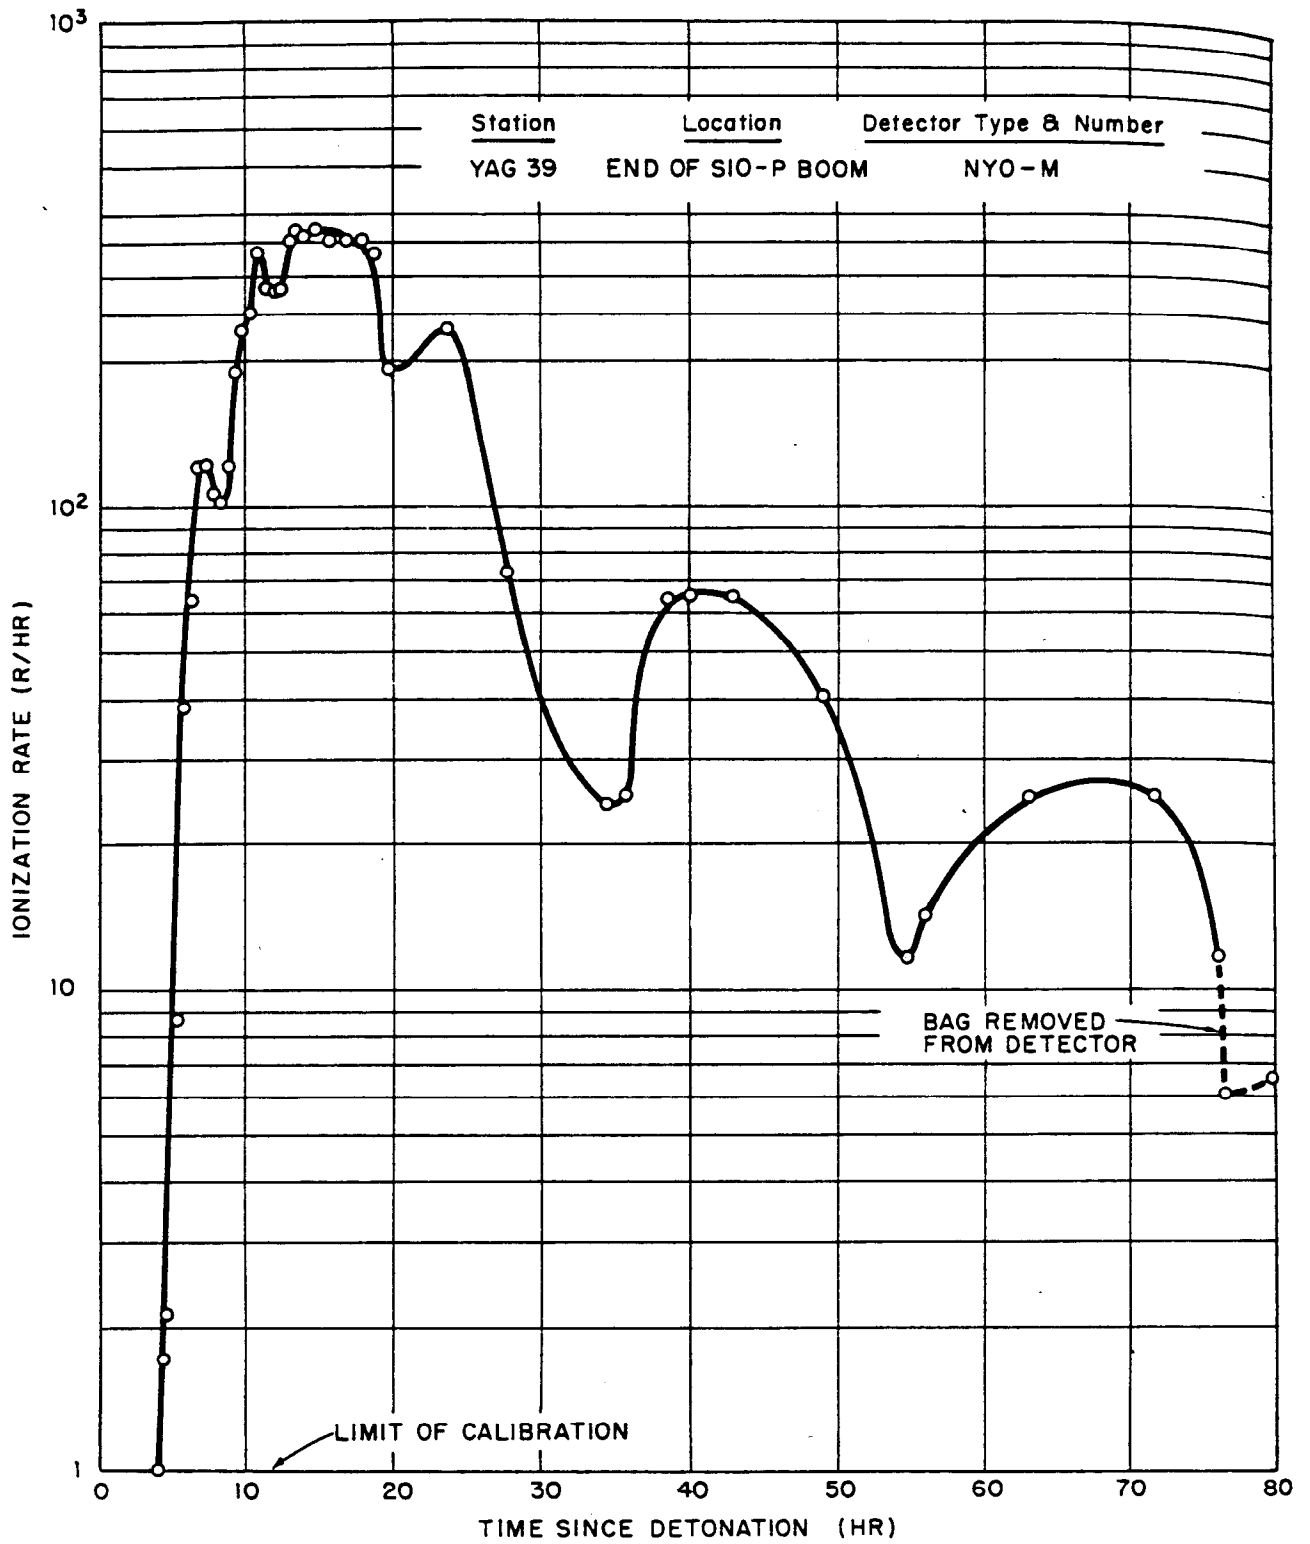


Figure B.9 Surface-monitoring-device record, YAG 39, Shot Flathead.

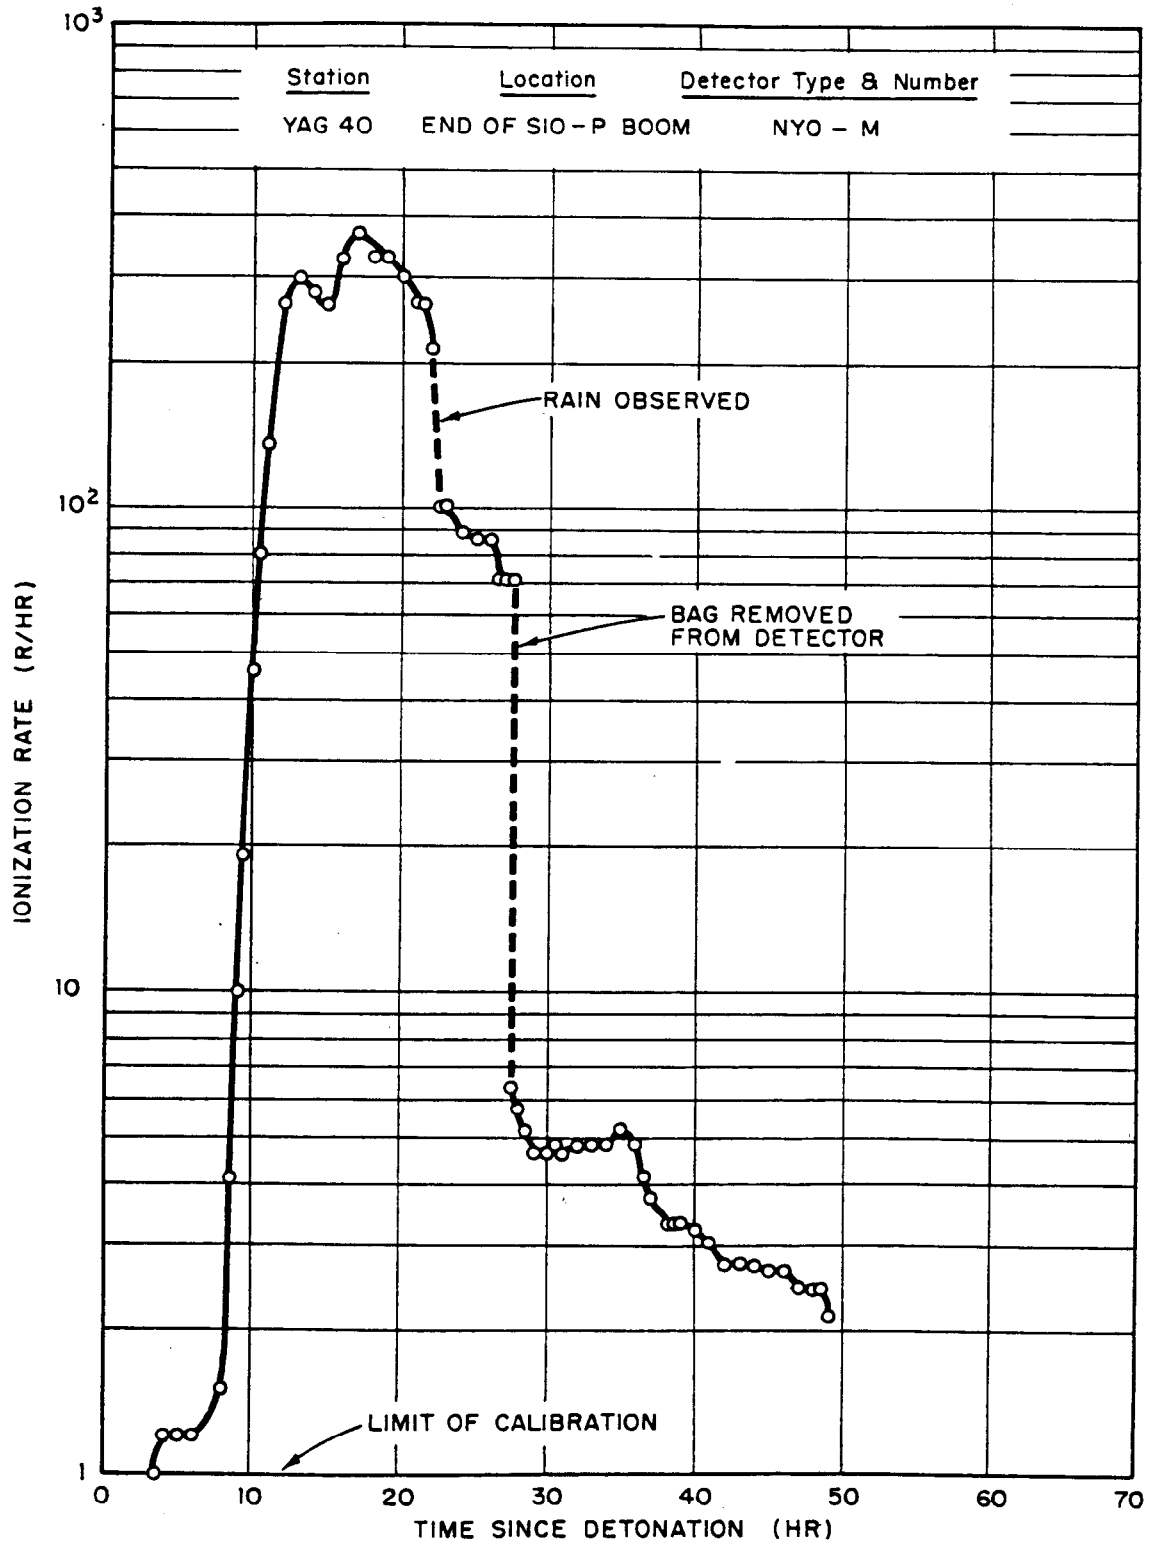


Figure B.10 Surface-monitoring-device record, YAG 40, Shot Flathead.

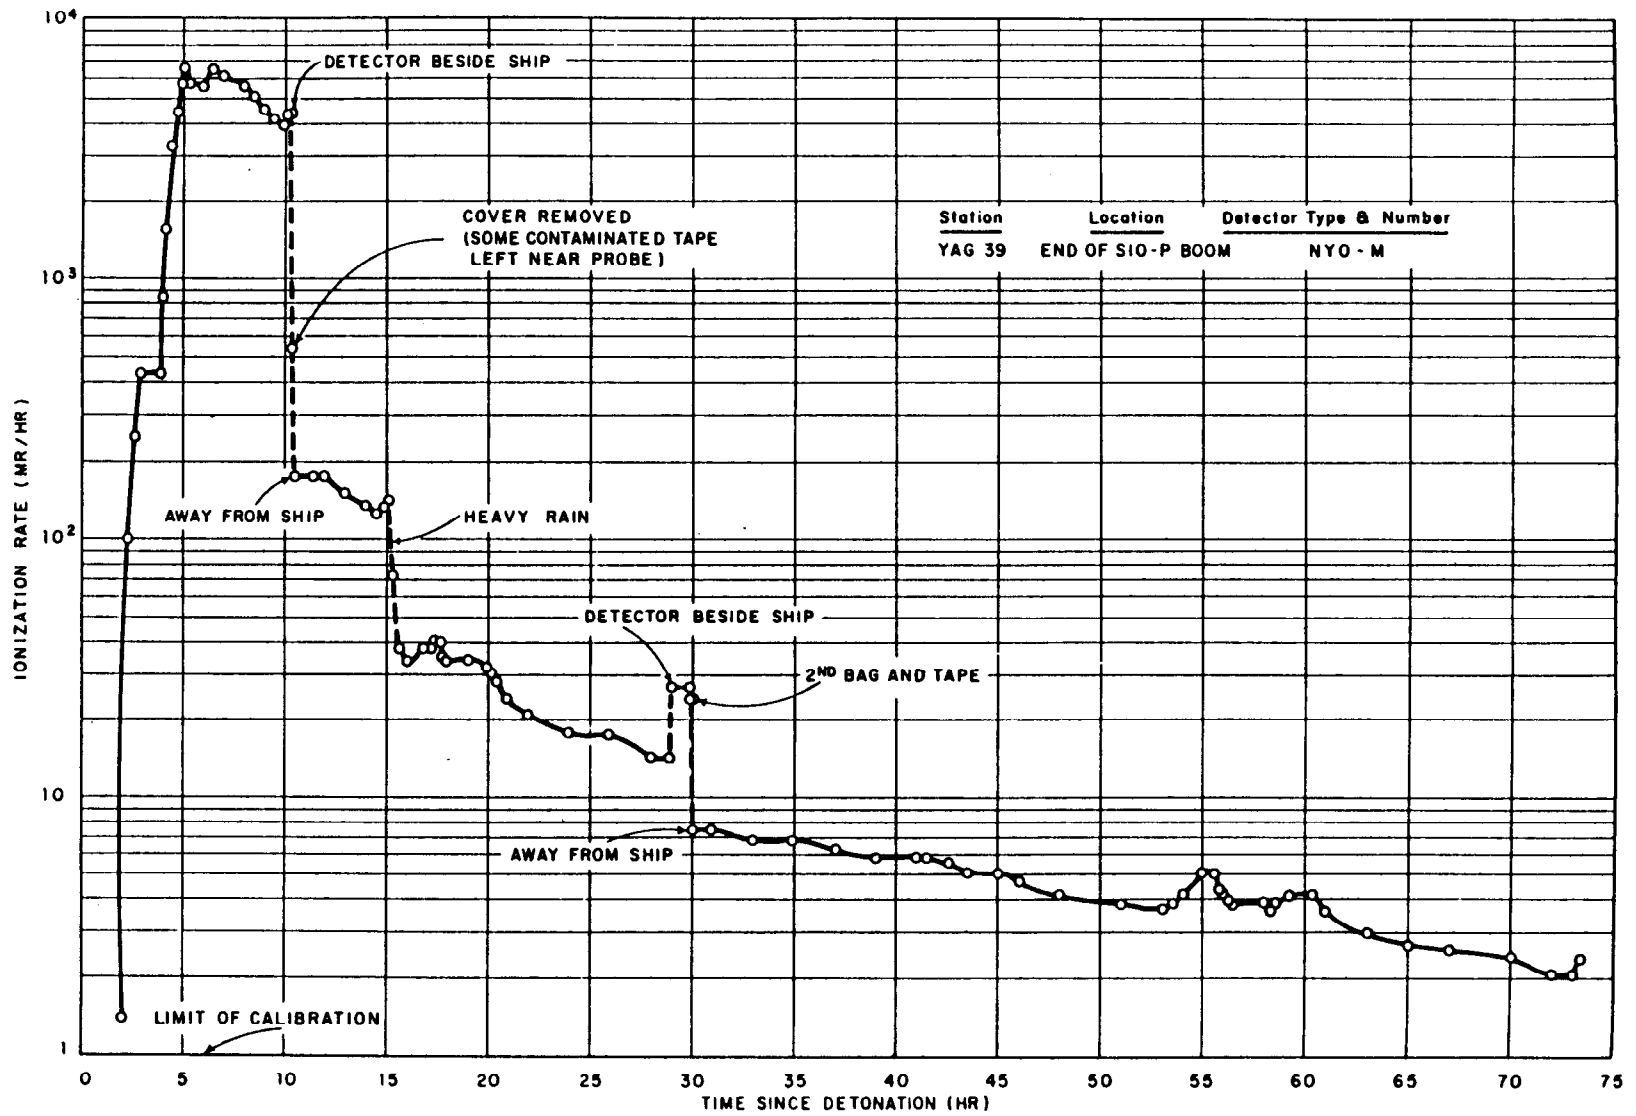


Figure B.11 Surface-monitoring-device record, YAG 39, Shot Navajo.

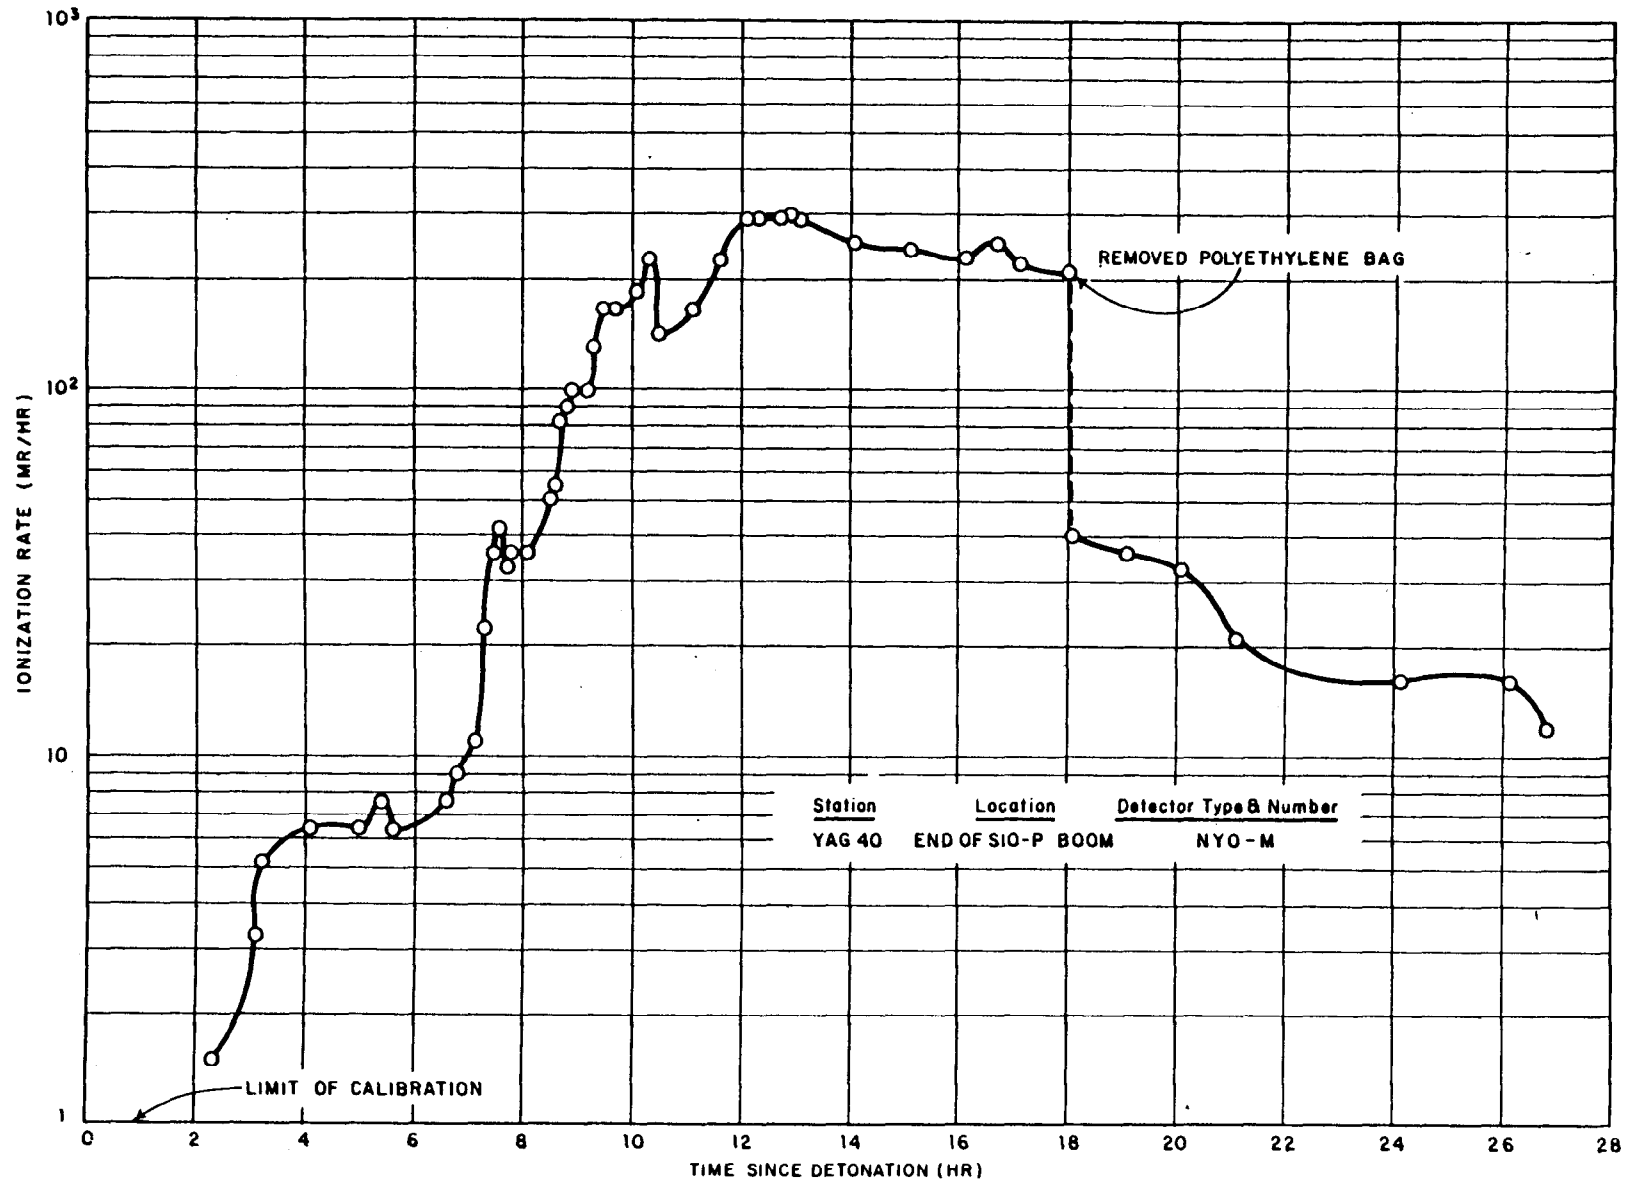


Figure B.12 Surface-monitoring-device record, YAG 40, Shot Navajo.

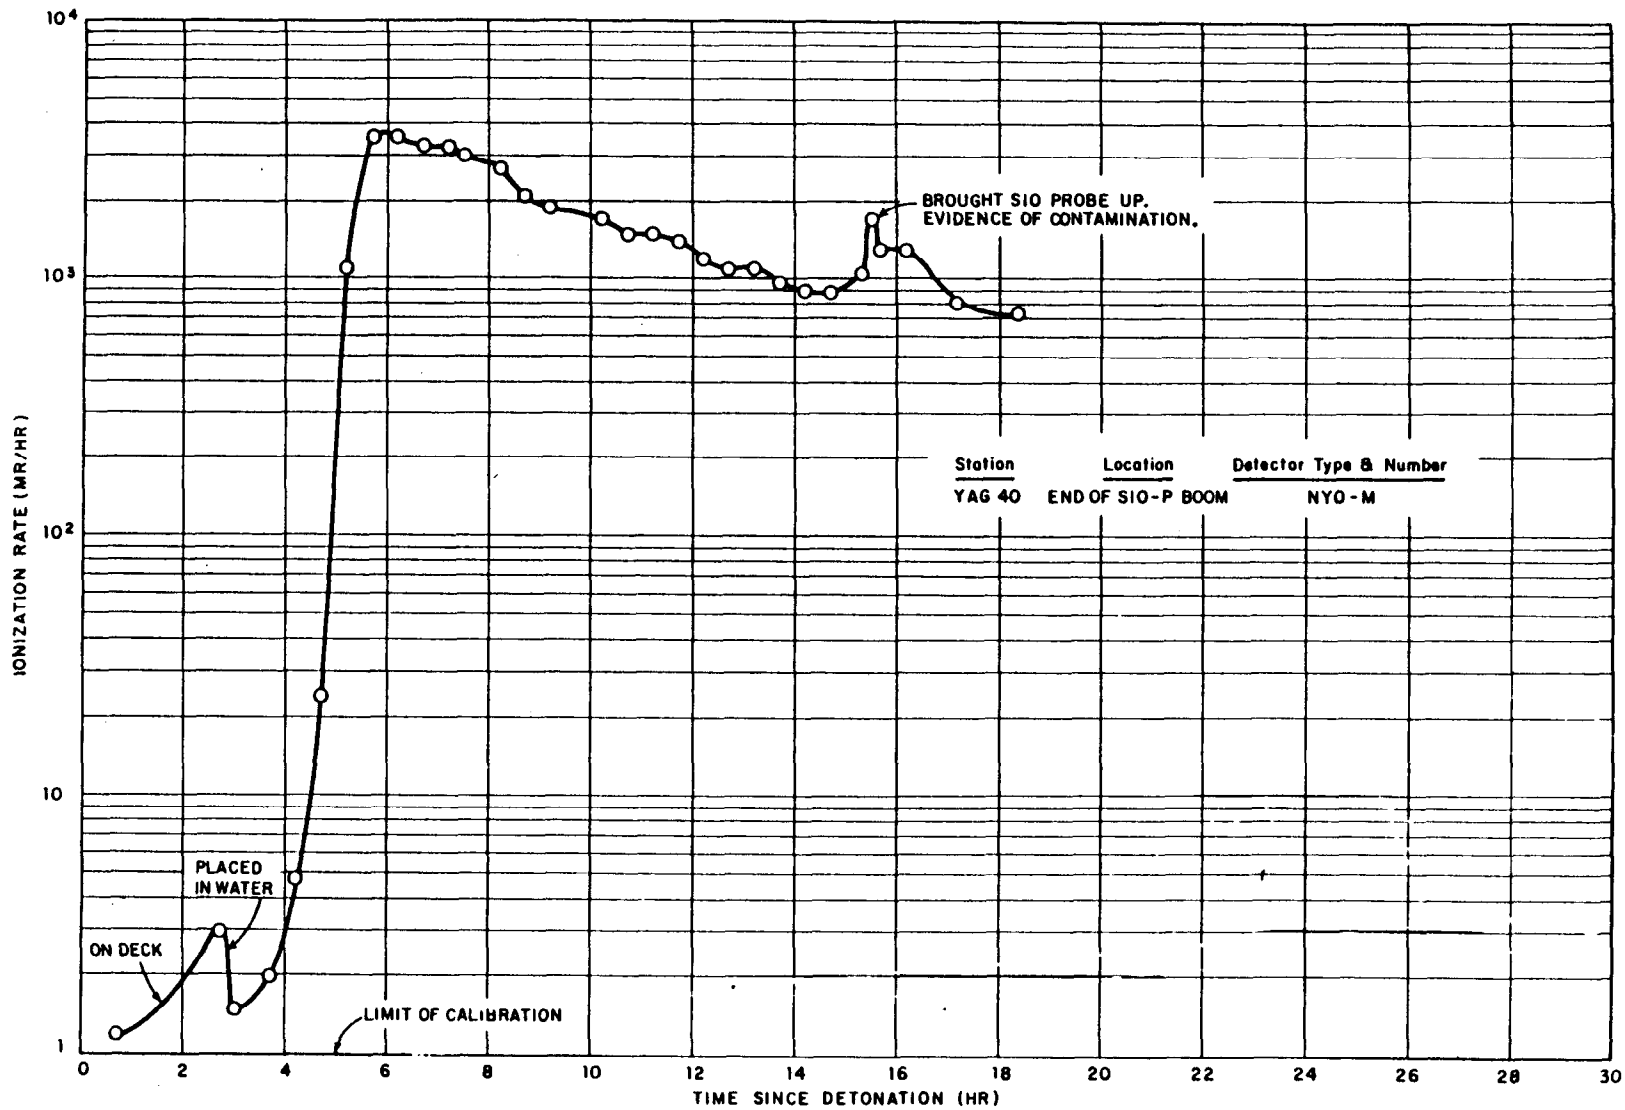


Figure B.13 Surface-monitoring-device record, YAG 40, Shot Tewa.

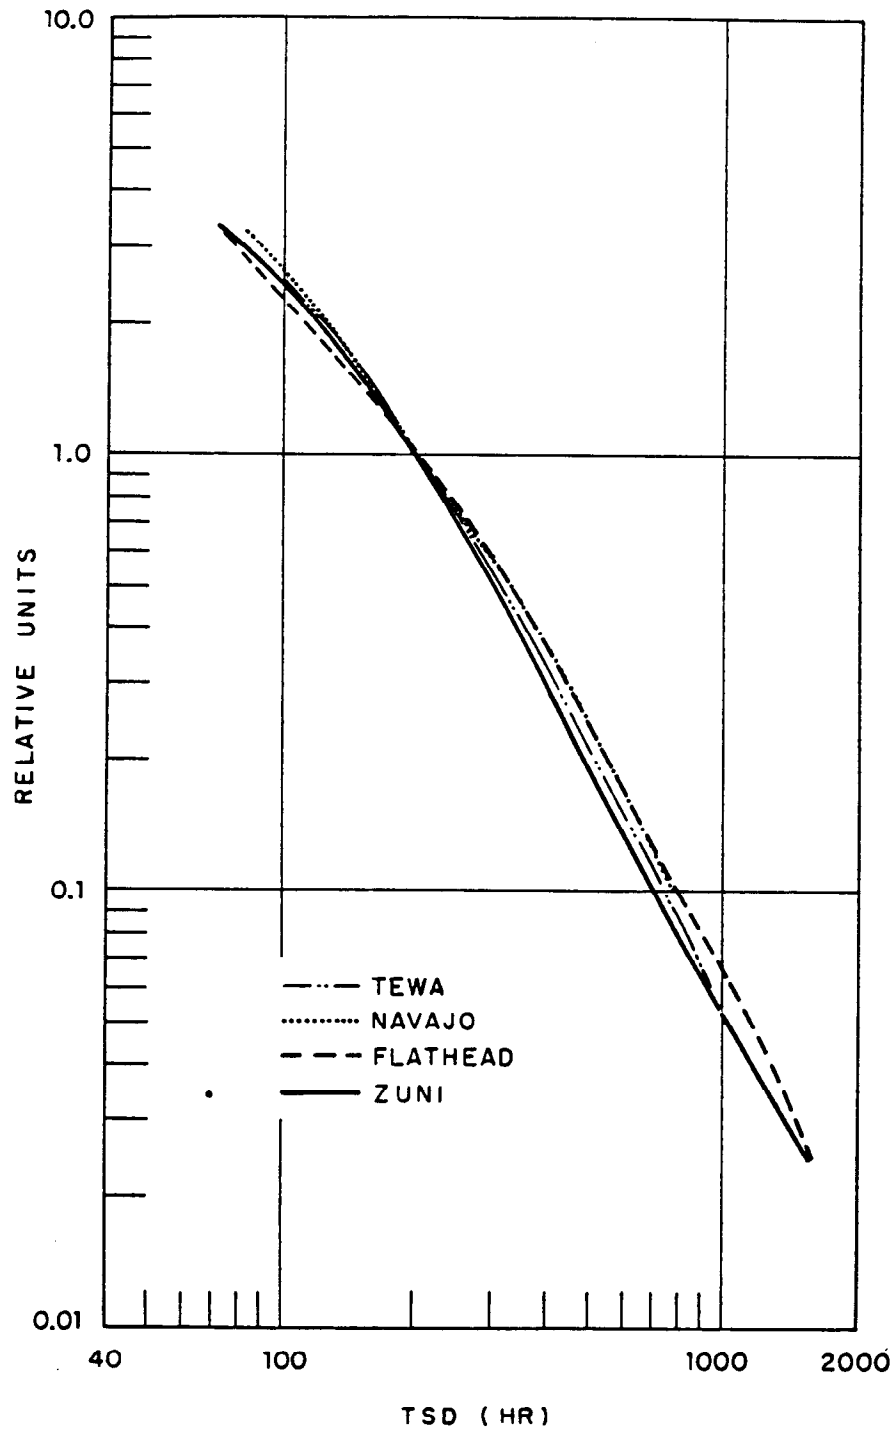


Figure B.14 Normalized dip-counter-decay curves.

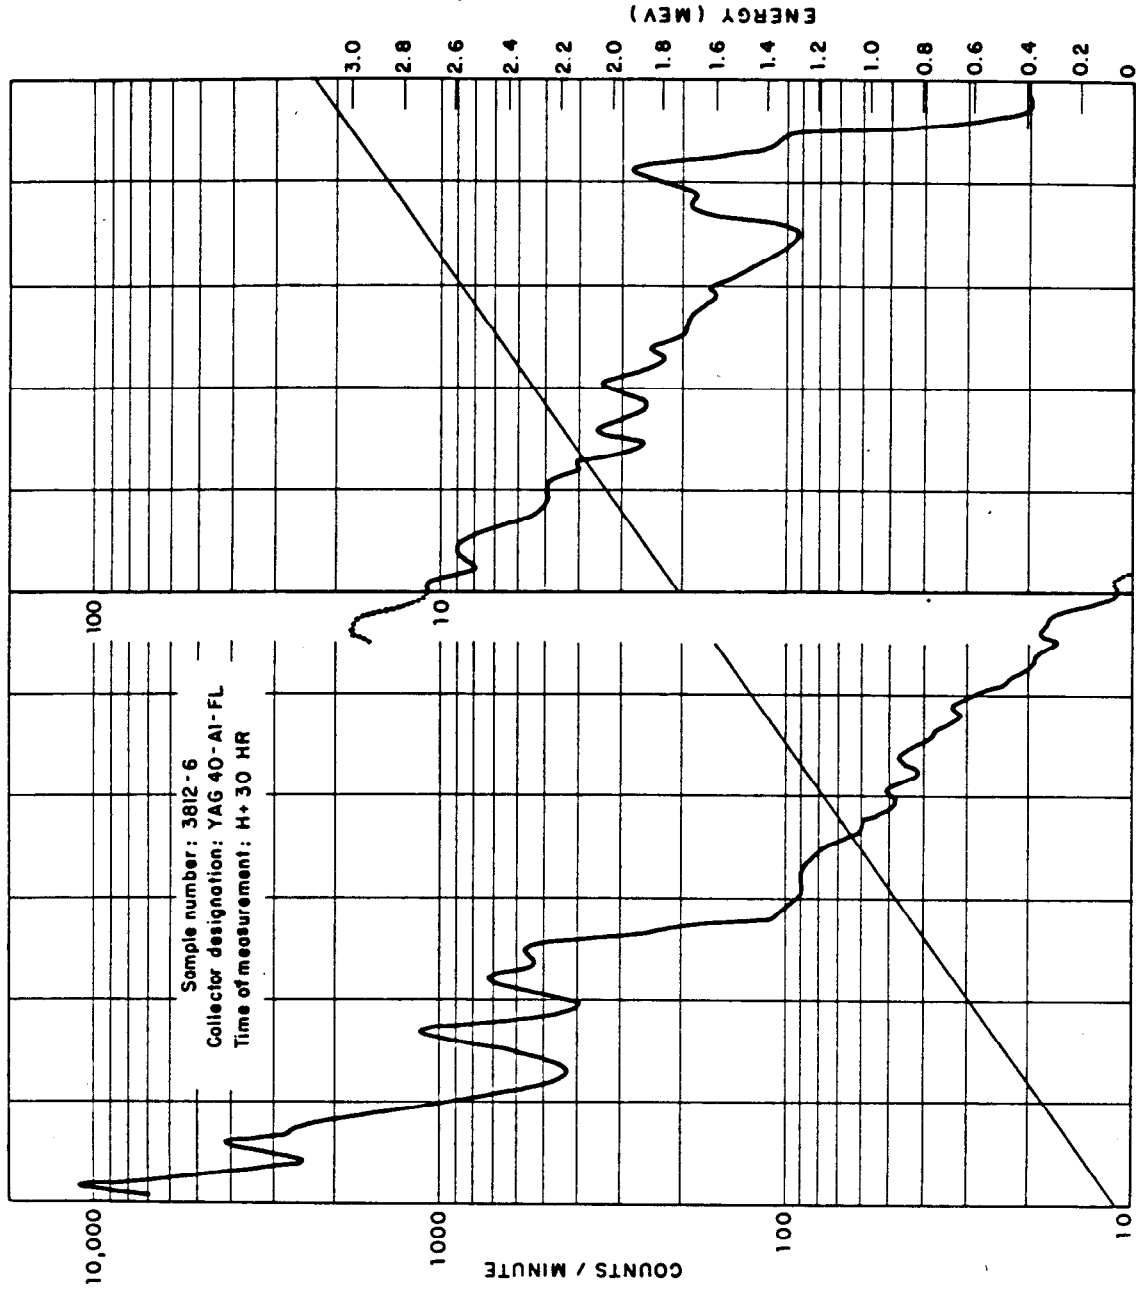


Figure B.15 Gamma spectra of slurry-particle insoluble solids, Shot Flathead.

307-308

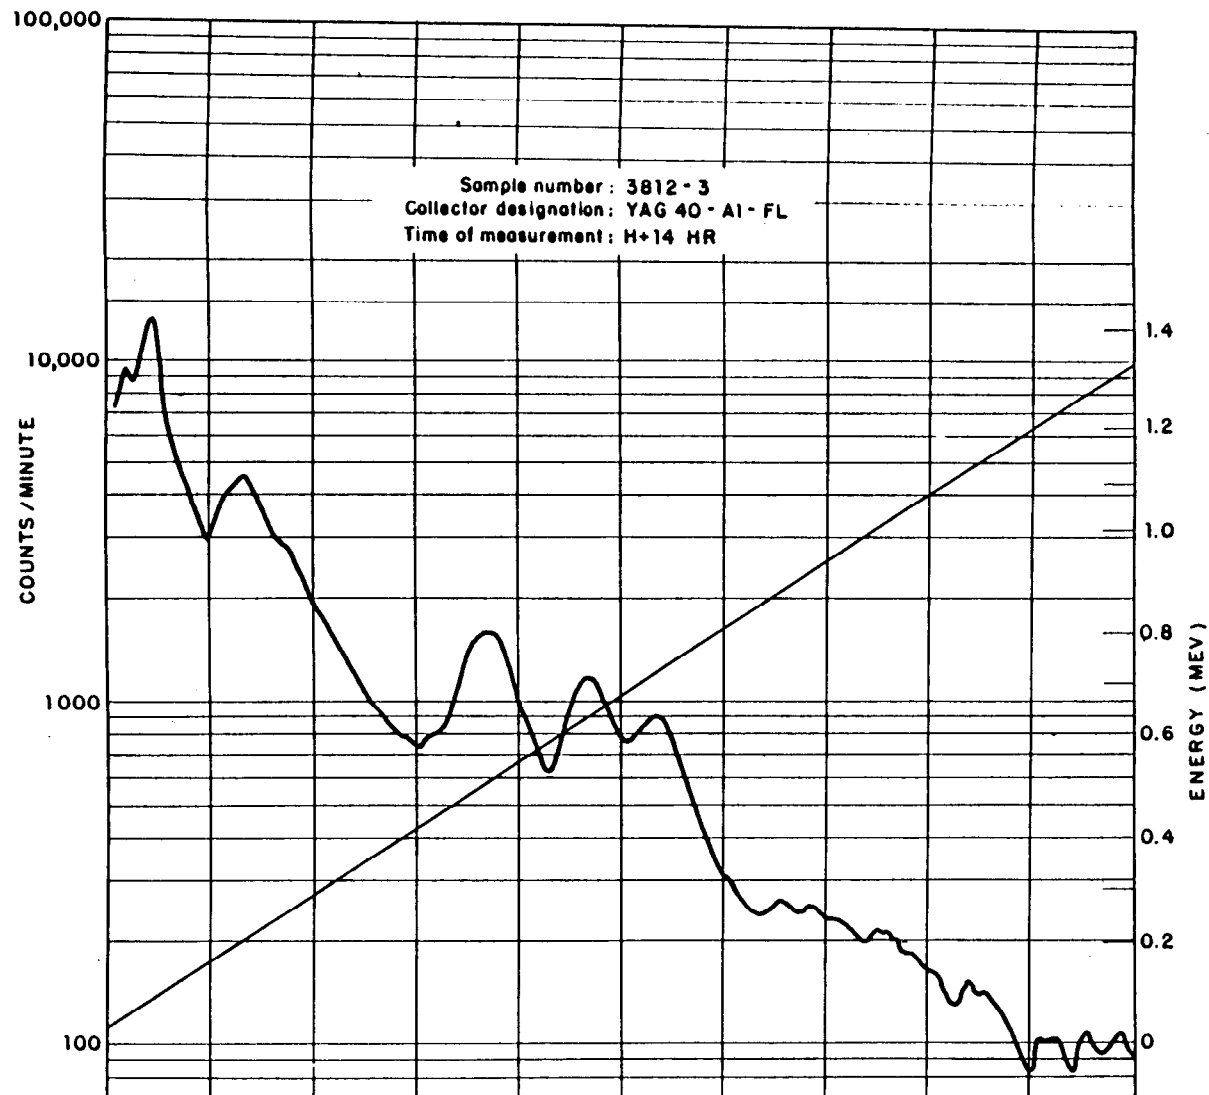


Figure B.16 Gamma spectra of slurry-particle reaction area, Shot Flathead.